


## Beam Stresses – Bending and Shear

### Notation:


$A$	= name for area	$n.a.$	= shorthand for neutral axis (N.A.)
$A_{web}$	= area of the web of a wide flange section	$O$	= name for reference origin
$b$	= width of a rectangle = total width of material at a horizontal section	$p$	= pitch of connector spacing
$c$	= largest distance from the neutral axis to the top or bottom edge of a beam	$P$	= name for a force vector
$d$	= calculus symbol for differentiation = depth of a wide flange section	$q$	= shear per length (shear flow)
$d_y$	= difference in the y direction between an area centroid ( $\bar{y}$ ) and the centroid of the composite shape ( $\hat{y}$ )	$Q$	= first moment area about a neutral axis
$E$	= modulus of elasticity or Young's modulus	$Q_{connected}$	= first moment area about a neutral axis for the connected part
$f_b$	= bending stress	$R$	= radius of curvature of a deformed beam
$f_c$	= compressive stress	$S$	= section modulus
$f_{max}$	= maximum stress	$S_{req'd}$	= section modulus required at allowable stress
$f_t$	= tensile stress	$t_w$	= thickness of web of wide flange
$f_v$	= shear stress	$V$	= internal shear force
$F_b$	= allowable bending stress	$V_{longitudinal}$	= longitudinal shear force
$F_{connector}$	= shear force capacity per connector	$V_T$	= transverse shear force
$h$	= height of a rectangle	$w$	= name for distributed load
$I$	= moment of inertia with respect to neutral axis bending	$x$	= horizontal distance
$I_x$	= moment of inertia with respect to an x-axis	$y$	= vertical distance
$L$	= name for length	$\bar{y}$	= the distance in the y direction from a reference axis ( $n.a.$ ) to the centroid of a shape
$M$	= internal bending moment = name for a moment vector	$\hat{y}$	= the distance in the y direction from a reference axis to the centroid of a composite shape
$n$	= number of connectors across a joint	$\Delta$	= calculus symbol for small quantity
		$\delta$	= elongation or length change
		$\epsilon$	= strain
		$\theta$	= arc angle
		$\Sigma$	= summation symbol

### Pure Bending in Beams

With bending moments along the axis of the member only, a beam is said to be in pure bending.

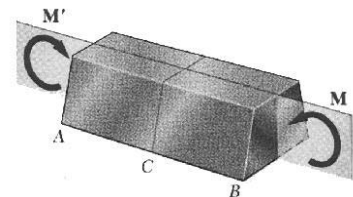

Normal stresses due to bending can be found for homogeneous materials having a plane of symmetry in the y axis that follow Hooke's law.

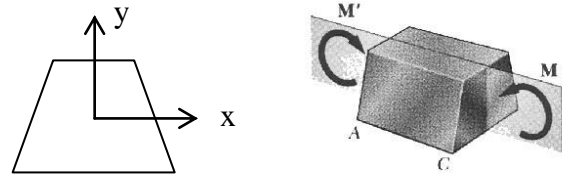

**Maximum Moment and Stress Distribution**

In a member of constant cross section, the maximum bending moment will govern the design of the section size when we know what kind of normal stress is caused by it.

For internal equilibrium to be maintained, the bending moment will be equal to the  $\sum M$  from the normal stresses  $\times$  the areas  $\times$  the moment arms. Geometric fit helps solve this statically indeterminate problem:

1. The normal planes remain normal for pure bending.
2. There is no net internal axial force.
3. Stress varies linearly over cross section.
4. Zero stress exists at the centroid and the line of centroids is the *neutral axis* (n. a)


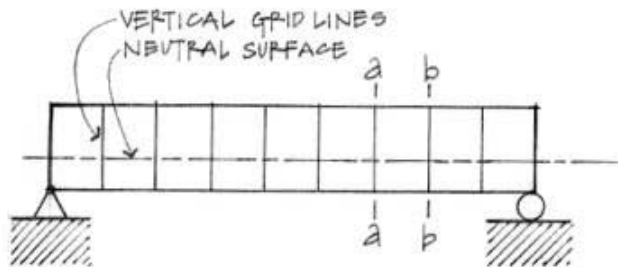


Figure 8.5(a) Beam elevation before loading.

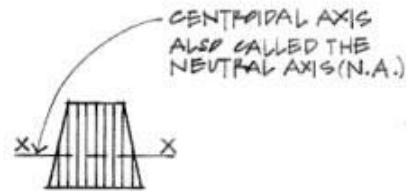

Beam cross section.

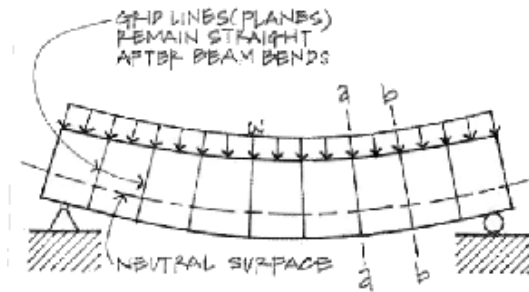


Figure 8.5(b) Beam bending under load.





Figure 8.8 Bending stresses on section b-b.

**Relations for Beam Geometry and Stress**

Pure bending results in a circular arc deflection.  $R$  is the distance to the center of the arc;  $\theta$  is the angle of the arc (radians);  $c$  is the distance from the n.a. to the *extreme fiber*;  $f_{max}$  is the maximum normal stress at the *extreme fiber*;  $y$  is a distance in  $y$  from the n.a.;  $M$  is the bending moment;  $I$  is the moment of inertia;  $S$  is the *section modulus*.

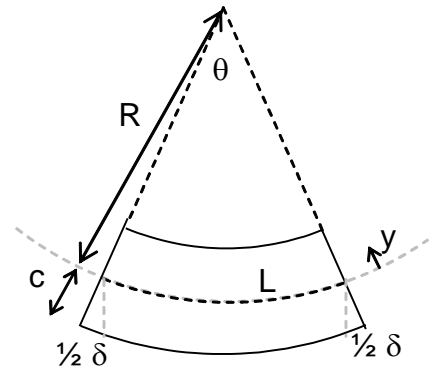

$$L = R\theta \quad \epsilon = \frac{\delta}{L} = \frac{y}{R} \quad f = E\epsilon = \frac{y}{c} f_{max}$$

$$M = \sum f_i A_i \quad M = \frac{f_{max}}{c} \sum y_i^2 A_i \quad I = \sum y^2 A \quad S = \frac{I}{c} \quad f_{max} = \frac{Mc}{I} = \frac{M}{S}$$

Now:  $f_b = \frac{My}{I}$  for a rectangle of height  $h$  and width  $b$ :  $S = \frac{bh^3}{12h/2} = \frac{bh^2}{6}$

RELATIONS:

$$\frac{1}{R} = \frac{M}{EI}$$

$$f_b = \frac{My}{I}$$

$$S = \frac{I}{c}$$

$$f_{b-max} = \frac{Mc}{I} = \frac{M}{S}$$

$$S_{required} \geq \frac{M}{F_b}$$

\*Note:  $y$  positive goes DOWN. With a positive  $M$  and  $y$  to the bottom fiber as positive, it results in a TENSION stress (we've called positive).


**Transverse Loading in Beams**

We are aware that transverse beam loadings result in internal shear and bending moments.

We designed sections based on bending stresses, since this stress dominates beam behavior.


There can be shear stresses *horizontally* within a beam member.

It can be shown that  $f_{horizontal} = f_{vertical}$

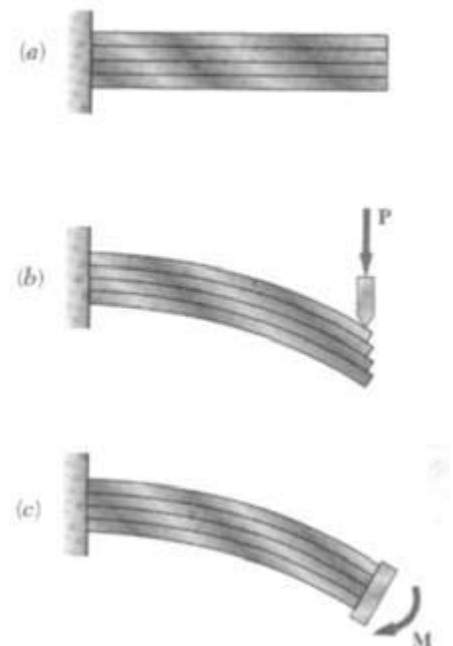

**Equilibrium and Derivation**

In order for equilibrium for any element CDD'C', there needs to be a horizontal force ΔH.

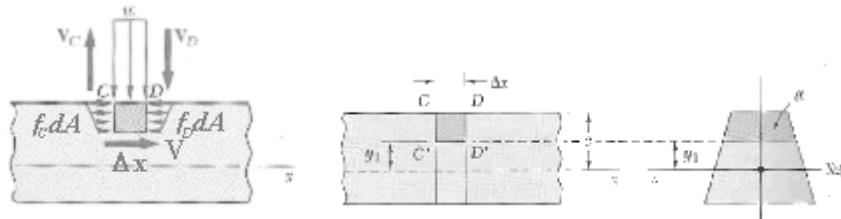

$$V = f_D dA - f_C dA$$

Q is a moment area with respect to the neutral axis of the area *above or below* the horizontal where the ΔH occurs.

Q is a maximum when y = 0 (at the **neutral axis**).

$$V_{longitudinal} = \frac{V_T Q}{I} \Delta x$$

q is a horizontal shear per unit length → *shear flow*


$$q = \frac{V_{longitudinal}}{\Delta x} = \frac{V_T Q}{I}$$

**Shearing Stresses**

$f_{v-ave} = 0$  on the beam's surface. Even if Q is a maximum at y = 0, we don't know that the thickness is a *minimum* there.

$$f_v = \frac{V}{\Delta A} = \frac{V}{b \cdot \Delta x}$$

$$f_{v-ave} = \frac{VQ}{Ib}$$

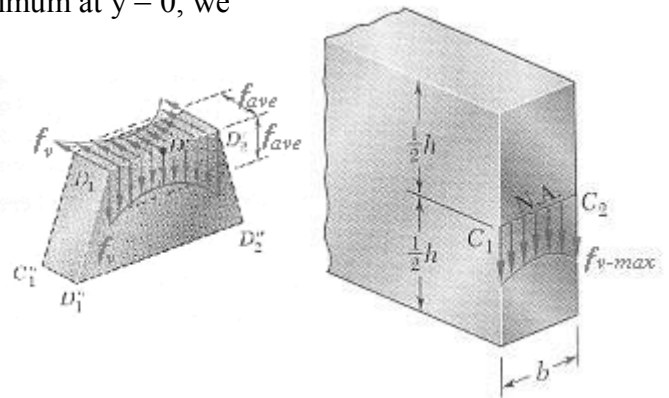

**Rectangular Sections**

$f_{v-max}$  occurs at the neutral axis:

$$I = \frac{bh^3}{12}$$

$$Q = A\bar{y} = b \frac{h}{2} \cdot \frac{1}{2} \frac{h}{2} = \frac{bh^2}{8}$$

then:

$$f_v = \frac{VQ}{Ib} = \frac{V \frac{1}{8} bh^2}{\frac{1}{12} bh^3 b} = \frac{3V}{2bh}$$

$$f_v = \frac{3V}{2A}$$






Fig. 6.15



### Webs of Beams

In steel W or S sections the thickness varies from the flange to the web.



We neglect the shear stress in the flanges and consider the shear stress in the web to be constant:

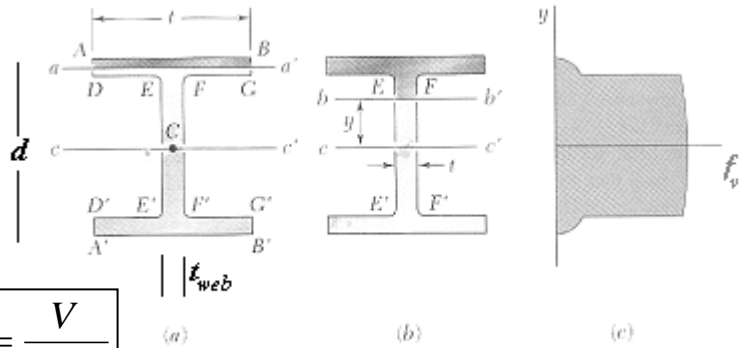

$$f_{v-max} = \frac{3V}{2A} \approx \frac{V}{A_{web}}$$

$$f_{v-max} = \frac{V}{t_{web}d}$$


Webs of I beams can fail in tension shear across a panel with stiffeners or the web can buckle.

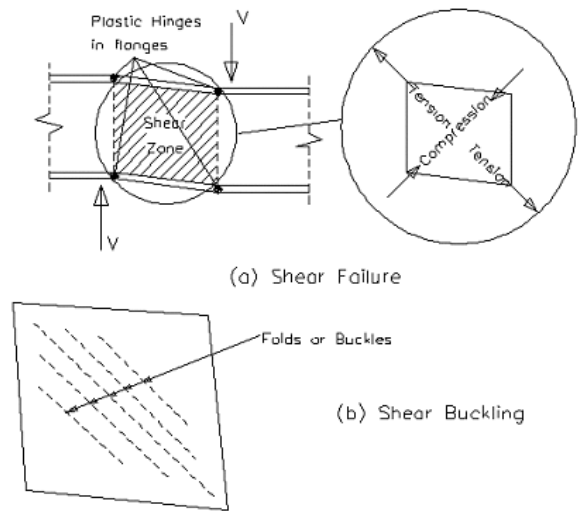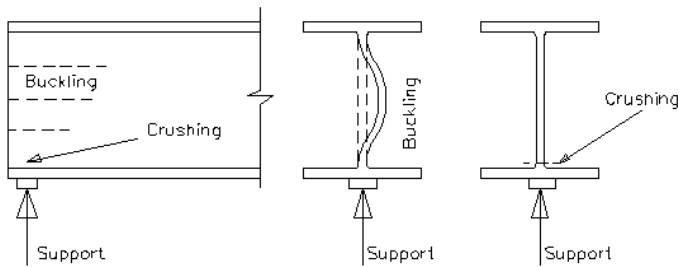


### Shear Flow

Even if the cut we make to find Q is not horizontal, but arbitrary, we can still find the shear flow, q, as long as the loads on thin-walled sections are applied in a plane of symmetry, and the cut is made perpendicular to the surface of the member.

$$q = \frac{VQ}{I}$$

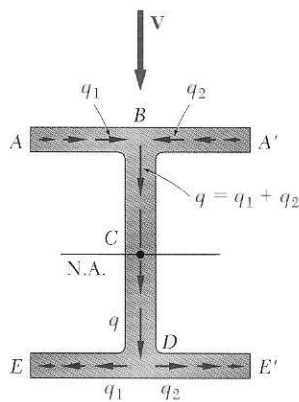



The shear flow magnitudes can be sketched by knowing Q.

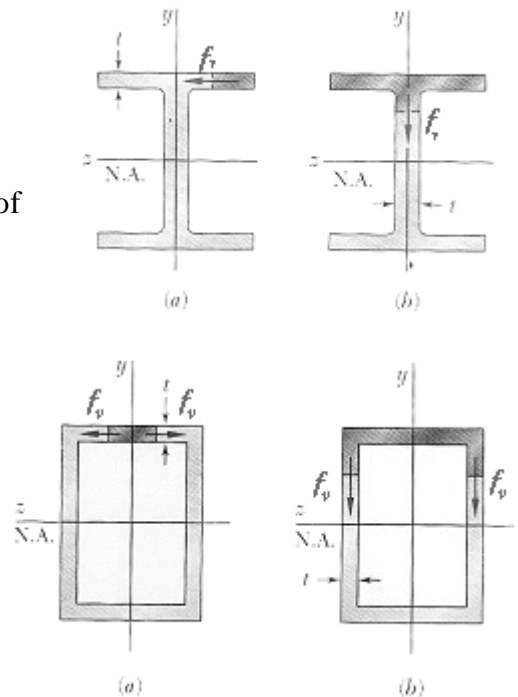

**Connectors to Resist Horizontal Shear in Composite Members**

Typical connections needing to resist shear are plates with nails or rivets or bolts in composite sections or splices.

The pitch (spacing) can be determined by the capacity in shear of the connector(s) to the shear flow over the spacing interval, p.



$$\frac{V_{longitudinal}}{p} = \frac{VQ}{I} \qquad V_{longitudinal} = \frac{VQ}{I} \cdot p$$

where

p = pitch length

$$nF_{connector} \geq \frac{VQ_{connected\ area}}{I} \cdot p$$

n = number of connectors connecting the connected area to the rest of the cross section

F = force capacity in one connector

$$Q_{connected\ area} = A_{connected\ area} \times y_{connected\ area}$$


y<sub>connected area</sub> = distance from the centroid of the connected area to the neutral axis

**Connectors to Resist Horizontal Shear in Composite Members**

Even vertical connectors have shear flow across them.

The spacing can be determined by the capacity in shear of the connector(s) to the shear flow over the spacing interval, p.


$$p \leq \frac{nF_{connector}I}{VQ_{connected\ area}}$$



**Unsymmetrical Sections or Shear**

If the section is not symmetric, or has a shear not in that plane, the member can bend and twist.

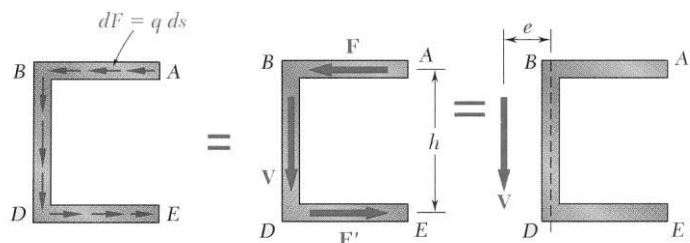

If the load is applied at the *shear center* there will not be twisting. This is the location where the moment caused by shear flow = the moment of the shear force about the shear center.





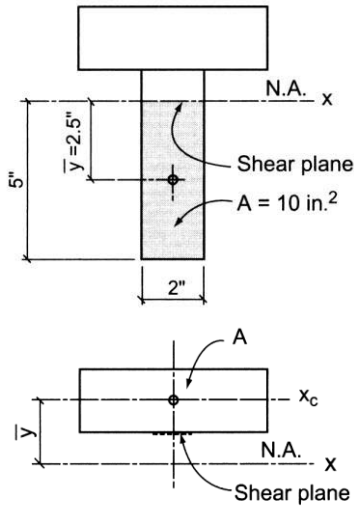
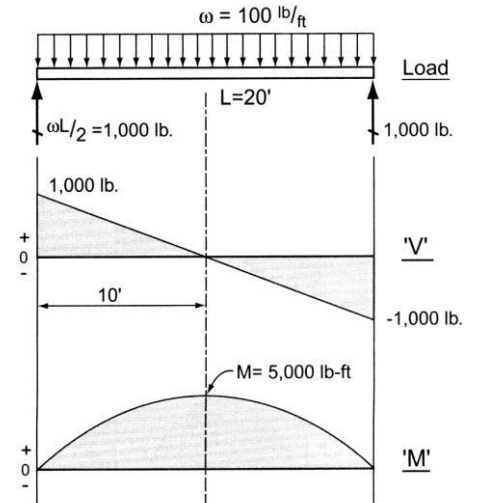
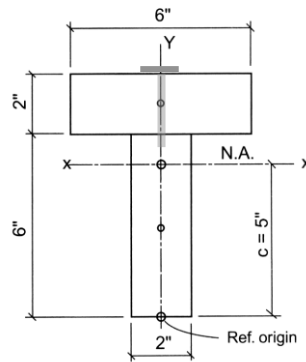
Example 1

Calculate the maximum bending and shear stress for the beam shown.

ALSO: Determine the minimum nail spacing required (pitch) if the shear capacity of a nail (F) is 250 lb.


Component	A (in. <sup>2</sup> )	$\bar{y}$ (in.)	$\bar{y}\Delta A$ (in. <sup>3</sup> )
	12	7	84
	12	3	36

Component	$I_{xc}$ (in. <sup>4</sup> )	A (in. <sup>2</sup> )	$d_y$ (in.)	$Ad_y^2$ (in. <sup>4</sup> )
	4	12	2	48
	36	12	2	48



**Example 2**


**8.11** A built-up plywood box beam with 2 x 4 S4S top and bottom flanges is held together by nails. Determine the pitch (spacing) of the nails if the beam supports a uniform load of 200 #/ft. along the 26-foot span. Assume the nails have a shear capacity of 80# each.

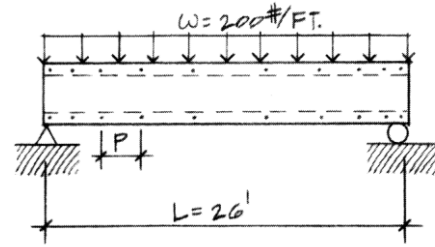

**Solution:**



Construct the shear (V) diagram to obtain the critical shear condition and its location

Note that the condition of shear is critical at the supports, and the shear intensity decreases as you approach the center line of the beam. This would indicate that the nail spacing P varies from the support to midspan. Nails are closely spaced at the support, but increasing spacing occurs toward midspan, following the shear diagram.

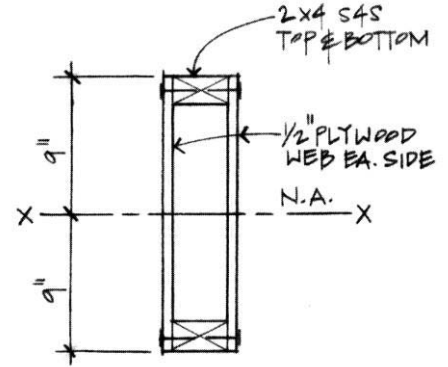


$$f_v = \frac{VQ}{Ib}$$

$$I_x = \frac{(4.5'')(18'')^3}{12} - \frac{(3.5'')(15'')^3}{12} = 1,202.6 \text{ in.}^4$$

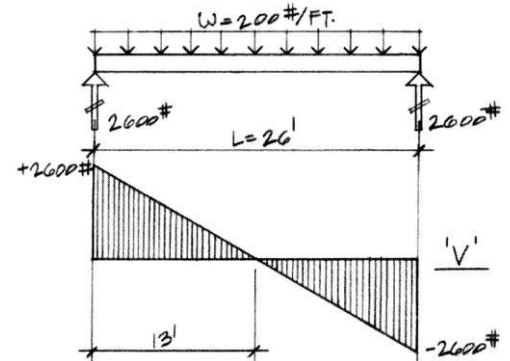

$$Q = \Sigma A\bar{y} = (9'')(1/2'')(4.5'') + (9'')(1/2'')(4.5'') + (1.5'')(3.5'')(8.25'') = 83.8 \text{ in}^3$$

$$f_{v\text{-max}} = \frac{(2,600\#)(83.3\text{in.}^3)}{(1,202.6\text{in.}^4)(1/2'' + 1/2'')} = 180.2 \text{ psi}$$



$$Q = A\bar{y} = (5.25 \text{ in.}^2)(8.25'') = 43.3 \text{ in.}^3$$

Shear force =  $f_v \times A_v$

where:


$A_v$  = shear area

Assume:

F = Capacity of two nails (one each side) at the flange; representing two shear surfaces

$$(n)F \geq f_v \times b \times p = \frac{VQ}{Ib} \times bp$$

$$\therefore (n)F \geq p \times \frac{VQ}{I}; \quad p \leq \frac{(n)FI}{VQ}$$

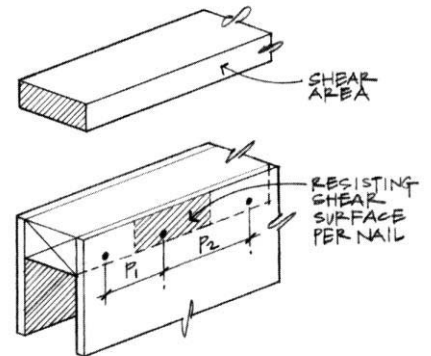

At the maximum shear location (support) where  $V = 2,600\#$

$$p \leq \frac{(2 \text{ nails} \times 80 \#/\text{nail})(1,202.6 \text{ in.}^4)}{(2,600\#)(43.3 \text{ in.}^3)} = 1.71''$$