


Connections & Stresses

Notation:


<p>A = area (net = with holes, bearing = in contact, etc...)</p> <p>d = diameter of a hole</p> <p>f_p = bearing stress (see P)</p> <p>f_t = tensile stress</p>	<p>f_v = shear stress</p> <p>P = name for axial force vector, as is T</p> <p>t = thickness</p> <p>π = pi (3.1415 radians or 180°)</p>
--	--

Bolts in Shear and Bearing


Single shear - forces cause only one shear “drop” across the bolt.

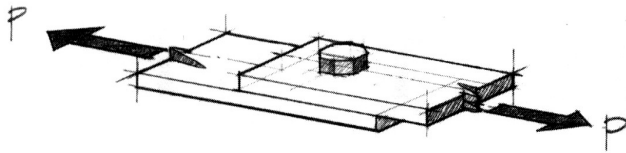


(a) Two steel plates bolted using one bolt.

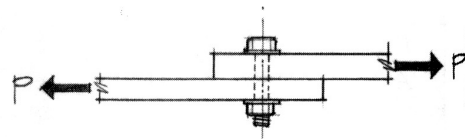

(b) Elevation showing the bolt in shear.



(c)



(d)

f_v = Average shear stress through bolt cross section

A = Bolt cross-sectional area


$$f_v = \frac{P}{A}$$

Figure 5.11 A bolted connection—single shear.

Double shear - forces cause two shear changes across the bolt.

$$f_v = \frac{P}{2A}$$

(two shear planes)

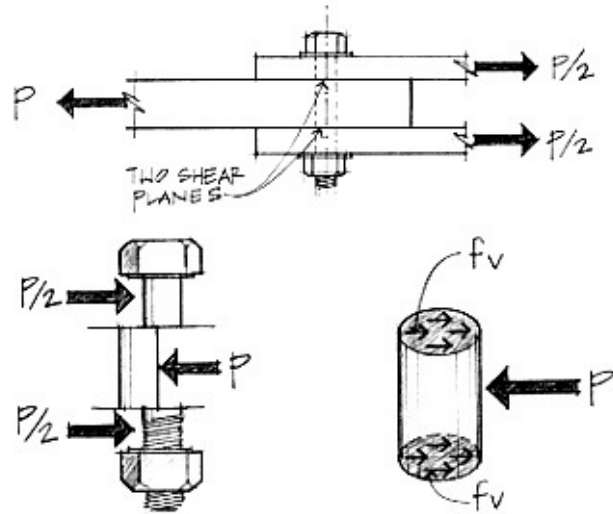


Free-body diagram of middle section of the bolt in shear.


Figure 5.12 A bolted connection in double shear.

Bearing of a bolt on a bolt hole – The bearing surface can be represented by *projecting* the cross section of the bolt hole on a plane (into a rectangle).

$$f_p = \frac{P}{A} = \frac{P}{td}$$

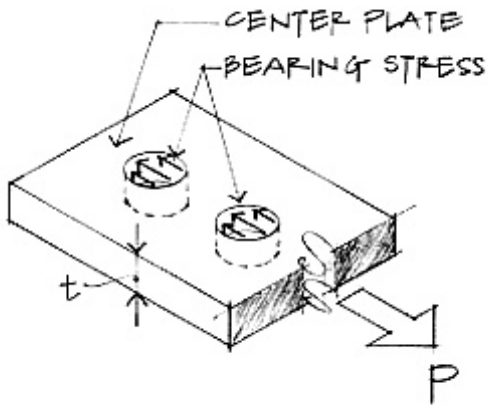

Bearing stress on plate.

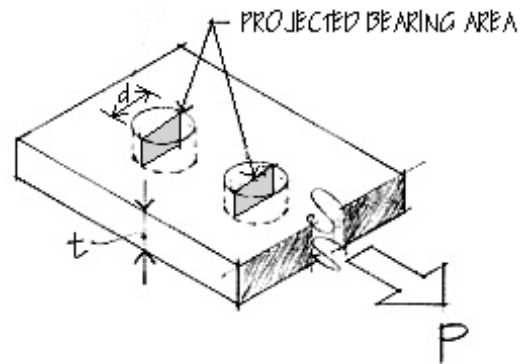

Example 1

A pipe storage rack is used for storing pipe in a shop. The support rack beam is fastened to the main floor beam using steel straps $\frac{1}{2}'' \times 2''$ in dimension. Round bolts are used to fasten the strap to the floor beam in single shear. (a) If the weight of the pipes impose a maximum tension load of 10,000 pounds in each strap, ~~determine the tension stress developed in the steel strap.~~ (b) Also, what diameter bolt is necessary to fasten the strap to the floor beam if the allowable shear stress for the bolts equals $F_v = 15,000 \text{ lb./in.}^2$? Determine the bearing stress in the strap from the bolt diameter chosen.

