

ARCH 614: Practice Quiz 8

Note: No aids are allowed for part 1. One side of a letter sized paper with notes is allowed during part 2, along with a silent, **non-programmable** calculator. There are reference charts on pages 2-6 for part 2.


Clearly show your work and answer.

Part 1) Worth 5 points (conceptual questions)

Part 2) Worth 45 points

(NOTE: The loading type [ex, live, dead, wind...] and sizes can and will be changed for the quiz with respect to the beam diagrams and formula provided.)

A wide flange beam of A992 steel ($F_y = 50$ ksi, $E = 30 \times 10^3$ ksi) is needed to span 32 ft and support uniformly distributed loads of 850 lb/ft of dead load (from materials), the self weight, and 1150 lb/ft of linearly distributed live load. The beam is simply supported with a maximum unbraced length of 11 ft.

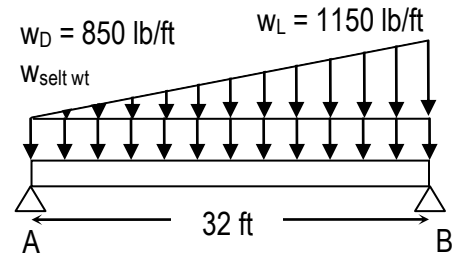

- Select the most economical beam based on flexural strength using the provided chart (including self weight). Assume that the dead load will determine the location of the maximum bending moment and superimpose the live load moment at that location.
- If a W21 x 44 ($A = 13.0 \text{ in.}^2$, $d = 20.66 \text{ in.}$, $t_w = 0.35 \text{ in.}$, $b_f = 6.50 \text{ in.}$, $t_f = 0.45 \text{ in.}$, $I_x = 843 \text{ in.}^4$) is chosen, is it adequate for shear with a self weight of 44 lb/ft?
- Determine the moment of inertia required such that the total [or live load or dead load] deflection, ignoring self weight, does not exceed 1.25 inches.


Answers – Not provided on actual quiz!

- $M_u = 248.3 \text{ k-ft}$, use W14x48 ($M_u^* > 250.5 \text{ k-ft}$)
- $V_u^* = 36.8 \text{ k}$, $\phi V_n = 216.9 \text{ k}$, \therefore OK
- $I_{req'd} = 897 \text{ in}^4$ [$I_{req'd-dead} = 535 \text{ in}^4$, $I_{req'd-live} = 362.3 \text{ in}^4$]

**Disclaimer: Answers have NOT
been painstakingly researched.**


REFERENCE CHARTS FOR QUIZ 8

1. SIMPLE BEAM—UNIFORMLY DISTRIBUTED LOAD

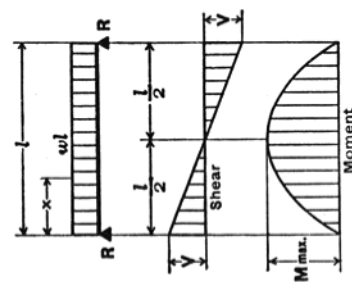


Total Equiv. Uniform Load = wl
 $R = V$ = $\frac{wl}{2}$
 V_x = $w \left(\frac{l}{2} - x \right)$
 M max. (at center) = $\frac{wl^2}{8}$
 M_x = $\frac{wx}{2} (l-x)$
 Δ max. (at center) = $\frac{5wl^4}{384EI}$
 Δ_x = $\frac{wx}{24EI} (l^3 - 2lx^2 + x^3)$

2. SIMPLE BEAM—LOAD INCREASING UNIFORMLY TO ONE END




Total Equiv. Uniform Load = $\frac{16W}{9\sqrt{3}} = 1.0264W$
 $R_1 = V_1$ = $\frac{W}{3}$ $W = \frac{wl}{2}$
 $R_2 = V_2$ max. = $\frac{2W}{3}$
 V_x = $\frac{W}{3} - \frac{Wx^2}{l^2}$
 M max. (at $x = \frac{l}{\sqrt{3}} = .5774l$) = $\frac{2Wl}{9\sqrt{3}} = .1283 Wl$
 M_x = $\frac{Wx}{3l^2} (l^2 - x^2)$
 Δ max. (at $x = l \sqrt{1 - \frac{\sqrt{8}}{15}} = .5193l$) = $.01304 \frac{Wl^3}{EI}$
 Δ_x = $\frac{Wx}{180EI l^2} (3x^4 - 10l^2x^2 + 7l^4)$

3. SIMPLE BEAM—LOAD INCREASING UNIFORMLY TO CENTER




Total Equiv. Uniform Load = $\frac{4W}{3}$ $W = \frac{wl}{2}$
 $R = V$ = $\frac{W}{2}$
 V_x (when $x < \frac{l}{2}$) = $\frac{W}{2l^2} (l^2 - 4x^2)$
 M max. (at center) = $\frac{Wl}{6}$
 M_x (when $x < \frac{l}{2}$) = $Wx \left(\frac{1}{2} - \frac{2x^2}{3l} \right)$
 Δ max. (at center) = $\frac{Wl^3}{60EI}$
 Δ_x (when $x < \frac{l}{2}$) = $\frac{Wx}{480EI l^3} (5l^3 - 4x^3)^2$

4. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED




$R_1 = V_1$ (max. when $a < c$) = $\frac{wb}{2l} (2c + b)$
 $R_2 = V_2$ (max. when $a > c$) = $\frac{wb}{2l} (2a + b)$
 V_x (when $x > a$ and $< (a+b)$) = $R_2 - wx (x-a)$
 M max. (at $x = a + \frac{R_1}{w}$) = $R_1 \left(a + \frac{R_1}{2w} \right)$
 M_x (when $x < a$) = $R_1 x$
 M_x (when $x > a$ and $< (a+b)$) = $R_1 x - \frac{w}{2} (x-a)^2$
 M_x (when $x > (a+b)$) = $R_2 (l-x)$

5. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED AT ONE END

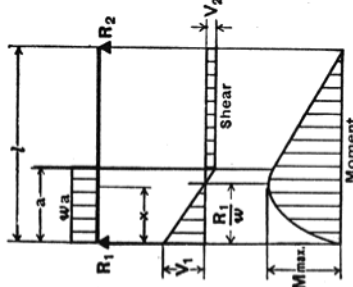

$R_1 = V_1$ max. = $\frac{wa}{2l} (2l-a)$
 $R_2 = V_2$ = $\frac{wa^2}{2l}$
 V_x (when $x < a$) = $R_1 - wx$
 M max. (at $x = \frac{R_1}{w}$) = $\frac{R_1^2}{2w}$
 M_x (when $x < a$) = $R_1 x - \frac{wx^2}{2}$
 M_x (when $x > a$) = $R_2 (l-x)$
 Δ_x (when $x < a$) = $\frac{wx}{24EI} (a^2(2l-a)^2 - 2ax^2(2l-a) + lx^3)$
 Δ_x (when $x > a$) = $\frac{wa^2(l-x)}{24EI} (4xl - 2x^2 - a^2)$


6. SIMPLE BEAM—UNIFORM LOAD PARTIALLY DISTRIBUTED AT EACH END

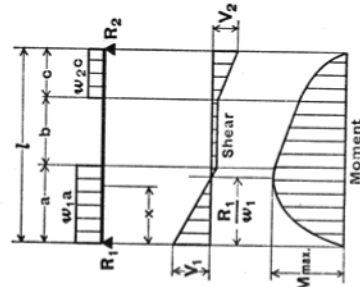

$R_1 = V_1$ = $\frac{w_1 a(2l-a) + w_2 c^2}{2l}$
 $R_2 = V_2$ = $\frac{w_2 c(2l-c) + w_1 a^2}{2l}$
 V_x (when $x < a$) = $R_1 - w_1 x$
 V_x (when $x > a$ and $< (a+b)$) = $R_1 - w_1 a$
 V_x (when $x > (a+b)$) = $R_2 - w_2 (l-x)$
 M max. (at $x = \frac{R_1}{w_1}$ when $R_1 < w_1 a$) = $\frac{R_1^2}{2w_1}$
 M max. (at $x = l - \frac{R_2}{w_2}$ when $R_2 < w_2 c$) = $\frac{R_2^2}{2w_2}$
 M_x (when $x < a$) = $R_1 x - \frac{w_1 x^2}{2}$
 M_x (when $x > a$ and $< (a+b)$) = $R_1 x - \frac{w_1 a}{2} (2x-a)$
 M_x (when $x > (a+b)$) = $R_2 (l-x) - \frac{w_2}{2} (l-x)^2$


REFERENCE CHARTS FOR QUIZ 8

7. SIMPLE BEAM—CONCENTRATED LOAD AT CENTER




Total Equiv. Uniform Load = 2P
 $R = V$ = $\frac{P}{2}$
 M max. (at point of load) = $\frac{Pl^2}{4}$
 M_x (when $x < \frac{l}{2}$) = $\frac{Px}{2}$
 Δ max. (at point of load) = $\frac{Pl^3}{48EI}$
 Δ_x (when $x < \frac{l}{2}$) = $\frac{Px}{48EI} (3l^2 - 4x^2)$

8. SIMPLE BEAM—CONCENTRATED LOAD AT ANY POINT




Total Equiv. Uniform Load = $\frac{8Pab}{l^2}$
 $R_1 = V_1$ (max. when $a < b$) = $\frac{Pb}{l}$
 $R_2 = V_2$ (max. when $a > b$) = $\frac{Pa}{l}$
 M max. (at point of load) = $\frac{Pab}{l}$
 M_x (when $x < a$) = $\frac{Pbx}{l}$
 M_x (when $x > a$) = $\frac{Pab(a+2b)}{27EI} - \frac{Pbx^2}{6EI}$
 Δ max. (at $x = \sqrt{\frac{a(a+2b)}{3}}$ when $a > b$) = $\frac{Pab^2}{3EI}$
 Δ_x (at point of load) = $\frac{Pbx}{6EI}$
 Δ_x (when $x < a$) = $\frac{Pbx}{6EI} (l^2 - b^2 - x^2)$

9. SIMPLE BEAM—TWO EQUAL CONCENTRATED LOADS SYMMETRICALLY PLACED

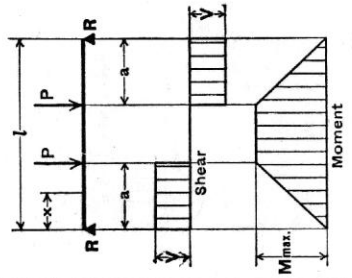


Total Equiv. Uniform Load = $\frac{8Pa}{l}$
 $R = V$ = P
 M max. (between loads) = Pa
 M_x (when $x < a$) = Px
 Δ max. (at center) = $\frac{Pa}{24EI} (3l^2 - 4a^2)$
 Δ_x (when $x < a$) = $\frac{Px}{6EI} (3l^2 - 3a^2 - x^2)$
 Δ_x (when $x > a$ and $< (l-a)$) = $\frac{Pa}{6EI} (3lx - 3x^2 - a^2)$

10. SIMPLE BEAM—TWO EQUAL CONCENTRATED LOADS UNSYMMETRICALLY PLACED




$R_1 = V_1$ (max. when $a < b$) = $\frac{P}{l} (l-a+b)$
 $R_2 = V_2$ (max. when $a > b$) = $\frac{P}{l} (l-b+a)$
 V_x (when $x > a$ and $< (l-b)$) = $\frac{P}{l} (b-a)$
 M_1 (max. when $a > b$) = $R_1 a$
 M_2 (max. when $a < b$) = $R_2 b$
 M_x (when $x < a$) = $R_1 x$
 M_x (when $x > a$ and $< (l-b)$) = $R_1 x - P(x-a)$

11. SIMPLE BEAM—TWO UNEQUAL CONCENTRATED LOADS UNSYMMETRICALLY PLACED



$R_1 = V_1$ = $\frac{P_1(l-a) + P_2b}{l}$
 $R_2 = V_2$ = $\frac{P_1a + P_2(l-b)}{l}$
 V_x (when $x > a$ and $< (l-b)$) = $R_1 - P_1$
 M_1 (max. when $R_1 < P_1$) = $R_1 a$
 M_2 (max. when $R_2 < P_2$) = $R_2 b$
 M_x (when $x < a$) = $R_1 x$
 M_x (when $x > a$ and $< (l-b)$) = $R_1 x - P_1(x-a)$

12. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—UNIFORMLY DISTRIBUTED LOAD

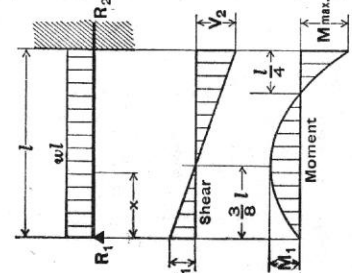


Total Equiv. Uniform Load = $\frac{wl}{8}$
 $R_1 = V_1$ = $\frac{3wl}{8}$
 $R_2 = V_2$ max. = $\frac{5wl}{8}$
 V_x = $R_1 - wx$
 M max. = $\frac{wl^2}{8}$
 M_1 (at $x = \frac{3}{8}l$) = $\frac{128}{185} \frac{wl^2}{l}$
 M_x = $R_1 x - \frac{wx^2}{2}$
 Δ max. (at $x = \frac{l}{16} (1 + \sqrt{33}) = .4215l$) = $\frac{wl^4}{185EI}$
 Δ_x = $\frac{wx}{48EI} (l^3 - 3lx^2 + 2x^3)$

REFERENCE CHARTS FOR QUIZ 8


13. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—CONCENTRATED LOAD AT CENTER

Total Equiv. Uniform Load = $\frac{3P}{2}$
 $R_1 = V_1$ = $\frac{5P}{16}$
 $R_2 = V_2$ max. = $\frac{11P}{16}$
 M max. (at fixed end) = $\frac{3Pl}{16}$
 M_1 (at point of load) = $\frac{5Pl}{32}$
 M_x (when $x < \frac{l}{2}$) = $\frac{5Px}{16}$
 M_x (when $x > \frac{l}{2}$) = $P \left(\frac{l}{2} - \frac{11x}{16} \right)$
 Δ max. (at $x = l \sqrt{\frac{1}{5}} = .4472l$) = $\frac{Pl^3}{48EI} \sqrt{5} = .009317 \frac{Pl^3}{EI}$
 Δx (at point of load) = $\frac{7Pl^3}{768EI}$
 Δx (when $x < \frac{l}{2}$) = $\frac{Px}{96EI} (3l^2 - 5x^2)$
 Δx (when $x > \frac{l}{2}$) = $\frac{P}{96EI} (x-l)^2 (11x - 2l)$

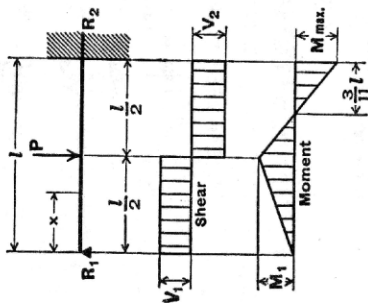


14. BEAM FIXED AT ONE END, SUPPORTED AT OTHER—CONCENTRATED LOAD AT ANY POINT

$R_1 = V_1$ = $\frac{Pb^2}{2l^3} (a + 2l)$
 $R_2 = V_2$ = $\frac{Pa}{2l^3} (3l^2 - a^2)$
 M_1 (at point of load) = R_1a
 M_2 (at fixed end) = $\frac{Pab}{2l^2} (a + l)$
 M_x (when $x < a$) = R_1x
 M_x (when $x > a$) = $R_1x - P(x - a)$
 Δ max. (when $a < .414l$ at $x = l \sqrt{\frac{12+a^2}{3l^2-a^2}} = \frac{Pa}{3EI} \frac{(l^2 - a^2)^{3/2}}{(3l^2 - a^2)^{3/2}}$
 Δ max. (when $a > .414l$ at $x = l \sqrt{\frac{a}{2l+a}} = \frac{Pab^2}{6EI} \sqrt{\frac{a}{2l+a}}$
 Δa (at point of load) = $\frac{Pa^2b^3}{12EI l^3} (3l + a)$
 Δx (when $x < a$) = $\frac{Pb^2x}{12EI l^3} (3a l^2 - 2lx^2 - ax^2)$
 Δx (when $x > a$) = $\frac{Pa}{12EI l^3} (l-x)^2 (3l^2x - a^2x - 2a^2l)$

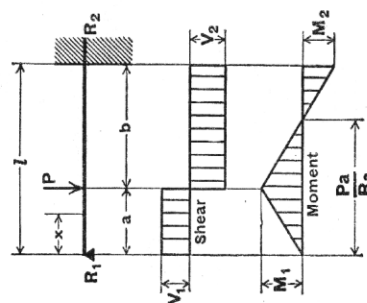


15. BEAM FIXED AT BOTH ENDS—UNIFORMLY DISTRIBUTED LOADS

Total Equiv. Uniform Load = $\frac{2wl}{3}$
 $R = V$ = $\frac{wl}{2}$
 V_x = $w \left(\frac{l}{2} - x \right)$
 M max. (at ends) = $\frac{12}{wl^2}$
 M_1 (at center) = $\frac{24}{wl^2}$
 M_x = $\frac{w}{12} (6lx - l^2 - 6x^2)$
 Δ max. (at center) = $\frac{wl^4}{384EI}$
 Δx = $\frac{wx^2}{24EI} (l - x)^2$




16. BEAM FIXED AT BOTH ENDS—CONCENTRATED LOAD AT CENTER

Total Equiv. Uniform Load = P
 $R = V$ = $\frac{P}{2}$
 M max. (at center and ends) = $\frac{Pl}{8}$
 M_x (when $x < \frac{l}{2}$) = $\frac{P}{8} (4x - l)$
 Δ max. (at center) = $\frac{Pl^3}{192EI}$
 Δx (when $x < \frac{l}{2}$) = $\frac{Px^2}{48EI} (3l - 4x)$




17. BEAM FIXED AT BOTH ENDS—CONCENTRATED LOAD AT ANY POINT

$R_1 = V_1$ (max. when $a < b$) = $\frac{Pb^2}{l^3} (3a + b)$
 $R_2 = V_2$ (max. when $a > b$) = $\frac{Pa^2}{l^3} (a + 3b)$
 M_1 (max. when $a < b$) = $\frac{Pab^2}{l^2}$
 M_2 (max. when $a > b$) = $\frac{Pa^2b}{l^2}$
 M_a (at point of load) = $\frac{2Pa^2b^2}{l^3}$
 M_x (when $x < a$) = $R_1x - \frac{Pab^2}{l^2}$
 Δ max. (when $a > b$ at $x = \frac{2al}{3a+b}$) = $\frac{2Pa^3b^2}{3EI (3a+b)^2}$
 Δa (at point of load) = $\frac{Pa^3b^3}{3EI l^3}$
 Δx (when $x < a$) = $\frac{Pb^2x^2}{6EI l^3} (3a l - 3ax - bx)$




REFERENCE CHARTS FOR QUIZ 8


18. CANTILEVER BEAM—LOAD INCREASING UNIFORMLY TO FIXED END

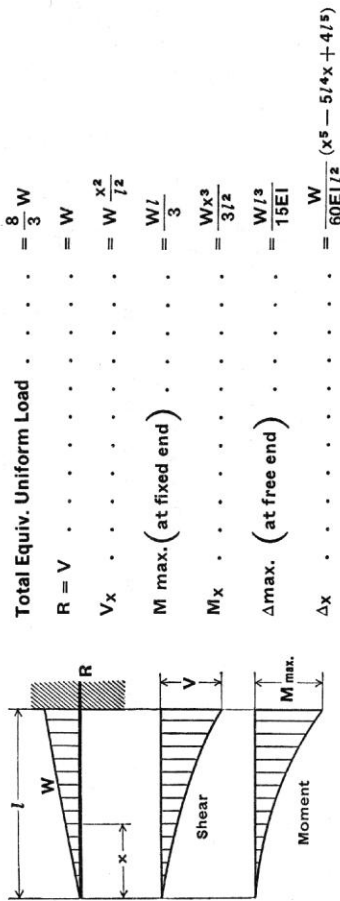


19. CANTILEVER BEAM—UNIFORMLY DISTRIBUTED LOAD

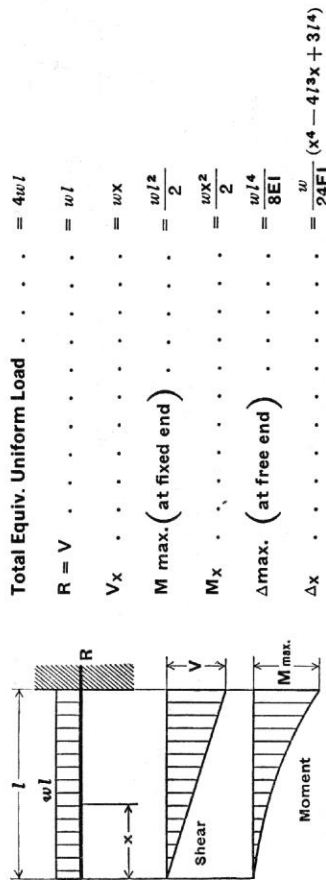


20. BEAM FIXED AT ONE END, FREE TO DEFLECT VERTICALLY BUT NOT ROTATE AT OTHER—UNIFORMLY DISTRIBUTED LOAD

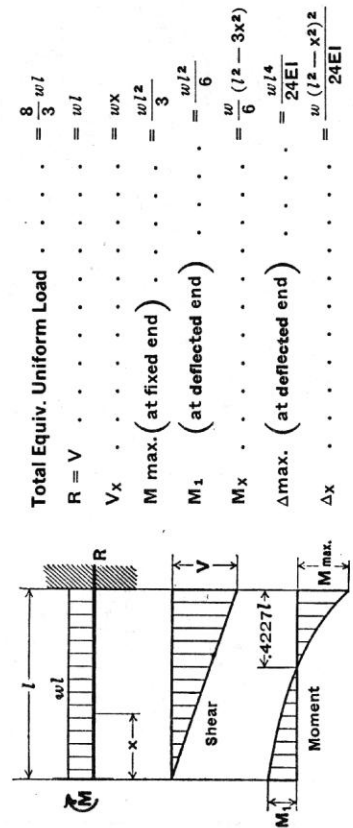

21. CANTILEVER BEAM—CONCENTRATED LOAD AT ANY POINT

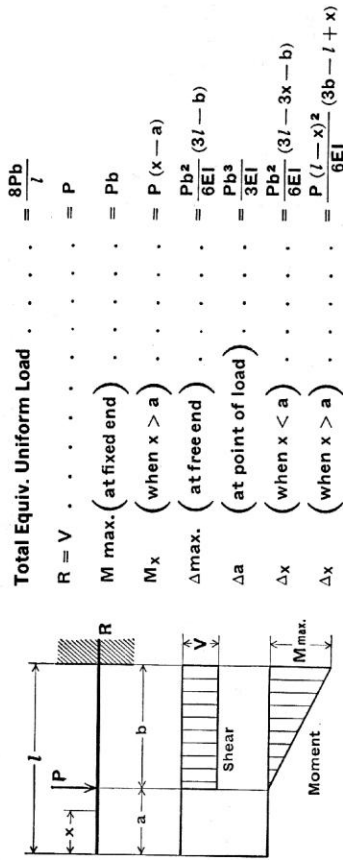

22. CANTILEVER BEAM—CONCENTRATED LOAD AT FREE END

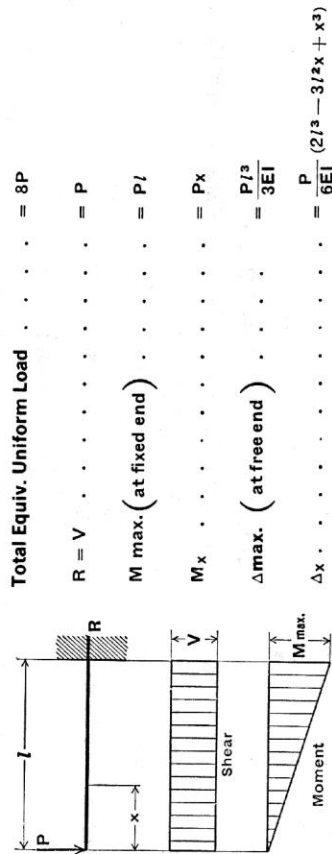

23. BEAM FIXED AT ONE END, FREE TO DEFLECT VERTICALLY BUT NOT ROTATE AT OTHER—CONCENTRATED LOAD AT DEFLECTED END

