

*ELEMENTS OF ARCHITECTURAL STRUCTURES:
FORM, BEHAVIOR, AND DESIGN*

ARCH 614

DR. ANNE NICHOLS

SPRING 2013

lecture
four

**mechanics
of materials**



www.carttalk.com

Mechanics of Materials

- MECHANICS



- MATERIALS



Mechanics of Materials

- *external loads and their effect on deformable bodies*
- *use it to answer question if structure meets requirements of*
 - *stability and equilibrium*
 - *strength and stiffness*
- *other principle building requirements*
 - *economy, functionality and aesthetics*

Knowledge Required

- *material properties*
- *member cross sections*
- *ability of a material to resist breaking*
- *structural elements that resist excessive*
 - *deflection*
 - *deformation*

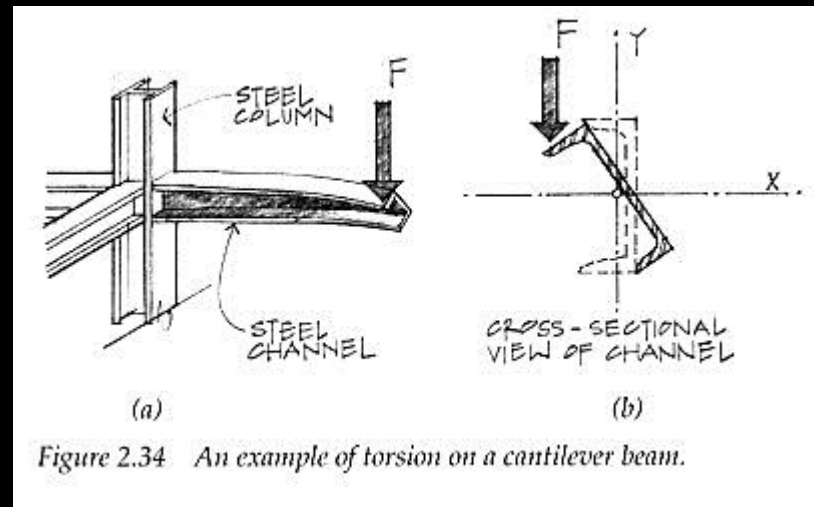


Figure 2.34 An example of torsion on a cantilever beam.

Problem Solving

1. STATICS:

*equilibrium of external forces,
internal forces, stresses*



2. GEOMETRY:

*cross section properties, deformations and
conditions of geometric fit, strains*

3. MATERIAL PROPERTIES:

*stress-strain relationship for each material
obtained from testing*

Stress

- *stress is a term for the intensity of a force, like a pressure*
- *internal or applied*
- *force per unit area*

$$\text{stress} = f = \frac{P}{A}$$



Design


- *materials have a critical stress value where they could break or yield*
 - *ultimate stress*
 - *yield stress*
 - *compressive stress*
 - *fatigue strength*
 - *(creep & temperature)*
- acceptance
vs. failure*

Design (cont)

- we'd like

$$f_{actual} \ll F_{allowable}$$


- stress distribution may vary: average
- uniform distribution exists IF the member is loaded axially (concentric)

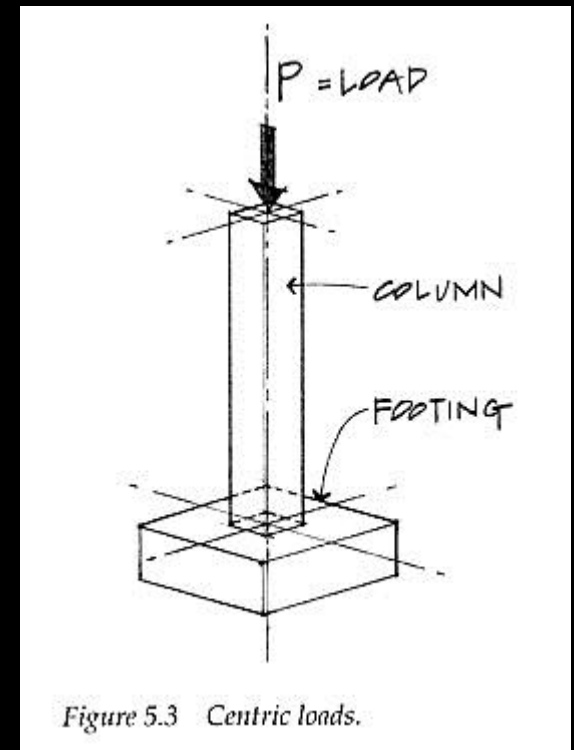

Scale Effect

- *model scale*
 - *material weights by volume, small section areas*
- *structural scale*
 - *much more material weight, bigger section areas*
- *scale for strength is not proportional:*


$$\frac{\gamma L^3}{L^2} = \gamma L$$

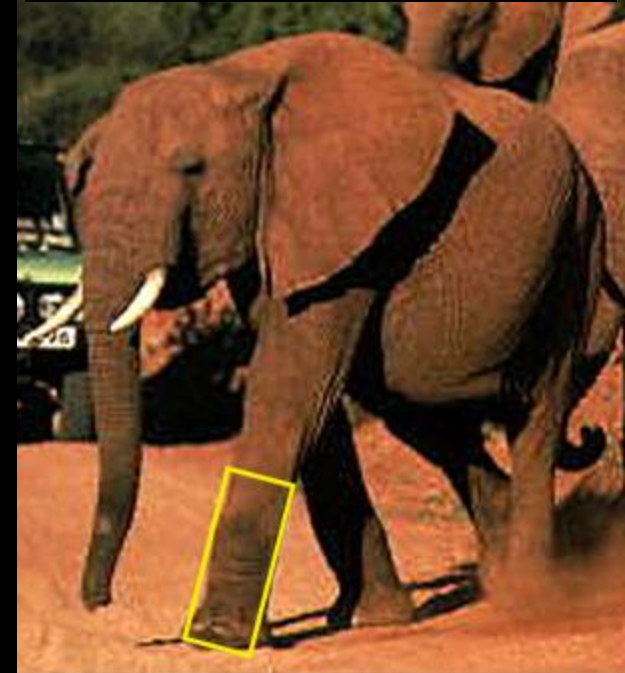

Normal Stress (direct)

- normal stress is normal to the cross section
 - stressed area is perpendicular to the load

$$f_{t \text{ or } c} \left(\sigma \right) = \frac{P}{A}$$

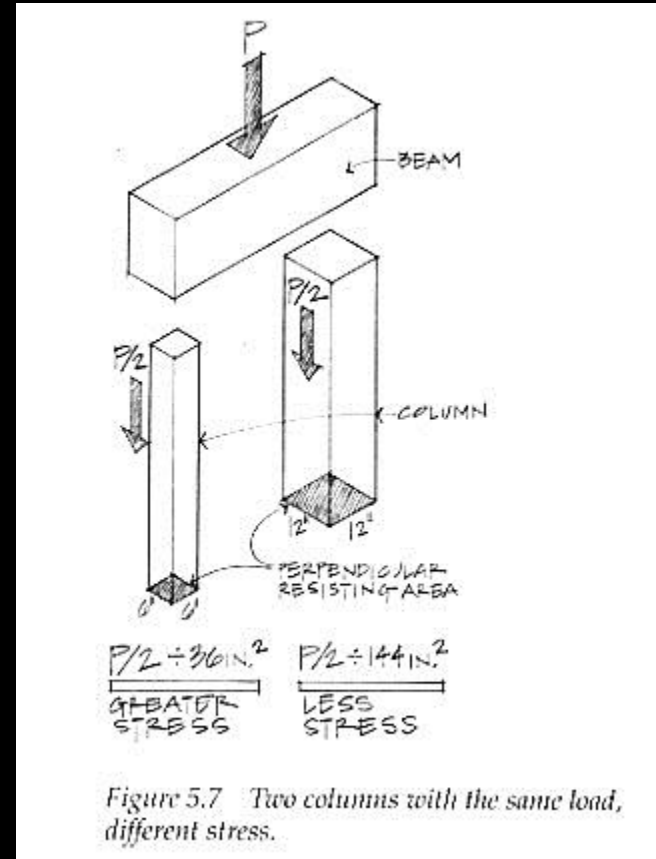

Shear Stress

- *stress parallel to a surface*

$$f_v = \frac{P}{A} = \frac{P}{td}$$

(τ_{ave})

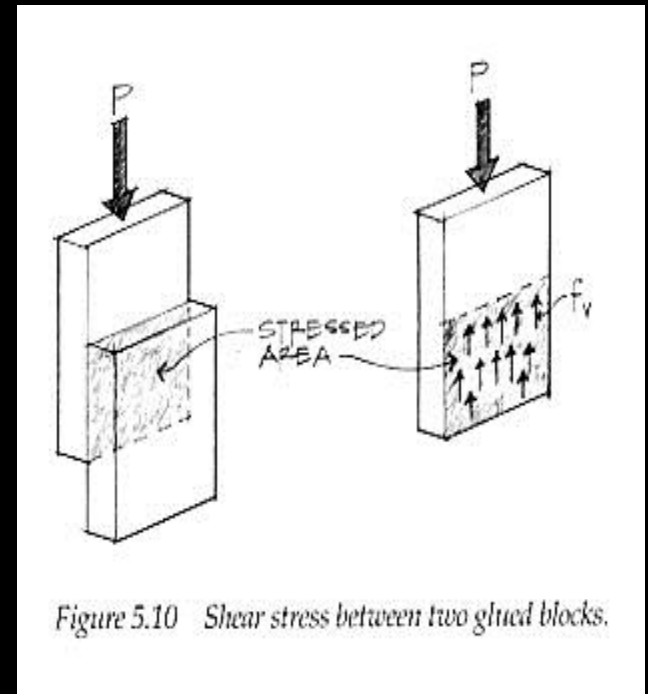



Figure 5.10 Shear stress between two glued blocks.

Bearing Stress

- *stress on a surface by contact in compression*

$$f_p = \frac{P}{A} = \frac{P}{td}$$


(σ)

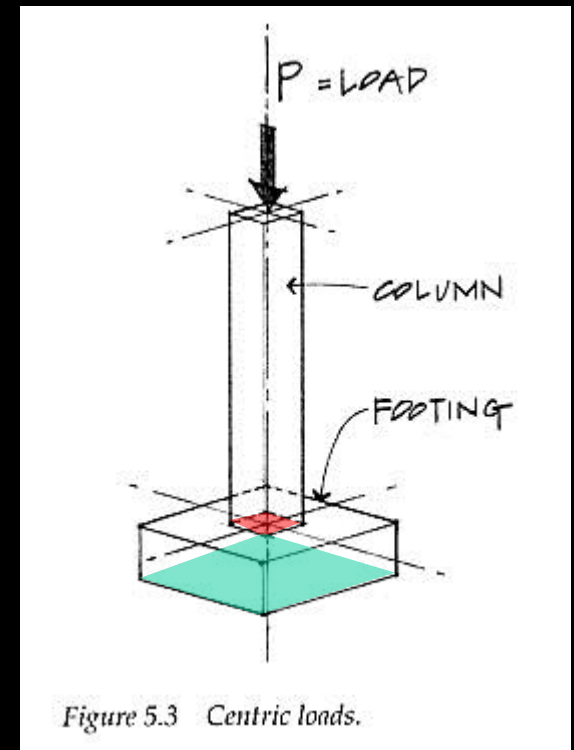

Bending Stress

- *normal stress caused by bending*

$$f_b \left(\sigma \right) = \frac{Mc}{I} = \frac{M}{S}$$

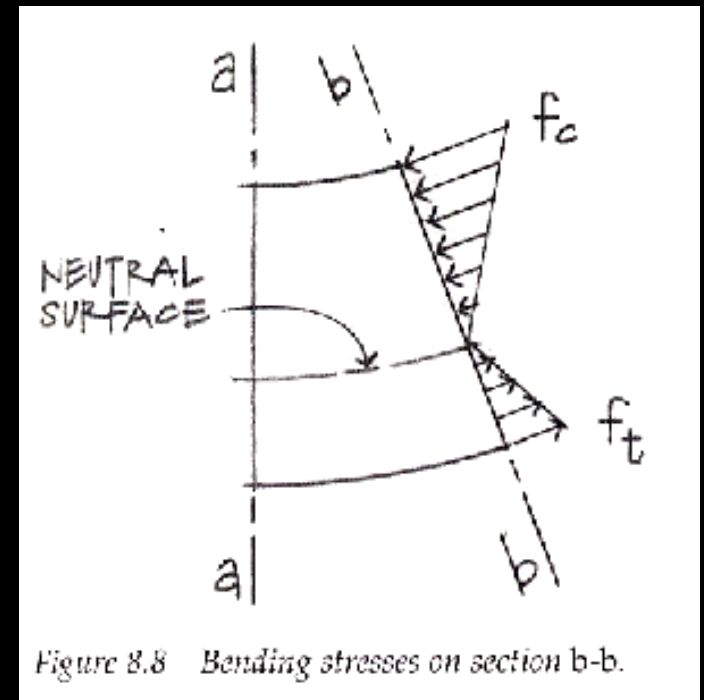


Torsional Stress

- *shear stress caused by twisting*


$$f_v = \frac{T\rho}{J}$$

(τ)

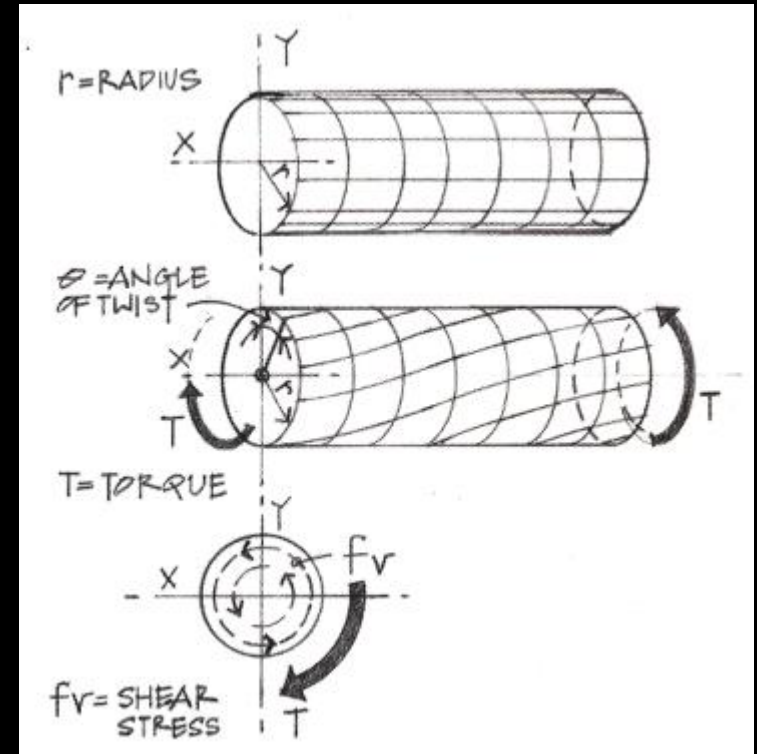


Structures and Shear

- *what structural elements see shear?*
 - *beams*
 - *bolts*
 - *splices*
 - *slabs*
 - *footings*
 - *walls*
 - *wind*
 - *seismic loads*

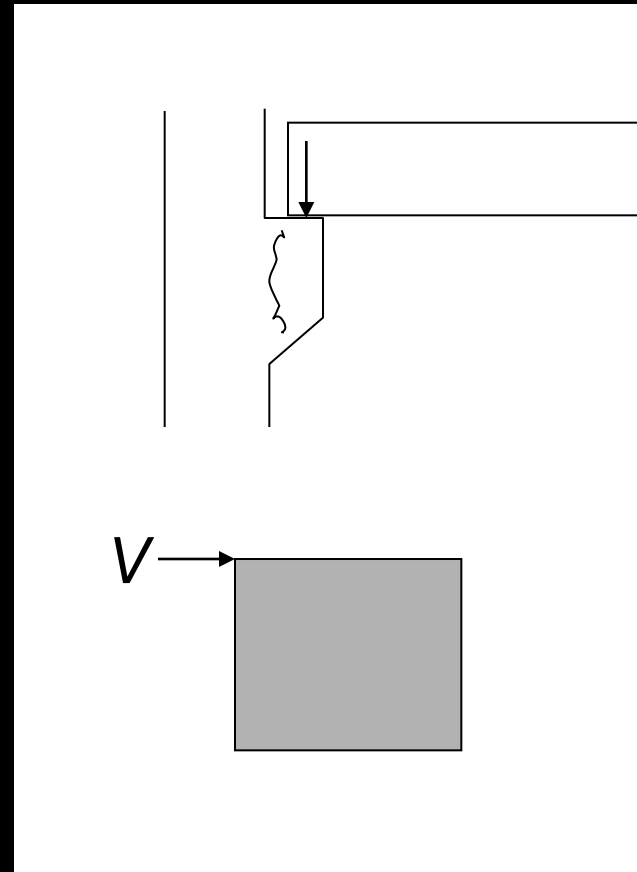


Bolts

- *connected members in tension cause shear stress*

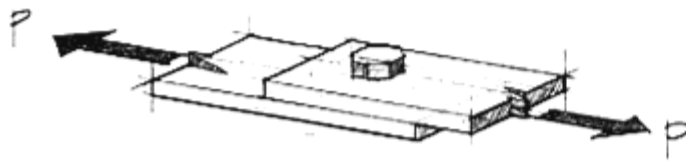


(a) Two steel plates bolted using one bolt.



(b) Elevation showing the bolt in


- *connected members in compression cause bearing stress*

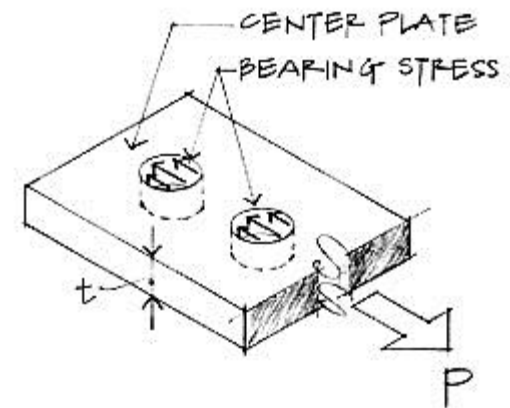

Bearing stress on plate.

Single Shear

- seen when 2 members are connected

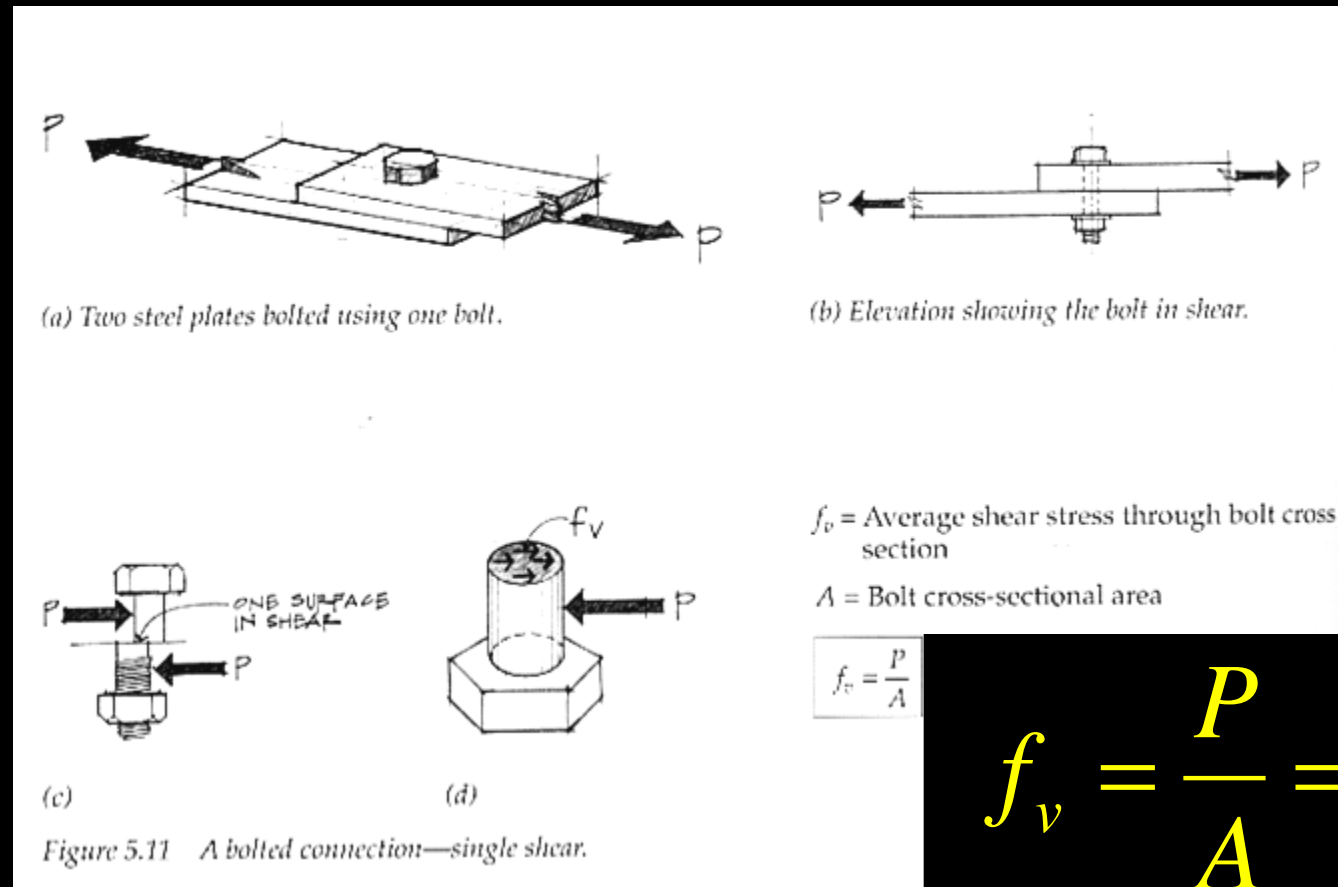


Double Shear

- *seen when 3 members are connected*
- two areas

$$f_v = \frac{P}{2A}$$

(two shear planes)

$$f_v = \frac{P}{2A} = \frac{P/2}{A} = \frac{P/2}{\pi d^2/4}$$

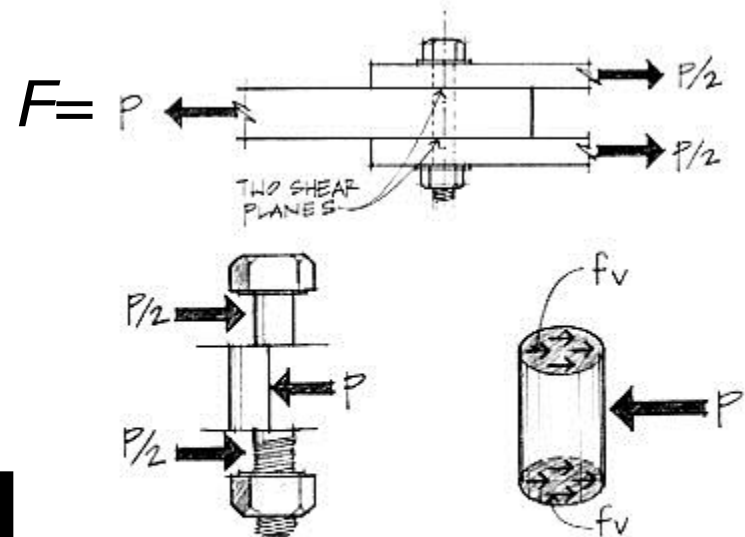


Free-body diagram of middle section of the bolt in shear.

Figure 5.12 A bolted connection in double shear.

Bolt Bearing Stress



- *compression & contact*
- *projected area*

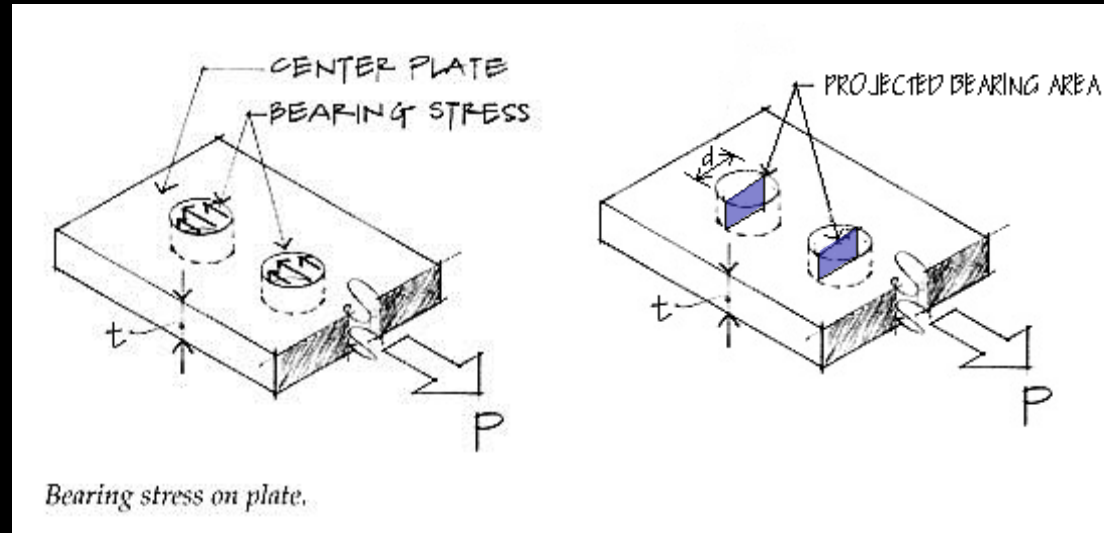

$$f_p = \frac{P}{A_{\text{projected}}} = \frac{P}{td}$$

Strain

- *materials deform*
- *axially loaded materials change length*
- *bending materials deflect*

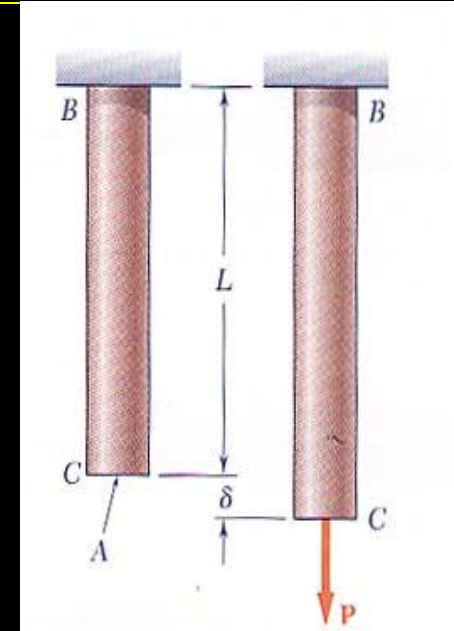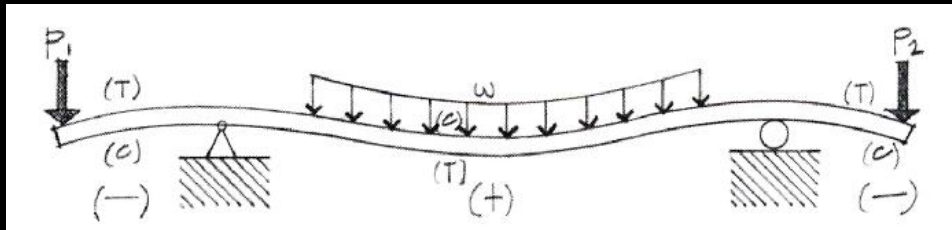

- **STRAIN:**


– change in length
over length + UNITLESS

$$\text{strain} = \varepsilon = \frac{\Delta L}{L}$$

(S)

Shearing Strain

- deformations with shear
- parallelogram
- change in angles
- stress: τ
- strain: γ
 - unitless (radians)

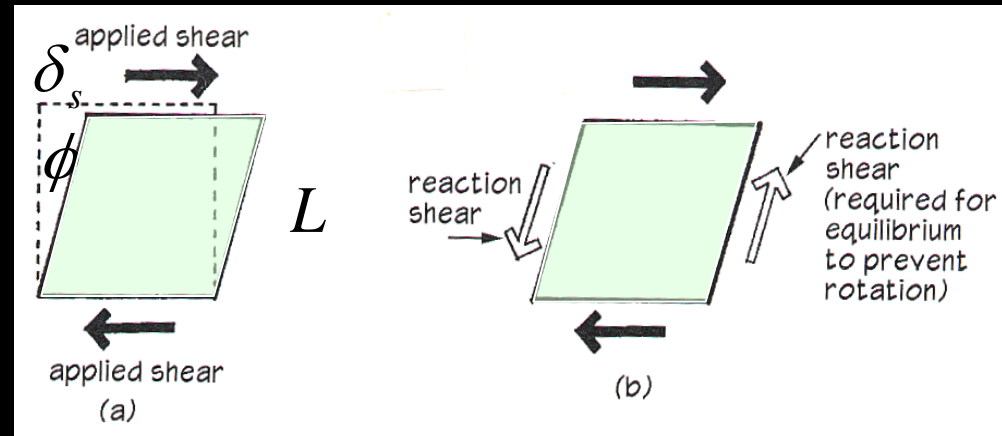


$$\gamma = \frac{\delta_s}{L} = \tan \phi \cong \phi$$

Shearing Strain




- *deformations with torsion*
- *twist*
- *change in angle of line*
- *stress:* τ
- *strain:* γ
– *unitless (radians)*

$$\gamma = \frac{\rho\phi}{L}$$

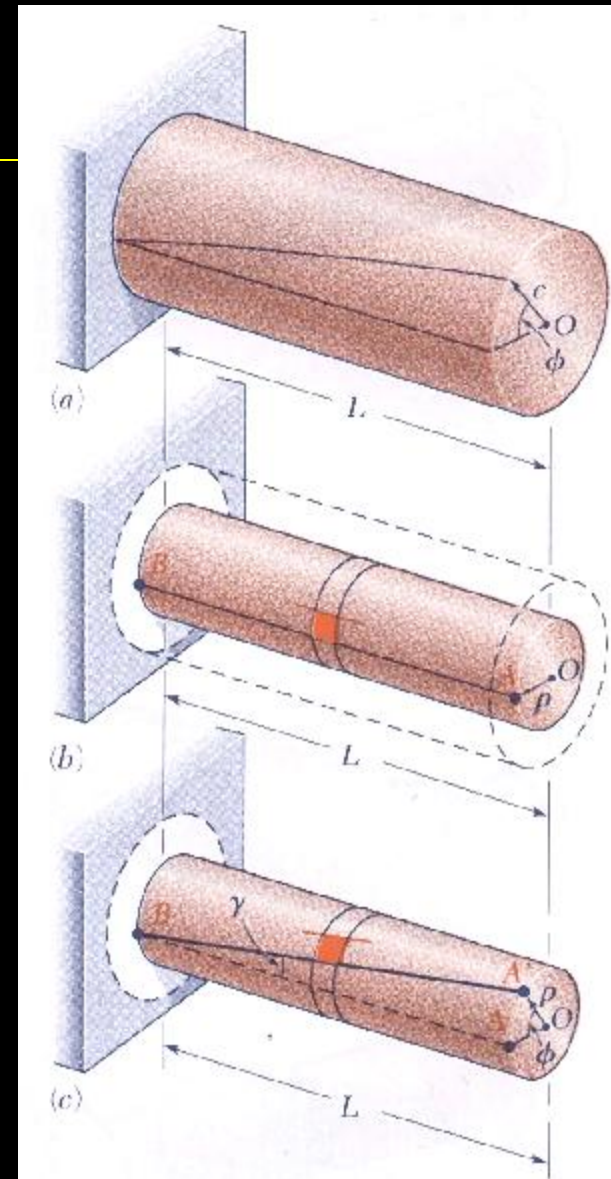

Load and Deformation

- for stress, need P & A
- for strain, need δ & L
 - how?
 - TEST with load and measure
 - plot P/A vs. ϵ

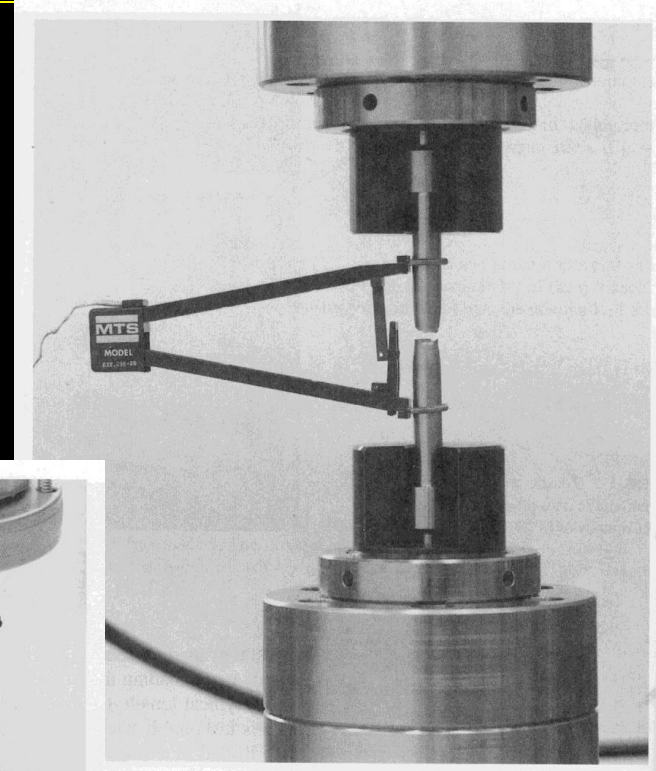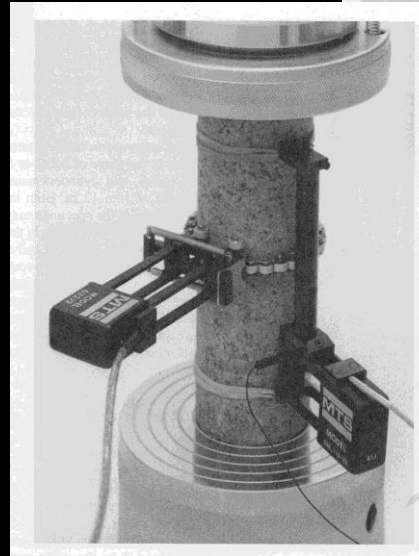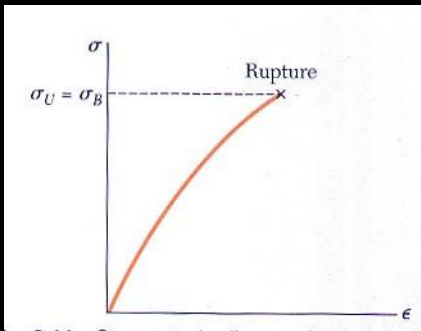

Material Behavior

- every material has its own response
 - 10,000 psi
 - $L = 10$ in
 - Douglas Fir vs. steel?

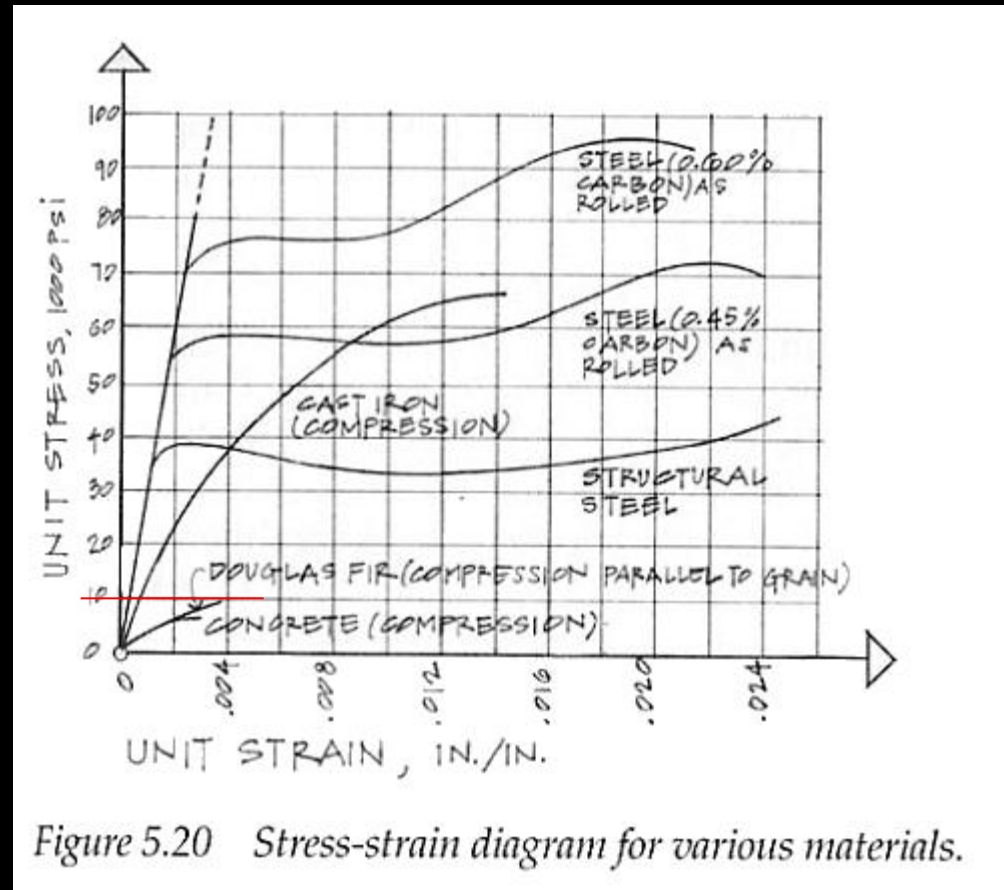


Figure 5.20 Stress-strain diagram for various materials.


Behavior Types

- ductile - “necking”
- true stress

$$f = \frac{P}{A}$$

- engineering stress
– (simplified)

$$f = \frac{P}{A_o}$$

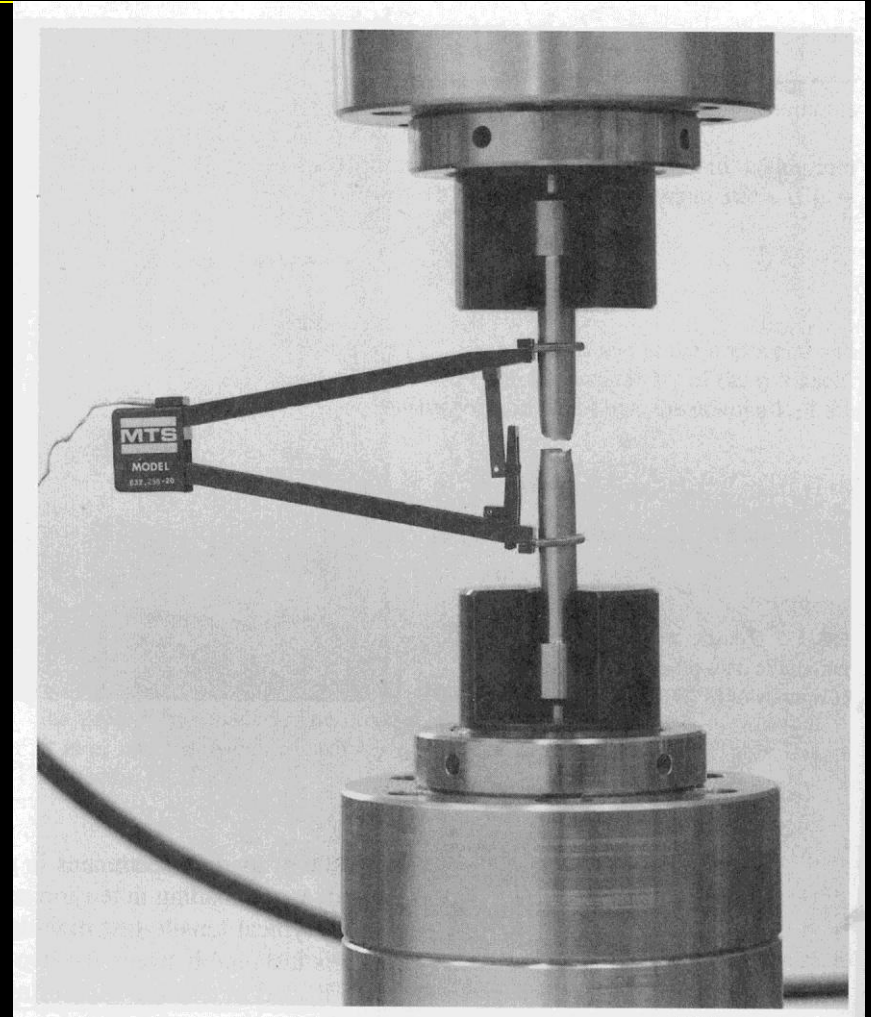

Behavior Types

- *brittle*

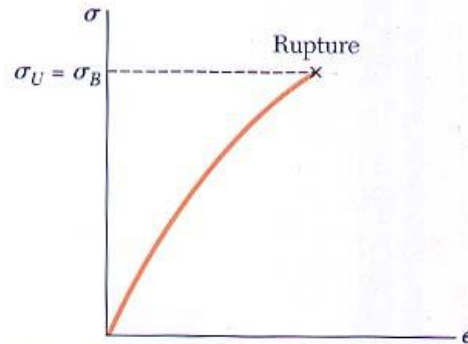


Fig. 2.11 Stress-strain diagram for a typical brittle material.

- *semi-brittle*

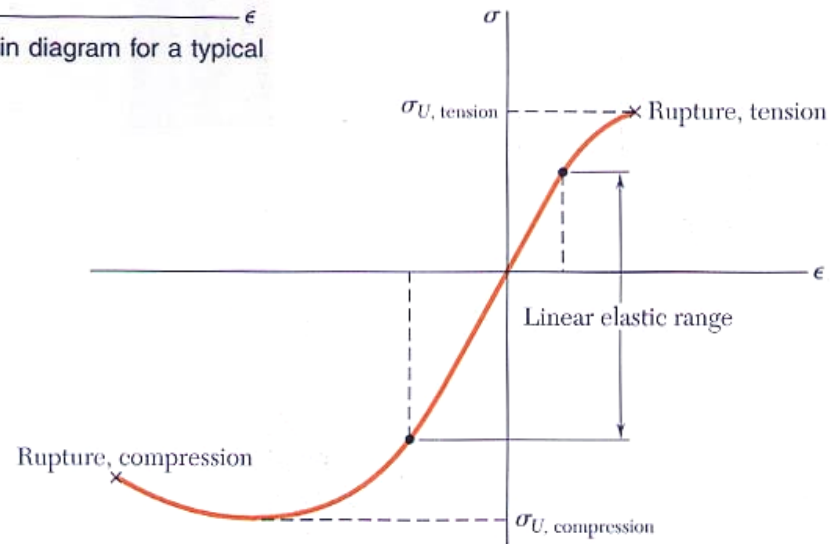


Fig. 2.14 Stress-strain diagram for concrete.

Stress to Strain

- important to us in f - ϵ diagrams:
 - straight section
 - LINEAR-ELASTIC
 - recovers shape (no permanent deformation)

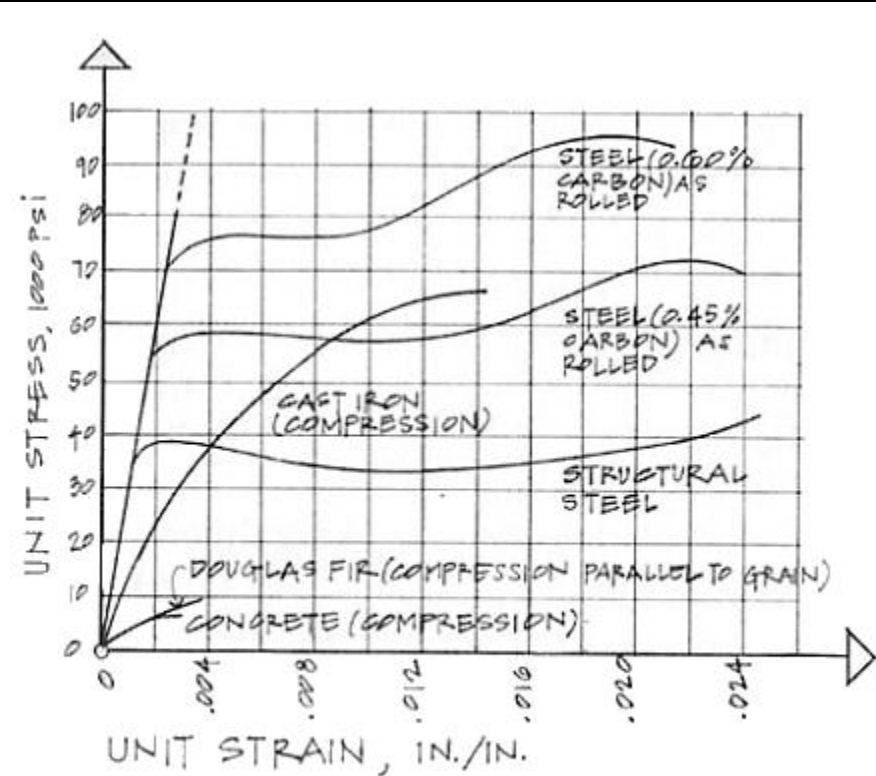




Figure 5.20 Stress-strain diagram for various materials.

Hooke's Law

- *straight line has constant slope*
- *Hooke's Law*

$$f = E \cdot \varepsilon$$

- *E*
 - *Modulus of elasticity*
 - *Young's modulus*
 - *units just like stress*

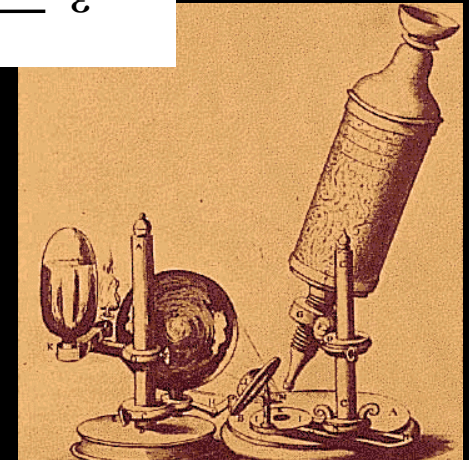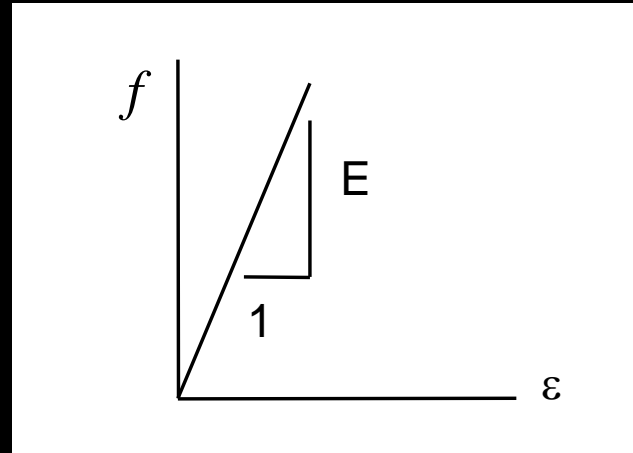

Stiffness

- *ability to resist strain*

- *steels*

- *same E*
- *different yield points*
- *different ultimate strength*


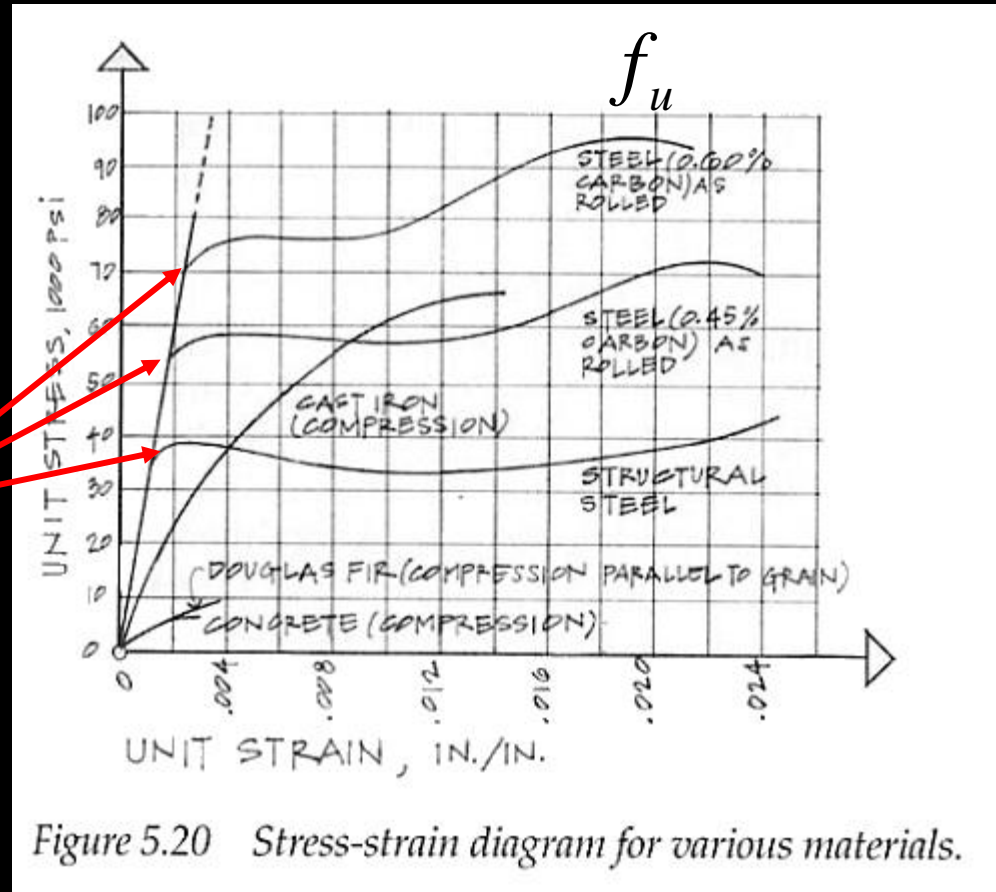


Figure 5.20 Stress-strain diagram for various materials.



Isotropy & Anisotropy

- **ISOTROPIC**
 - materials with E same at any direction of loading
 - ex. steel
- **ANISOTROPIC**
 - materials with different E at any direction of loading
 - ex. wood is orthotropic

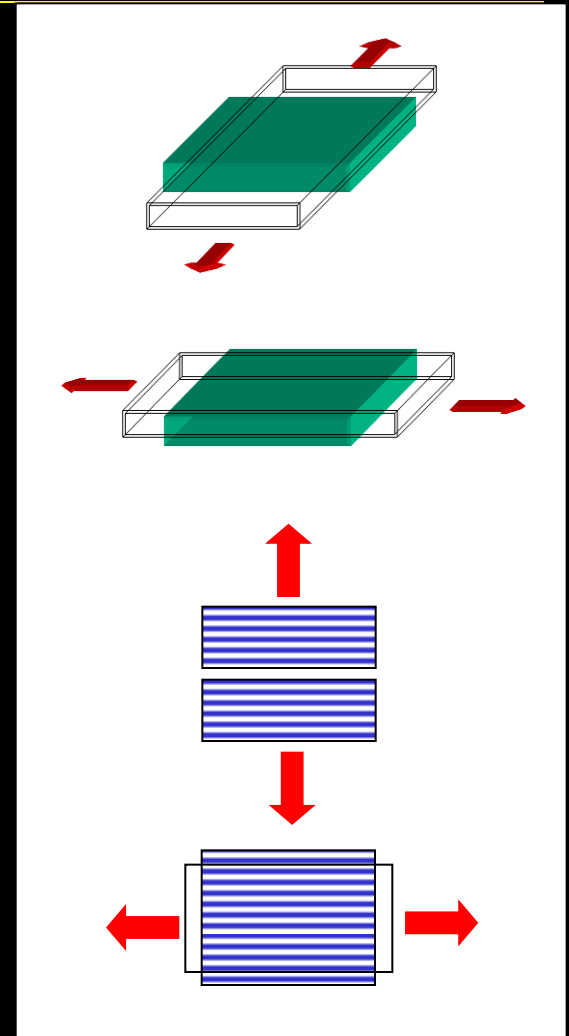

Elastic, Plastic, Fatigue

- *elastic springs back*
- *plastic has permanent deformation*
- *fatigue caused by reversed loading cycles*

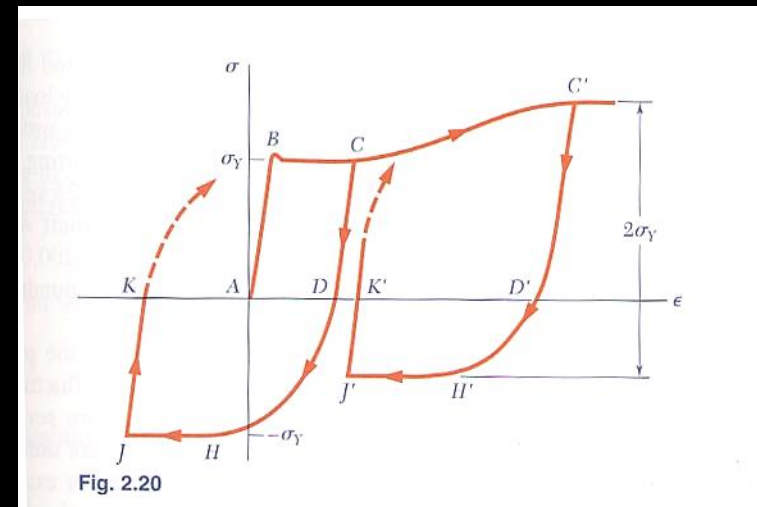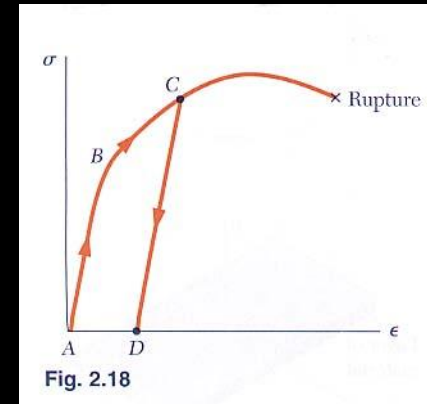

Plastic Behavior

- ductile

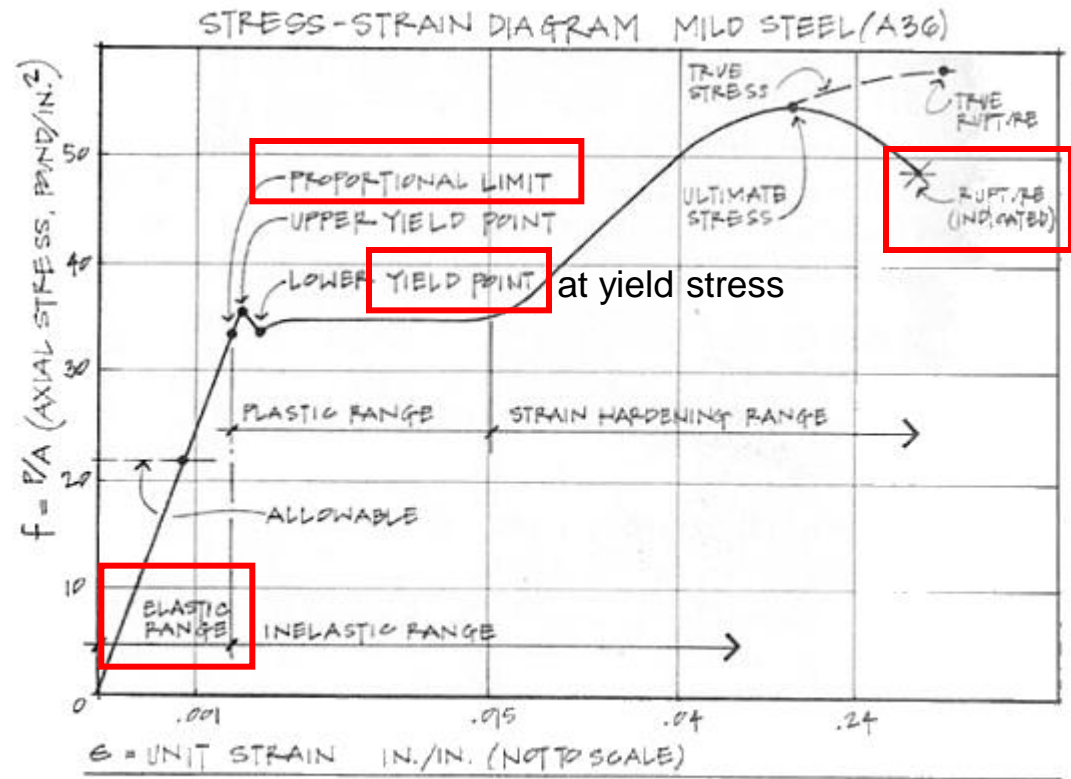


Figure 5.22 Stress-strain diagram for mild steel (A36) with key points highlighted.

Lateral Strain


- or “what happens to the cross section with axial stress”

$$\varepsilon_x = \frac{f_x}{E}$$

$$f_y = f_z = 0$$

- strain in lateral direction
 - negative
 - equal for isotropic materials

$$\varepsilon_y = \varepsilon_z$$

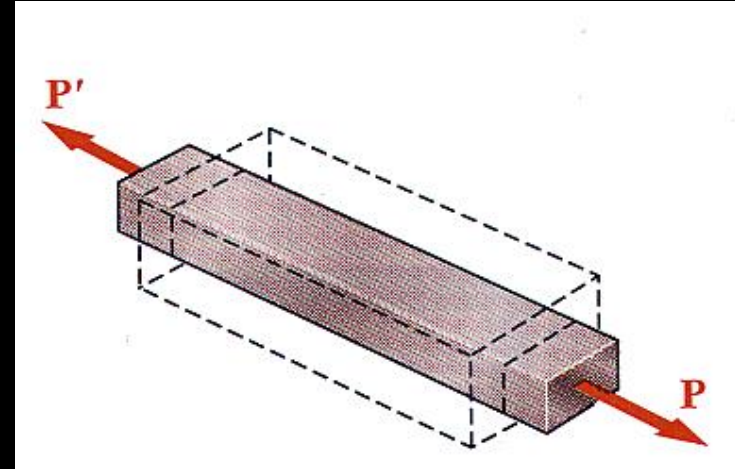


Poisson's Ratio

- constant relationship between longitudinal strain and lateral strain

$$\mu = -\frac{\text{lateral strain}}{\text{axial strain}} = -\frac{\varepsilon_y}{\varepsilon_x} = -\frac{\varepsilon_z}{\varepsilon_x}$$

$$\varepsilon_y = \varepsilon_z = -\frac{\mu f_x}{E}$$

- sign! $0 < \mu < 0.5$

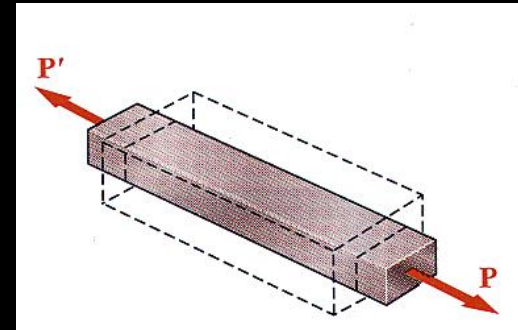

Calculating Strain


- from Hooke's law

$$f = E \cdot \varepsilon$$

- substitute



$$\frac{P}{A} = E \cdot \frac{\delta}{L}$$

- get \Rightarrow
- $$\delta = \frac{PL}{AE}$$

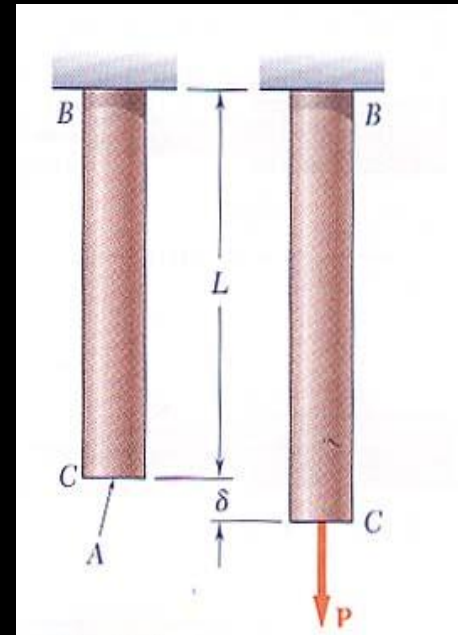


Orthotropic Materials

- *non-isometric*
- *directional values of E and μ*
- *ex:*
 - *plywood*
 - *laminates*
 - *polymer composites*

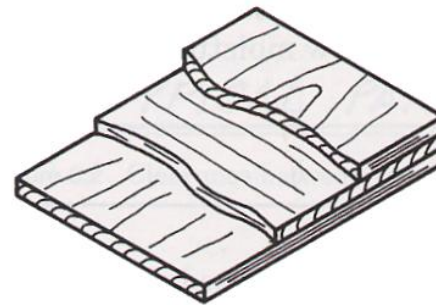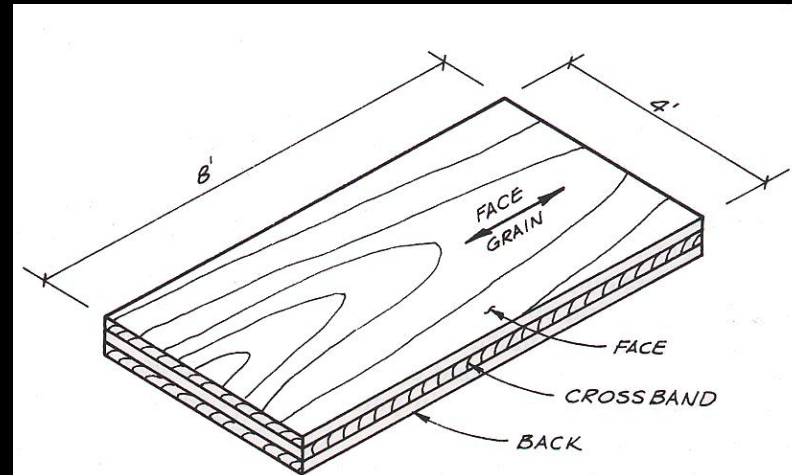



3 LAYER
3 PLY CONSTRUCTION

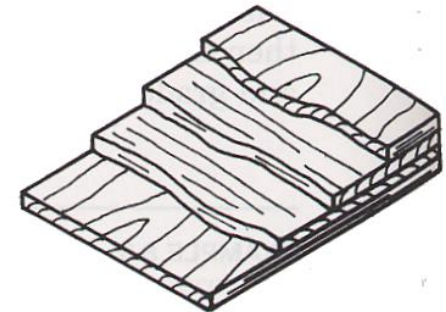

3 LAYER
4 PLY CONSTRUCTION


Stress Concentrations

- why we use f_{ave}
- increase in stress at changes in geometry
 - sharp notches
 - holes
 - corners

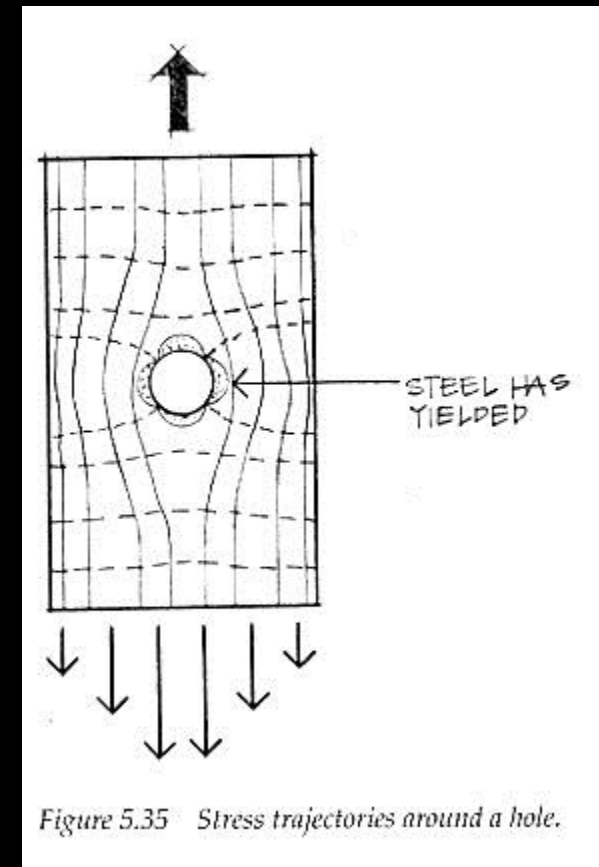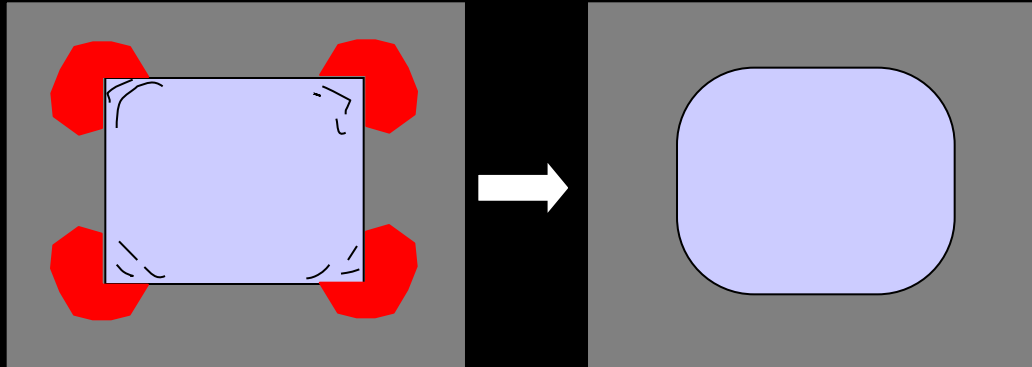

Maximum Stresses

- if we need to know where max f and f_v happen:

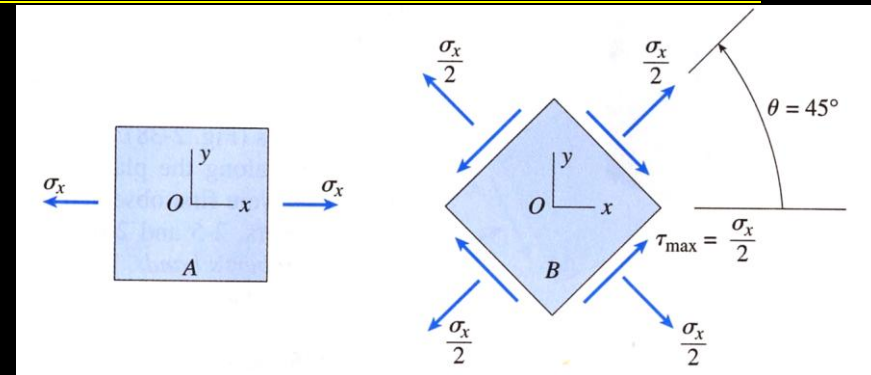

$$\theta = 0^\circ \rightarrow \cos \theta = 1 \quad f_{\max} = \frac{P}{A_o}$$

$$\theta = 45^\circ \rightarrow \cos \theta = \sin \theta = \sqrt{0.5}$$

$$f_{v-\max} = \frac{P}{2A_o} = \frac{f_{\max}}{2}$$

Maximum Stresses





FIG. 2-37 Shear failure along a 45° plane of a wood block loaded in compression



FIG. 2-38 Slip bands (or Lüders' bands) in a polished steel specimen loaded in tension

Deformation Relationships



- *physical movement*
 - axially (same or zero)
 - rotations from axial changes

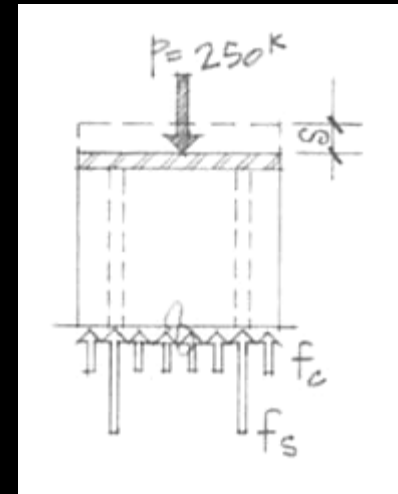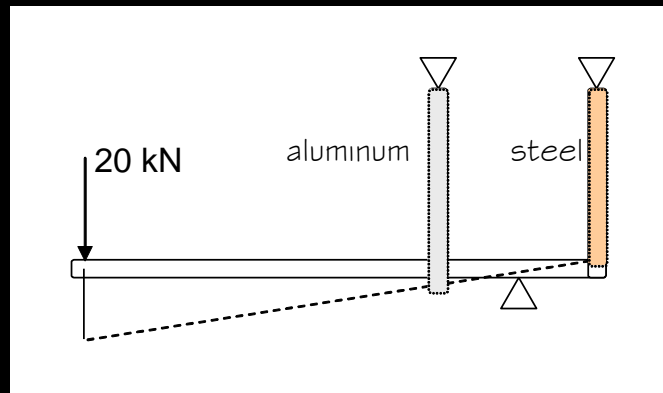

- $\delta = \frac{PL}{AE}$ relates δ to P

Deformations from Temperature

- *atomic chemistry reacts to changes in energy*
- *solid materials*
 - *can contract with decrease in temperature*
 - *can expand with increase in temperature*
- *linear change can be measured per degree*

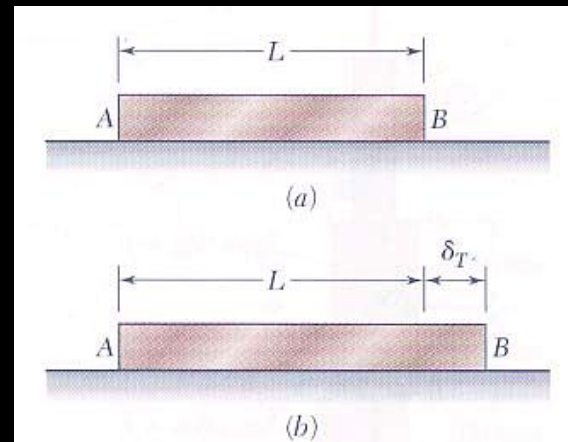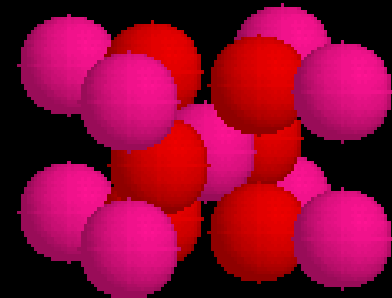

Thermal Deformation

- α - the rate of strain per degree

- UNITS : $/^{\circ}\text{F}$, $/^{\circ}\text{C}$


- length change: $\delta_T = \alpha(\Delta T)L$

- thermal strain: $\varepsilon_T = \alpha(\Delta T)$

– no stress when movement allowed

Coefficients of Thermal Expansion

Material	Coefficients (α) [in./in./°F]
Wood	3.0×10^{-6}
Glass	4.4×10^{-6}
Concrete	5.5×10^{-6}
Cast Iron	5.9×10^{-6}
Steel	6.5×10^{-6}
Wrought Iron	6.7×10^{-6}
Copper	9.3×10^{-6}
Bronze	10.1×10^{-6}
Brass	10.4×10^{-6}
Aluminum	12.8×10^{-6}

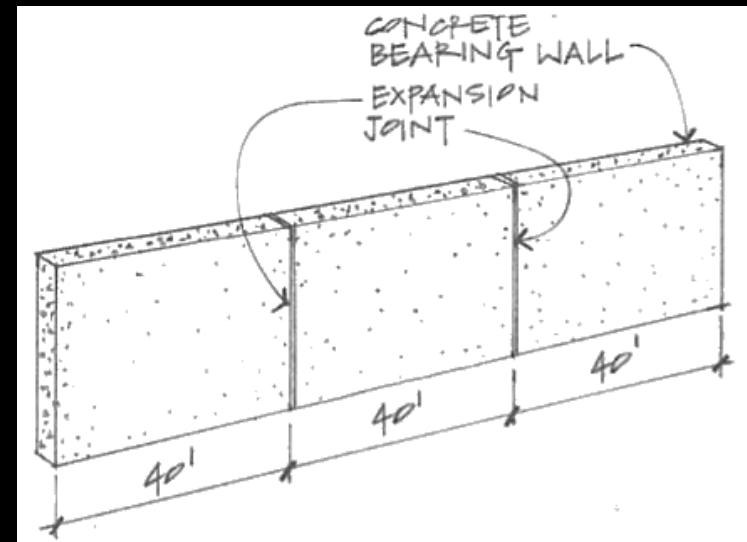

Stresses and Thermal Strains


- if thermal movement is restrained stresses are induced

1. bar pushes on supports

2. support pushes back



3. reaction causes internal stress

$$f = \frac{P}{A} = \frac{\delta}{L} E$$

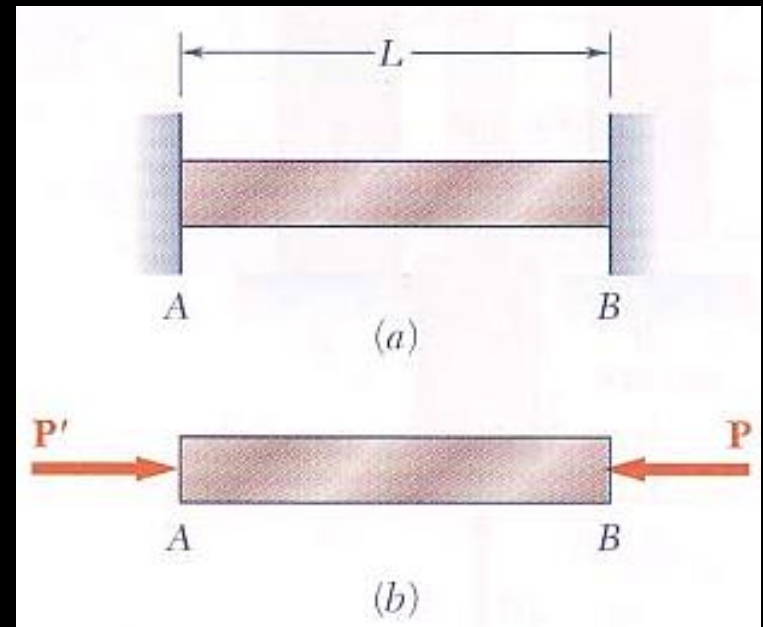

Superposition Method

- can remove a support to make it look determinate
- replace the support with a reaction
- enforce the geometry constraint

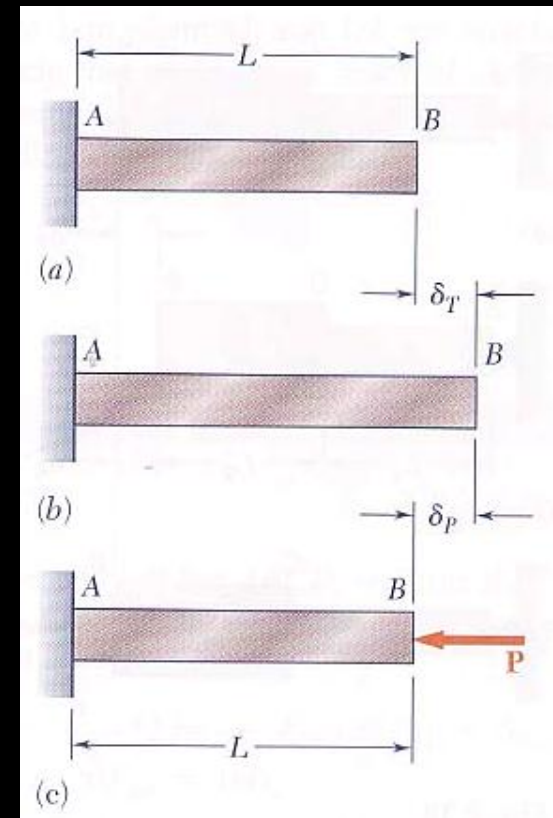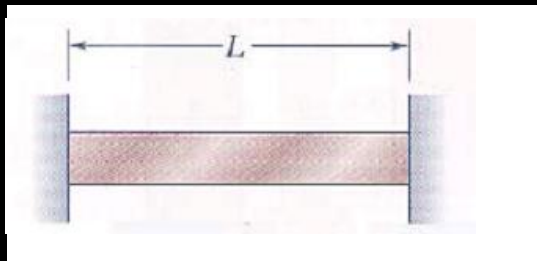

Superposition Method



- total length change restrained to zero

$$\text{constraint: } \delta_P + \delta_T = 0$$

$$\delta_P = -\frac{PL}{AE} \quad \delta_T = \alpha(\Delta T)L$$

$$\text{sub: } -\frac{PL}{AE} + \alpha(\Delta T)L = 0$$

$$f = -\frac{P}{A} = -\alpha(\Delta T)E$$

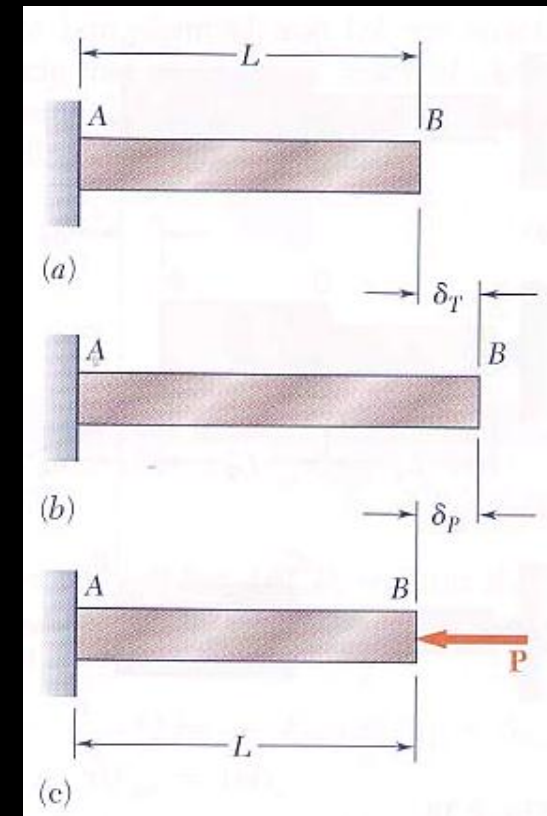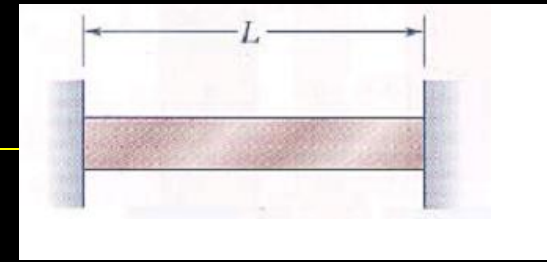

Dynamics

- *kinematics*

- *time, velocity, acceleration*

- *linear motion* $s(t) = v(0)t + \frac{1}{2}at^2$

- *angular rotation*


- *kinetics*

- *forces causing motion*

$$W = m \cdot g$$

- *work*


- *conservation of energy*

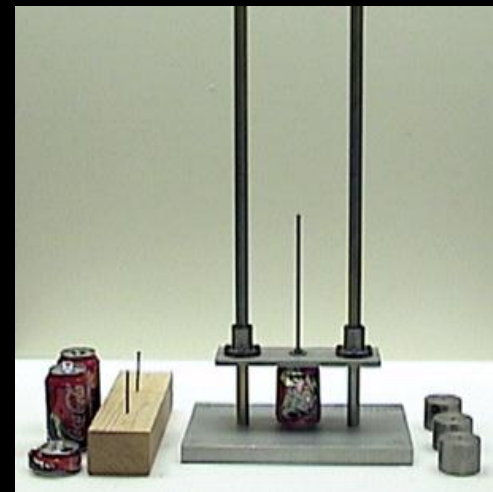

Dynamic Response



Statue in front of the cathedral of Palermo, Sicily

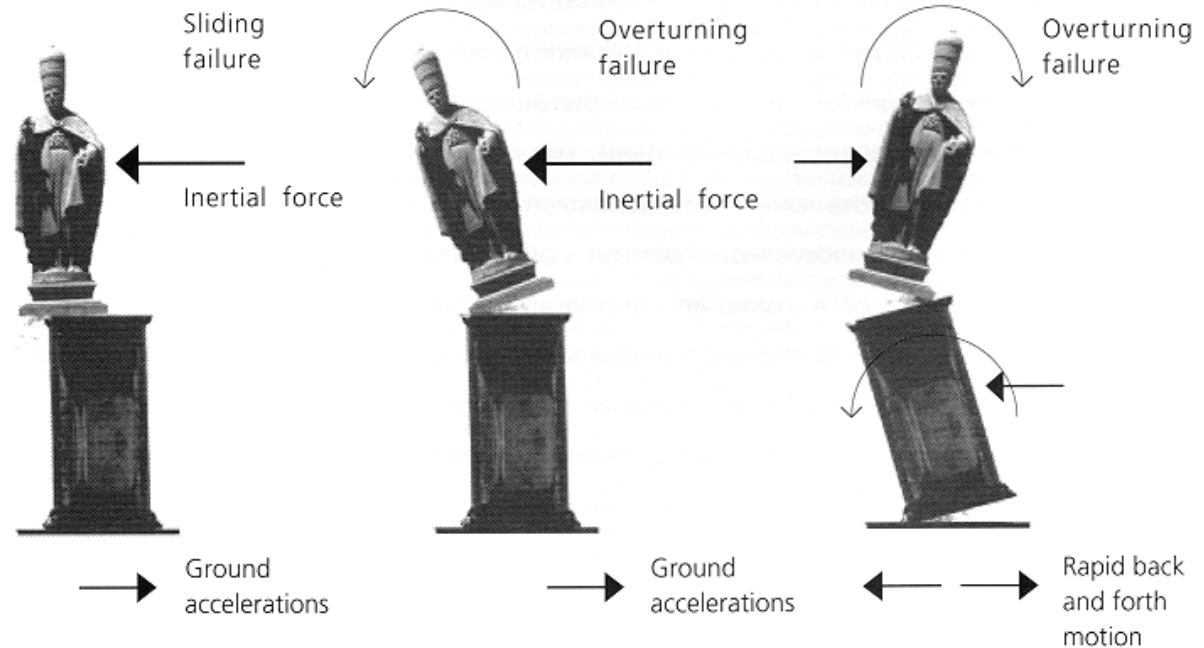



Lateral ground motions associated with earthquakes cause inertial forces to develop that are dependent on the weight of the structure. Sliding failures can occur.

The lateral ground motions can also cause a sculpture to overturn. The magnitude of the overturning effect depends on the weight of the sculpture and its height above the ground.

Back and forth ground motions can cause different parts of the sculpture to move in different directions. Overturning or cracking of elements can consequently occur.


Dynamic Response

- *period of vibration or frequency*
 - wave
 - sway/time period
- *damping*
 - reduction in sway
- *resonance*
 - amplification of sway

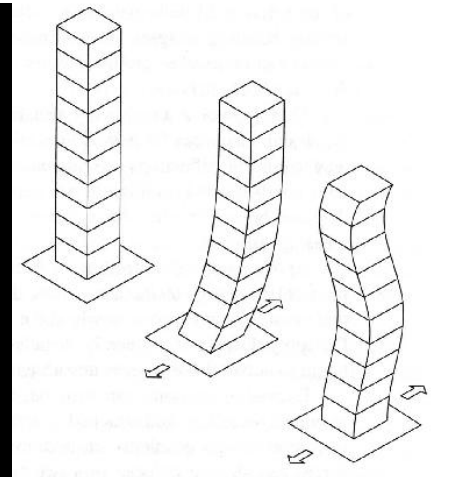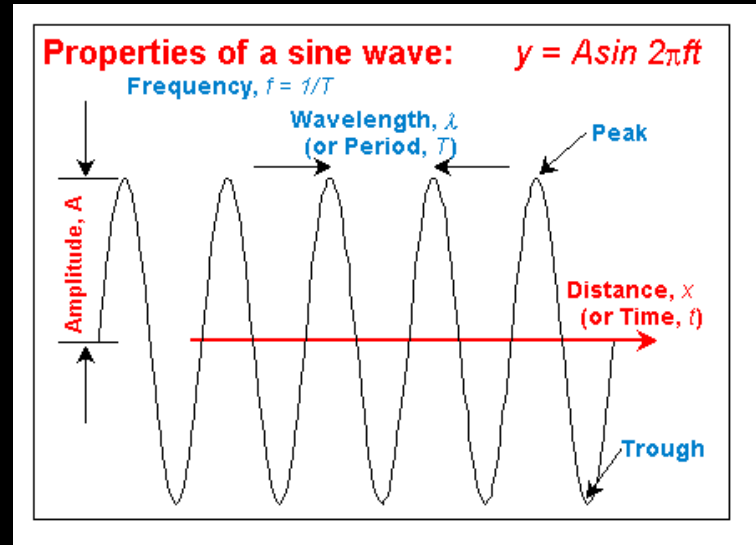


Frequency and Period

- *natural period of vibration*

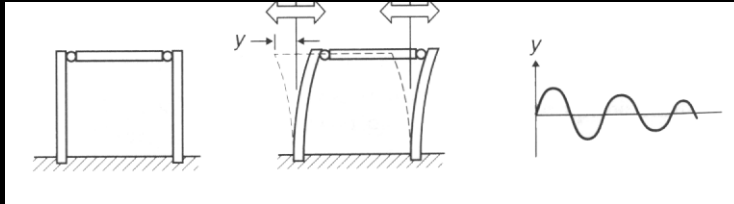


- *avoid resonance*
- *hard to predict seismic period*
- *affected by soil*
- *short period*
 - *high stiffness*
- *long period*
 - *low stiffness*

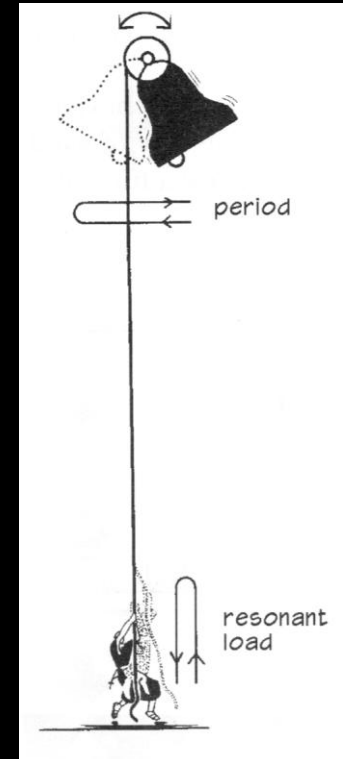

“To ring the bell, the sexton must pull on the downswing of the bell in time with the natural frequency of the bell.”

Design of Members

- *beyond allowable stress...*
- *materials aren't uniform 100% of the time*
 - *ultimate strength or capacity to failure may be different and some strengths hard to test for*
- **RISK & UNCERTAINTY**

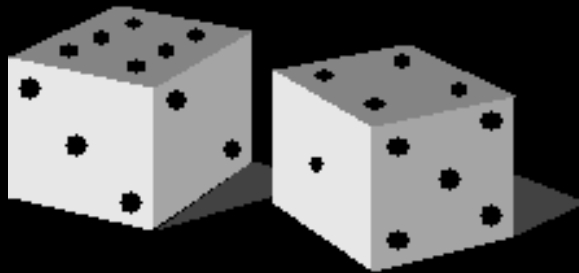

$$f_u = \frac{P_u}{A}$$

Factor of Safety

- *accommodate uncertainty with a safety factor:*


$$\text{allowable load} = \frac{\text{ultimate load}}{F.S}$$

- *with linear relation between load and stress:*

$$F.S = \frac{\text{ultimate load}}{\text{allowable load}} = \frac{\text{ultimate stress}}{\text{allowable stress}}$$

Load and Resistance Factor Design

- *loads on structures are*
 - *not constant*
 - *can be more influential on failure*
 - *happen more or less often*
 - **UNCERTAINTY**

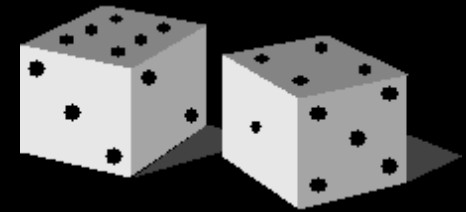

$$R_u = \gamma_D R_D + \gamma_L R_L \leq \phi R_n$$

ϕ - *resistance factor*

γ - *load factor for (D)ead & (L)ive load*