ELEMENTS OF ARCHITECTURAL STRUCTURES:
FORM, BEHAVIOR, AND DESIGN
ARCH 614
DR. ANNE NICHOLS
SPRING 2013

lecture
twelve



design methods, structural codes

Design

- factors out of the designer's control
  - loads
  - occurrence
- factors within the designer's control
  - choice of material
  - "cost" of failure (F.S., probability, location)
  - economic design method
  - analysis method

Design Methods

- different approaches to meeting strength/safety requirements
  - allowable stress design (elastic)
  - ultimate strength design
  - limit state design
  - plastic design
  - load and resistance factor design
- assume a behavior at failure or other threshold and include a margin of safety

Load Types

- D = dead load
- L = live load
- L_r = live roof load
- W = wind load
- S = snow load
- E = earthquake load
- R = rainwater load or ice water load
- T = effect of material & temperature
- H = hydraulic loads from soil (F from fluids)



Figure 1.13 Wind loads on a structure.

Weight of Materials

- *for a volume*
  - $W = \gamma V$ *where* γ *is weight/volume*
  - $W = \gamma t A$ *for an extruded area with height of t*

LOAD SOURCES 153

TABLE 4.1 Weight of Building Construction

	psf[a]	kPa[a]
Roofs		
3-ply ready roofing (roll, composition)	1	0.05
3-ply felt and gravel	5.5	0.26
5-ply felt and gravel	6.5	0.31
Shingles: Wood	2	0.10
Asphalt	2–3	0.10–0.15
Clay tile	9–12	0.43–0.58
Concrete tile	6–10	0.29–0.48
Slate, 3 in.	10	0.48



Building Codes

- *documentation*
  - *laws that deal with planning, design, construction, and use of buildings*
  - *regulate building construction for*
    - *fire, structural and health safety*
  - *cover <u>all</u> aspect of building design*
  - *references standards*
    - *acceptable minimum criteria*
    - *material & <u>structural</u> codes*

Building Codes

- *occupancy*
- *construction types*
- *structural chapters*
  - *loads, tests, foundations*
- *structural materials, assemblies*
  - *roofs*
  - *concrete*
  - *masonry*
  - *steel*

OCCUPANCY OR USE	UNIFORM (psf)	CONCENTRATED (lbs.)
1. Apartments (see residential)	—	—
2. Access floor systems		
Office use	50	2,000
Computer use	100	2,000
3. Armories and drill rooms	150	—
4. Assembly areas and theaters		
Fixed seats (fastened to floor)	60	
Lobbies	100	
Movable seats	100	—
Stages and platforms	125	
Follow spot, projections and control rooms	50	
Catwalks	40	

Prescribed Loads

- *ASCE-7*
  - *live load (not roof) reductions allowed*
- *International Building Code*
  - *occupancy*
  - *wind: pressure to static load*
  - *seismic: shear load function of mass and response to acceleration*
  - *fire resistance*



Figure 1.14 Earthquake loads on a structure.

Code Reduction of Live Loads

- for (ordinary) live loads
  - factored area supported ≥ 400 ft^2
  - reduction can't exceed
    - $0.5L_o$ (one floor) or $0.4L_o$ (more)

$$L = L_o\left(0.25 + \frac{15}{\sqrt{K_{LL}A_T}}\right)$$

TABLE 1607.10.1
LIVE LOAD ELEMENT FACTOR, K_{LL}

ELEMENT	K_{LL}
Interior columns	4
Exterior columns without cantilever slabs	4
Edge columns with cantilever slabs	3
Corner columns with cantilever slabs	2
Edge beams without cantilever slabs	2
Interior beams	2
All other members not identified above including: Edge beams with cantilever slabs Cantilever beams One-way slabs Two-way slabs Members without provisions for continuous shear transfer normal to their span	1

- for live loads > 100 lb/ft^2
  - live load reduction of 20% on columns
- for (ordinary) roofs: $L_r = L_o R_1 R_2$
  - 12 lb/ft^2 $\leq L_r \leq$ 20 lb/ft^2

Structural Codes

- prescribe loads and combinations
- prescribe design method
- prescribe stress and deflection limits
- backed by the profession
- may require design to meet performance standards
- related to material or function

Structural Codes

- Design Codes
  - Wood
    - NDS
  - Steel
    - AISC
  - Concrete
    - ACI
    - AASHTO
  - Masonry
    - MSJC



Design Methods

- probability of loads and resistance
- material variability



- overload, fracture, fatigue, failure
- allowable stress design

$$f_{actual} = \frac{P}{A} \leq f_{allowed} = \frac{f_{capacity}}{F.S.}$$

- limit state design
  - design loads & capacities

Allowable Stress Design

- *historical method*
- *a.k.a. working stress, strength design*
- *stresses stay in ELASTIC range*

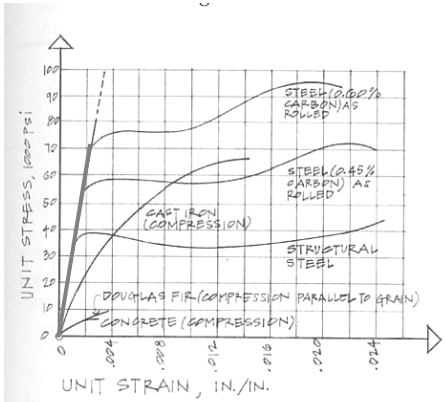

Figure 5.20 Stress-strain diagram for various materials.

ASD Load Combinations

ASCE-7 (2010)

- *D*
- *D + L*
- *D + (L_r or S or R)*
- *D + 0.75L + 0.75(L_r or S or R)*
- *D + (0.6W or 0.7E)*
- *D + 0.75L + 0.75(0.6W or 0.7E) + (0.75L_r or S or R)*
- *0.6D + (0.6W or 0.7E)*

Limit State Design

- *a.k.a. strength design*
- *stresses go to limit (strain outside elastic range)*
- *loads may be factored*
- *resistance or capacity reduced by a factor*
- *based on material behavior*
- *"state of the art"*

Limit State Design

- *load and resistance factor design (LRFD)*
  - *loads:*
    - *not constant,*
    - *possibly more influential on failure*
    - *happen more or less often*
  - *UNCERTAINTY*

$$\gamma_D P_D + \gamma_L P_L \leq \phi P_u$$

ϕ *- Resistance factor*

γ *- Load factor for (D)ead & (L)ive load*

LRFD Load Combinations

ASCE-7 (2010)

- *1.4D*
- *1.2D + 1.6L + 0.5(L_r or S or R)*
- *1.2D + 1.6(L_r or S or R) + (L or 0.5W)*
- *1.2D + 1.0W + L + 0.5(L_r or S or R)*
- *1.2D + 1.0E + L + 0.2S*
- *0.9D + 1.0W*
- *0.9D + 1.0E*
  - *F has same factor as D in 1-5 and 7*
  - *H adds with 1.6 and resists with 0.9 (permanent)*

Load Tracing

- *how loads are transferred*
  - *usually starts at top*
  - *distributed by supports as actions*
  - *distributed by tributary areas*

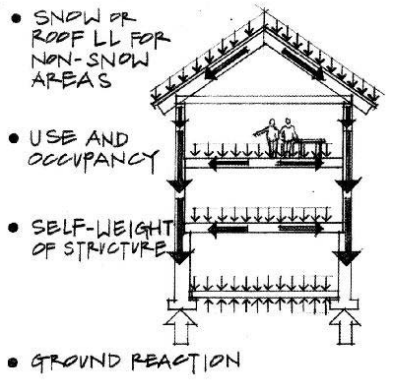

Load Tracing

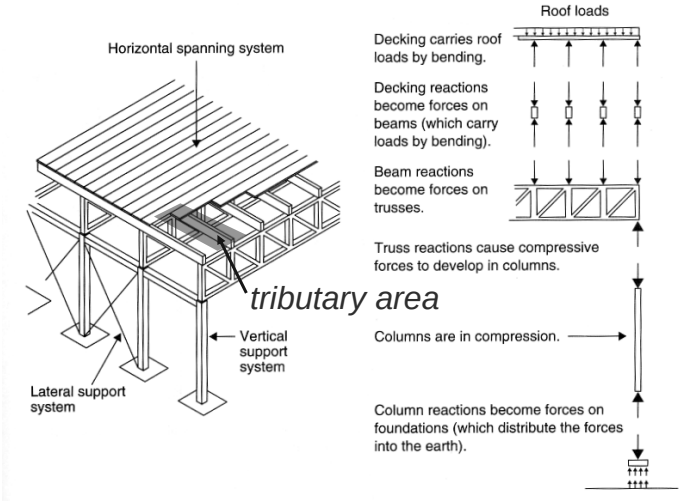

Load Tracing

- *tributary load*
  - *think of water flow*
  - *"concentrates" load of area into center*

$$w = \left(\frac{load}{area}\right) \times (tributary\ width)$$



Load Paths



(a) FBD—decking.



(b) FBD—joists.



(c) FBD—beams.



(d) FBD—girder.

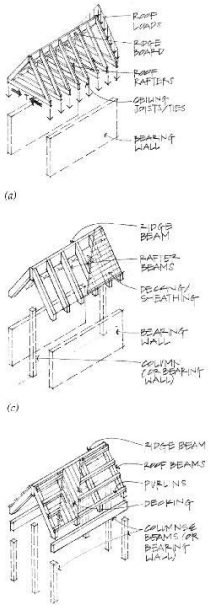

Load Paths

- *wall systems*



Figure 4.12 Uniform wall load from a slab.



Figure 4.13 Uniform wall load from rafters and joists.



Figure 4.14 Concentrated loads from widely spaced beams.

Load Paths

- *openings & pilasters*



Figure 4.15 Arching over wall openings.



Figure 4.16 Stud wall with a window opening.



Figure 4.17 Pilasters supporting concentrated beam loads.

Load Paths

- *foundations*



Figure 4.24 Spread footing.



Figure 4.25 Wall footing.



Figure 4.26 Mat or raft foundation.

Load Paths

- *deep foundations*



Figure 4.27 Pile foundations.



Figure 4.28 Pile cap on one pile group.



Figure 4.29 Grade beam supporting a bearing wall.