


lecture  
thirteen



# wood construction: materials & beams

## Timber

- *lightweight : strength ~ like steel*
- *strengths vary*
  - by wood type
  - by direction
  - by “flaws”
- *size varies by tree growth*
- *renewable resource*
- *manufactured wood*
  - *assembles pieces*
  - *adhesives*

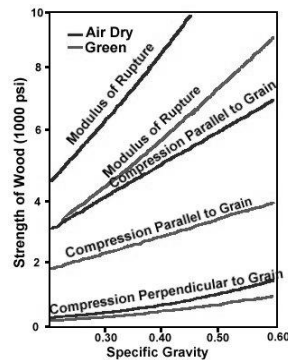

## Wood Beam Design


- *National Design Specification*
  - National Forest Products Association
  - ASD & LRFD
  - *adjustment factors x tabulated stress = allowable stress*
  - *adjustment factors terms, C with subscript*
  - *i.e, bending:*



$$f_b \leq F'_b = F_b \times (\text{product of adjustment factors})$$

## Wood Properties

- *cell structure and density*

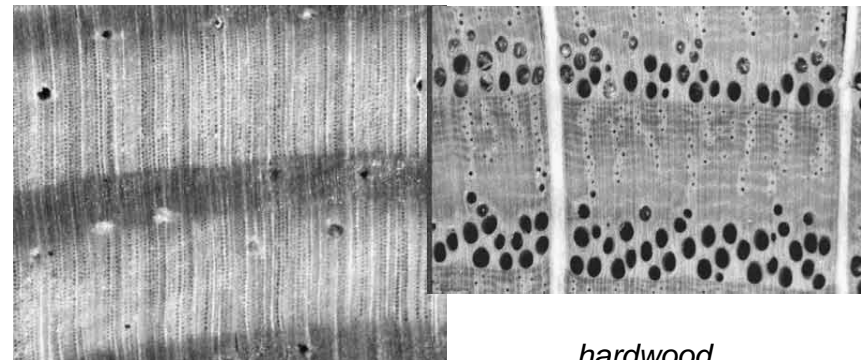


softwood

hardwood

# Wood Properties

- moisture
  - exchanges with air easily
  - excessive drying causes warping and shrinkage
  - strength varies some
- temperature
  - steam
  - volatile products
  - combustion

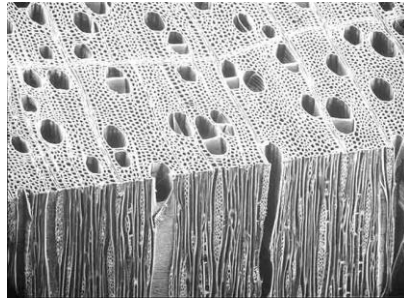

<http://www.swst.org/teach/se2/struct1.html>

# Wood Properties

- load duration
  - short duration
    - higher loads
  - normal duration
    - > 10 years
- creep
  - additional deformation with no additional load



ArchitectureWeek.com

# Structural Lumber

- dimension – 2 x's (nominal)
- beams, posts, timber, planks
- grading
  - select structural
  - no. 1, 2, & 3
- tabular values by species
- glu-lam
- plywood



Species and commercial grade	Size classification	Design values in pounds per square inch				
		Extreme fiber in bending "F <sub>b</sub> "		Tension parallel to grain "F <sub>t</sub> "	Horizontal shear "F <sub>v</sub> "	Compression perpendicular to grain "F <sub>c⊥</sub> "
		Single-member uses	Repetitive-member uses			
<b>SOUTHERN PINE</b> (Surfaced dry. Used at 19% max. m.c.)						
Select Structural		2000	2300	1150	100	565
Dense Select Structural		2300	2700	1350	100	690
No. 1		1700	1950	1000	100	585
No. 1 Dense	2" to 4" thick	2000	2300	1150	100	690
No. 2	2" to 4" wide	1400	1650	825	90	565
No. 2 Dense		1650	1900	975	90	690
No. 3		775	900	450	90	565
No. 3 Dense		925	1050	525	90	690
Stud		775	900	450	90	565
Construction Standard	2" to 4" thick	1000	1150	600	100	565
Utility	4" wide	575	675	350	90	565
Select Structural		275	300	150	90	565
Select Structural		1750	2000	1100	90	565

# Adjustment Factors

- terms
  - C<sub>D</sub> = load duration factor
  - C<sub>M</sub> = wet service factor
    - 1.0 dry ≤ 16% MC
  - C<sub>F</sub> = size factor
    - visually graded sawn lumber and round timber > 12" depth

$$C_F = (12 / d)^{1/9} \leq 1.0$$




Figure 4.13 Madison curve.

Table 5.2 (pg 177)

## Adjustment Factors

- *terms*
  - $C_{fu}$  = flat use factor
    - not decking
  - $C_i$  = incising factor
    - increase depth for pressure treatment
  - $C_t$  = temperature factor
    - lose strength at high temperatures

Wood Beams 9  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Adjustment Factors

- *terms*
  - $C_r$  = repetitive member factor
  - $C_H$  = shear stress factor
    - splitting
  - $C_V$  = volume factor
    - same as  $C_F$  for glue laminated timber
  - $C_L$  = beam stability factor
    - beams without full lateral support
  - $C_C$  = curvature factor for laminated arches

Wood Beams 10  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Allowable Stresses

- *design values*
  - $F_b$ : bending stress
  - $F_t$ : tensile stress strong
  - $F_v$ : horizontal shear stress weak
  - $F_{c\perp}$ : compression stress (perpendicular to grain)
  - $F_c$ : compression stress (parallel to grain) strong
  - $E$ : modulus of elasticity
  - $F_p$ : bearing stress (parallel to grain)



Wood Beams 11  
Lecture 13

Elements of Architectural Structures  
ARCH 614

## Load Combinations

- *design loads, take the bigger of*
  - (dead loads)/0.9
  - (dead loads + any possible combination of live loads)/ $C_D$
- *deflection limits*
  - no load factors
  - for stiffer members:
    - $\Delta_T$  max from LL + 0.5(DL)



Wood Beams 12  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

# Beam Design Criteria

- strength design
  - bending stresses predominate
  - shear stresses occur
- serviceability
  - limit deflection and cracking
  - control noise & vibration
  - no excessive settlement of foundations
  - durability
  - appearance
  - component damage
  - ponding



Wood Beams 13  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2009abn

# Deflection Limits

- based on service condition, severity

Use	LL only	DL+LL
Roof beams:		
Industrial	L/180	L/120
Commercial		
plaster ceiling	L/240	L/180
no plaster	L/360	L/240
Floor beams:		
Ordinary Usage	L/360	L/240
Roof or floor (damageable elements)		L/480

Wood Beams 14  
Lecture 13


Elements of Architectural Structures  
ARCH 614

S2007abn

# Beam Design Criteria


- superpositioning
  - use of beam charts
  - elastic range only!
  - “add” moment diagrams
  - “add” deflection CURVES (not maximums)

## 1. SIMPLE BEAM—UNIFORMLY DISTRIBUTED LOAD

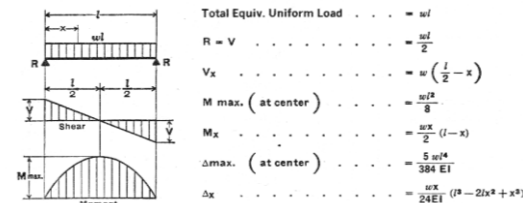



Wood Beams 14  
Lecture 13

Elements of Architectural Structures  
ARCH 614

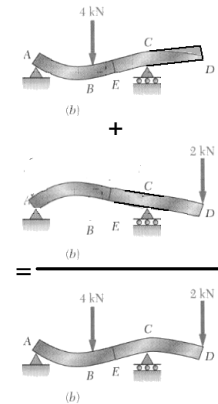

# Lateral Buckling

- lateral buckling caused by compressive forces at top coupled with insufficient rigidity
- can occur at low stress levels
- stiffen, brace or bigger  $I_y$



Wood Beams 15  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Design Procedure

1. Know  $F_{all}$  for the material or  $F_U$  for LRFD

2. Draw  $V$  &  $M$ , finding  $M_{max}$



3. Calculate  $S_{req'd}$  ( $f_b \leq F_b$ )

$$S = \frac{bh^2}{6}$$

4. Determine section size

Wood Beams 16  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Beam Design

6. Evaluate shear stresses - horizontal

- ( $f_v \leq F_v$ )

- $W$  and rectangles  $f_{v-max} = \frac{3V}{2A} \approx \frac{V}{A_{web}}$

- general  $f_{v-max} = \frac{VQ}{Ib}$

Wood Beams 18  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Beam Design

4\*. Include self weight for  $M_{max}$   
– and repeat 3 & 4 if necessary

5. Consider lateral stability

Unbraced roof trusses were blown down in 1999 at this project in Moscow, Idaho.

Photo: Ken Carper



Wood Beams 17  
Lecture 13


Elements of Architectural Structures  
ARCH 614

S2007abn

## Beam Design

7. Provide adequate bearing area at supports

$$f_p = \frac{P}{A} \leq F_p$$

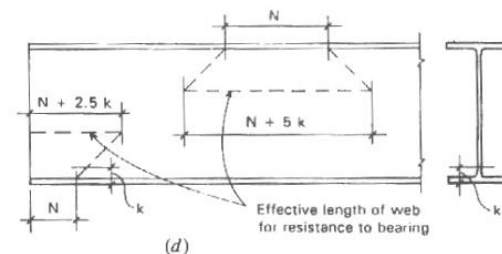

Wood Beams 19  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

# Beam Design

## 8. Evaluate torsion

$$(f_v \leq F_v)$$

- circular cross section

$$f_v = \frac{T\rho}{J}$$

- rectangular

$$f_v = \frac{T}{c_1 ab^2}$$






TABLE 3.1. Coefficients for Rectangular Bars in Torsion

a/b	c <sub>1</sub>	c <sub>2</sub>
1.0	0.208	0.1406
1.2	0.219	0.1661
1.5	0.231	0.1958
2.0	0.246	0.229
2.5	0.258	0.249
3.0	0.267	0.263
4.0	0.282	0.281
5.0	0.291	0.291
10.0	0.312	0.312
∞	0.333	0.333

# Beam Design

## 9. Evaluate deflections

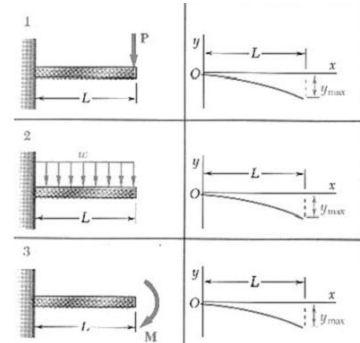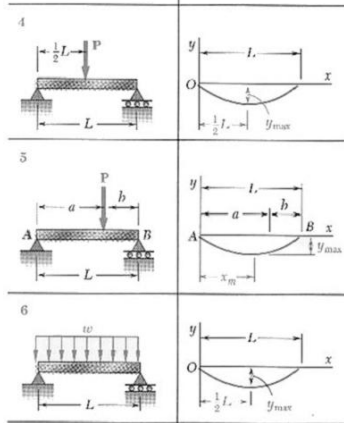


$$y_{max}(x) = \Delta_{actual} \leq \Delta_{allowable}$$

# Joists & Rafters

- allowable load tables
- allowable length tables for common live & dead loads
- lateral bracing needed
- common spacings


TABLE 5.5 Allowable Spans in Feet and Inches for Floor Joists

Joist Size (in)	Maximum of Dead Load, D, in 100,000 psi		
	1.3	1.4	1.5
x 25.4 for mm			
2	12.0	10.4	10.3
x 6	16.0	9.1	9.4
6	19.2	8.7	8.9
24.0	7.11	8.2	8.4
2	12.0	13.2	13.6
x 8	16.0	12.4	12.3
8	19.2	11.5	11.7
24.0	10.6	10.9	11.0
2	12.0	16.10	17.3
x 10	16.0	15.3	15.8
10	19.2	14.5	14.9
24.0	13.4	13.8	14.0
2	12.0	20.6	21.0
x 12	16.0	18.7	19.1
12	19.2	17.4	17.1
24.0	16.3	16.8	17.0
2	12.0	9.93	1.043
x 16	16.0	1.093	1.148
16	19.2	1.161	1.220
24.0	1.251	1.314	1.376



# Engineered Wood

- plywood
  - veneers at different orientations
  - glued together
  - split resistant
  - higher and uniform strength
  - limited shrinkage and swelling
  - used for sheathing, decking, shear walls, diaphragms

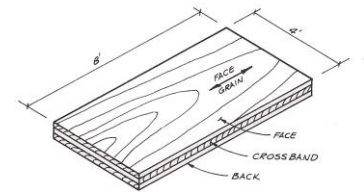

## Engineered Wood

- *glued-laminated timber*
  - *glulam*
  - *short pieces glued together*
  - *straight or curved*
  - *grain direction parallel*
  - *higher strength*
  - *more expensive than sawn timber*
  - *large members (up to 100 feet!)*
  - *flexible forms*




Wood Beams 24  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Engineered Wood

- *I sections*
  - *beams*
- *other products*
  - *pressed veneer strip panels (Parallam)*
- *wood fibers*
  - *Hardieboard: cement & wood*



Wood Beams 25  
Lecture 13

Elements of Architectural Structures  
ARCH 614


S2007abn

## Timber Elements

- *stressed-skin elements*
  - *modular built-up “plates”*
  - *typically used for floors or roofs*



Figure 1. Typical Two-Sided Stressed-Skin Panel

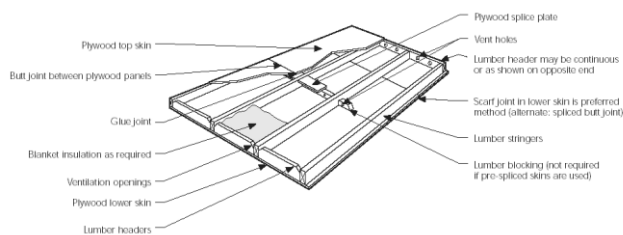



Wood Beams 26  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Timber Elements

- *built-up box sections*
  - *built-up beams*
  - *usually site-fabricated*
  - *bigger spans*

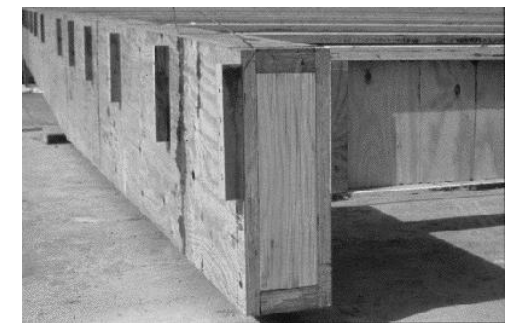

Wood Beams 27  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2007abn

## Timber Elements

- *trusses*
  - long spans
  - versatile
  - common in roofs



Wood Beams 28  
Lecture 13




Elements of Architectural Structures  
ARCH 614



S2007abn

## Timber Elements

- *folded plates and arch panels*
  - usually of plywood

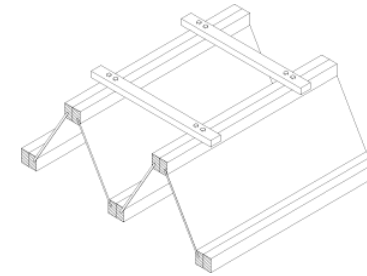

Wood Beams 30  
Lecture 13

Elements of Architectural Structures  
ARCH 614

S2009abn

## Timber Elements

- *arches and lamellas*
  - arches commonly laminated timber
  - long spans
  - usually only for roofs




Wood Beams 31  
Lecture 13



Elements of Architectural Structures  
ARCH 614

S2009abn

## Approximate Depths

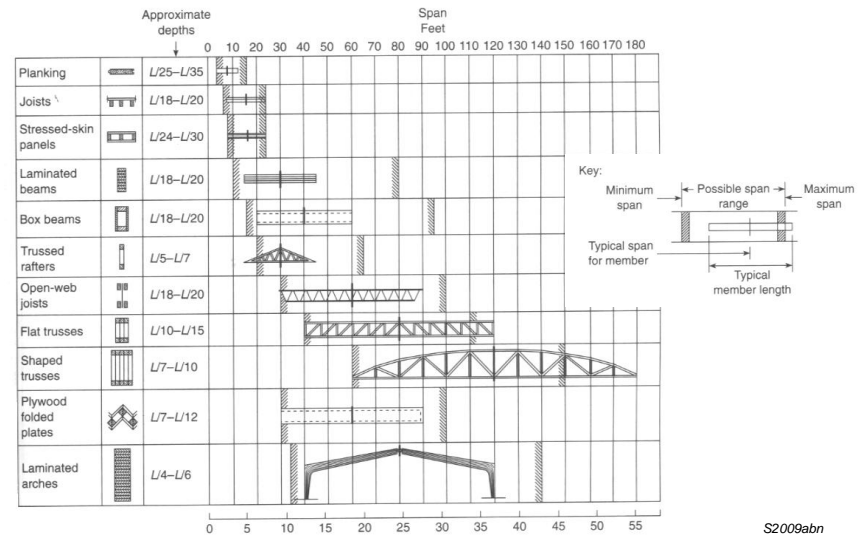

S2009abn