

ARCH 614. Assignment #5

Date: 2/18/14, due 2/25/14

Pass-fail work

Problems: all but 5A, 5B & 5C from Ambrose & Tripeny, Chapter 3, pgs 130, 138, and 156.

Note: Problems marked with a * have been altered with respect to the problem stated in the text.

(20%) **Problem 3.8.C.** Find the reactions and draw the complete shear and moment diagrams for the following continuous beam with two unequal spans and uniformly distributed loading, using the theorem of three moments.

First Span, ft	Second Span, ft	Load, lbs/ft
12	16	2000

(10%) **Problem 3.8.I. USE METRIC UNITS.** A 22-ft [6.71 m] span beam is fixed at both ends and carries a single concentrated load of 16 kips [71.2 kN] at midspan. Find the reactions and construct the complete shear and moment diagrams using beam diagram formulas.

(20%) 5A) USE US UNITS. Find the components of the reactions for the structure shown in Figure 3.48b. (pinned frames)

Partial answers to check with: $A_y = C_y = 2\text{ k}$, $A_x = 1.33\text{ k}$, $C_x = -1.33\text{ k}$, wrt AB: $B_x = -1.33\text{ k}$, $B_y = 0$.

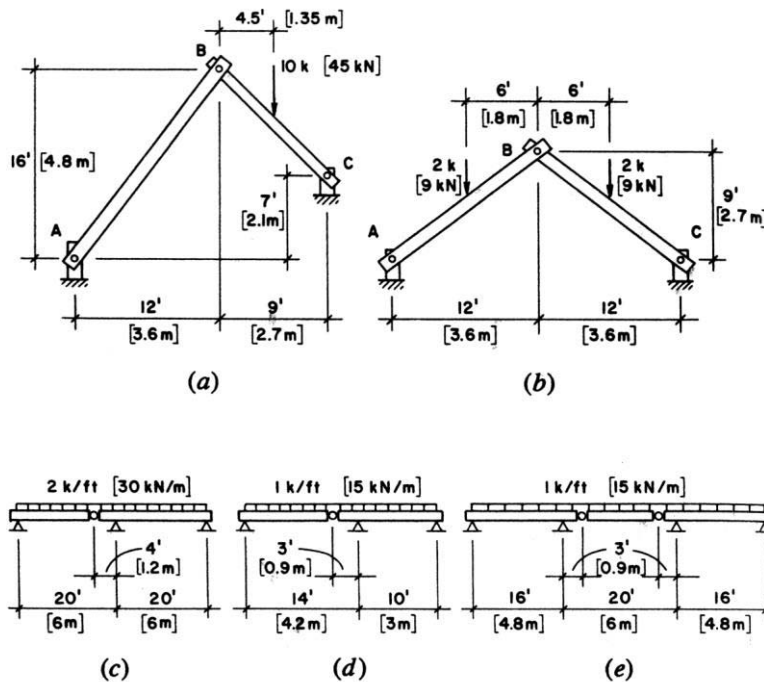


Figure 3.48 Reference for Problem 3.10.

MORE NEXT PAGE

(20%) 5B) USE METRIC UNITS. Investigate the beam shown in Figure 3.48c. Find the reactions and draw the shear and moment diagrams, indicating all critical values. (*pinned frames also known as compound statically determinate beams*)

Partial answers to check with: $R_1 = 72 \text{ kN}$, $R_2 = 216 \text{ kN}$, $V_{max} = 108 \text{ kN}$, $M_{max} = 108 \text{ kN-m}$.

(24%) **Problem 3.10.D.** Investigate the frame shown in Figure 3.46d for reactions and internal conditions, using the procedure shown for the preceding examples (which includes drawing the V and M diagrams along with a sketch of the deflected shape). *Note: The load direction is toward the side the uniform load symbol “touches”.*

Partial answers to check with: Left R = 0 k right & 4.5 k up, right R = 12 k left & 4.5 k down, $V_{max} = -12 \text{ k}$, $M_{max} = 72 \text{ k-ft}$.

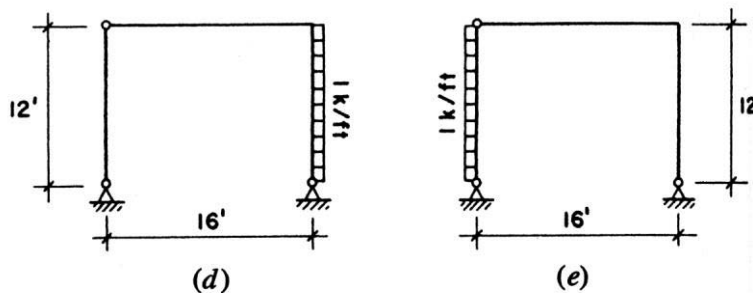


Figure 3.46 Reference for Problem 3.10, part 2.

(6%) 5C) For the frame of problem 3.10.D., use Multifram software to find the shear and bending moment values, and the deflected shape to verify your work, being careful to indicate there is a pinned joint at the top of the left column. Use the standard steel section you have been assigned which is posted in My Grades on e-Learning. Submit the data file (.mfd) on E-learning (under Contents-Assignments) and provide a print of the shear (V) diagram, bending moment (M) diagram, and deflected shape (δ). *Note: Multifram plots the V diagram with respect to what it thinks the direction from the first end to the other end is. And the “Find, Given, Solution” format is not required.* (*statically determinate frames*)