

lecture  
eighteen

steel construction:  
column design



Cor-Ten Steel Sculpture By Richard Serra  
Museum of Modern Art Fort Worth, TX  
(AISC - Steel Structures of the Everyday)

Steel Columns 1  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

Design Methods (revisited)

- know
  - loads or lengths
- select
  - section or load
  - adequate for strength and no buckling

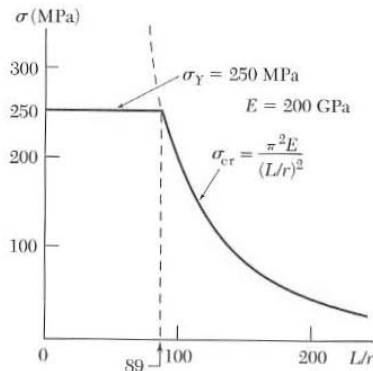


Fig. 10.9


Steel Columns 3  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

Structural Steel

- standard rolled shapes (W, C, L, T)
- tubing
- pipe
- built-up

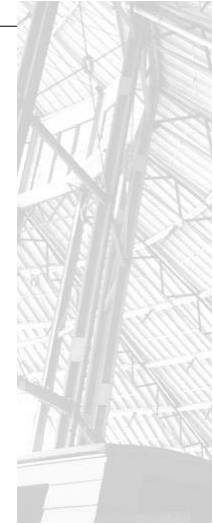

Steel Columns 2  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

Allowable Stress Design (ASD)

- AISC 9<sup>th</sup> ed

$$F_a = \frac{f_{critical}}{F.S.} = \frac{12\pi^2 E}{23 \left( \frac{Kl}{r} \right)^2}$$

- slenderness ratio  $\frac{Kl}{r}$

– for  $kl/r \geq C_c$  = 126.1 with  $F_y = 36$  ksi  
= 107.0 with  $F_y = 50$  ksi


Steel Columns 4  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## C<sub>c</sub> and Euler's Formula

- $Kl/r < C_c$ 
  - short and stubby
  - parabolic transition
- $Kl/r > C_c$ 
  - Euler's relationship
  - < 200 preferred

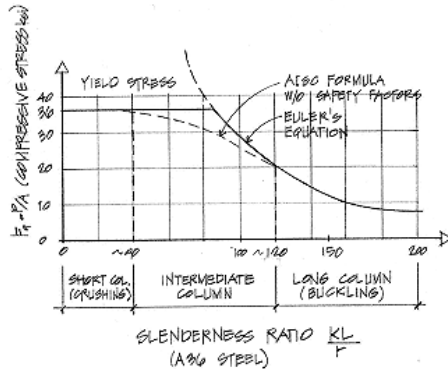


$$C_c = \sqrt{\frac{2\pi^2 E}{F_y}}$$

Steel Columns 5  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## C<sub>c</sub> and Euler's Formula

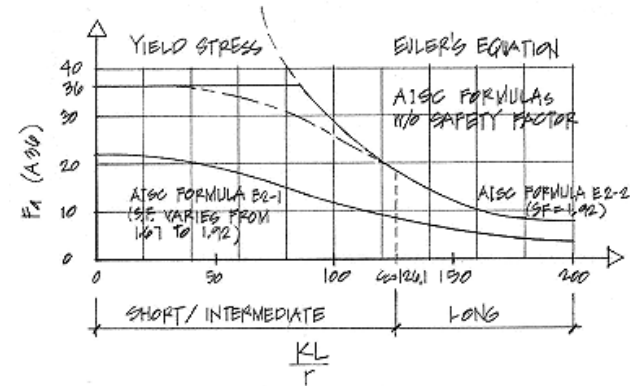

Steel Columns 6  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## Short / Intermediate

- $L_e/r < C_c$ 

$$F_a = \left[ 1 - \frac{(Kl/r)^2}{2C_c^2} \right] \frac{F_y}{F.S.}$$

– where

$$F.S. = \frac{5}{3} + \frac{3(Kl/r)}{8C_c} - \frac{(Kl/r)^3}{8C_c^3}$$

Steel Columns 7  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## Unified Design

- **limit states for failure**

$$P_a \leq \frac{P_n}{\Omega}$$

$$P_u \leq \phi_c P_n$$

$$\phi_c = 0.90 \quad P_n = F_{cr} A_g$$

1. **yielding**  $\frac{KL}{r} \leq 4.71 \sqrt{\frac{E}{F_y}}$  or  $F_e \geq 0.44F_y$
2. **buckling**  $\frac{KL}{r} > 4.71 \sqrt{\frac{E}{F_y}}$  or  $F_e < 0.44F_y$

$F_e$  – elastic buckling stress (Euler)

Steel Columns 8  
Lecture 18

Elements of Architectural Structures  
ARCH 614

F2011abn

## Unified Design

- $P_n = F_{cr} A_g$
- for  $\frac{KL}{r} \leq 4.71 \sqrt{\frac{E}{F_y}}$   $F_{cr} = \left[ 0.658 \frac{F_y}{F_e} \right] F_y$
- for  $\frac{KL}{r} > 4.71 \sqrt{\frac{E}{F_y}}$   $F_{cr} = 0.877 F_e$
- where  $F_e = \frac{\pi^2 E}{\left(\frac{KL}{r}\right)^2}$

## Procedure for Analysis

1. calculate  $KL/r$ 
  - biggest of  $KL/r$  with respect to x axes and y axis
2. find  $F_{cr}$  (see Note) from appropriate equation
  - tables are available Note: text uses  $F_c$   
and old  $\phi = 0.85$
3. compute  $P_n = F_{cr} A_g$
4. is  $P_a \leq P_n / \Omega$ ? or is  $P_u \leq \phi P_n$ ?
  - yes: ok
  - no: insufficient capacity and no good

## Procedure for Design

1. guess a size (pick a section)
2. calculate  $KL/r$ 
  - biggest of  $KL/r$  with respect to x axes and y axis
3. find  $F_a$  or  $F_{cr}$  (see Note) from appropriate equations
  - or find a chart Note: text uses  $F_c$   
and old  $\phi = 0.85$
4. compute  $P_n = F_{cr} A_g$

## Procedure for Design (cont'd)

5. is  $P_a \leq P_n / \Omega$ ? or is  $P_u \leq \phi P_n$ ?
  - yes: ok
  - no: pick a bigger section and **go back to step 2.**
6. check design efficiency
  - percentage of stress =  $\frac{P_r}{P_c} \cdot 100\%$
  - if between 90-100%: good
  - if < 90%: pick a smaller section and **go back to step 2.**

# Column Charts, $\phi F_{cr}$

Available Critical Stress,  $\phi F_{cr}$ , for Compression Members, ksi ( $F_y = 50$  ksi and  $\phi_c = 0.90$ )

KL/r	$\phi_c F_{cr}$	KL/r	$\phi_c F_{cr}$	KL/r	$\phi_c F_{cr}$	KL/r	$\phi_c F_{cr}$	KL/r	$\phi_c F_{cr}$
1	45.0	41	39.8	81	27.9	121	15.4	161	8.72
2	45.0	42	39.6	82	27.5	122	15.2	162	8.61
3	45.0	43	39.3	83	27.2	123	14.9	163	8.50
4	44.9	44	39.1	84	26.9	124	14.7	164	8.40
5	44.9	45	38.8	85	26.5	125	14.5	165	8.30
6	44.9	46	38.5	86	26.2	126	14.2	166	8.20
7	44.8	47	38.3	87	25.9	127	14.0	167	8.10
8	44.8	48	38.0	88	25.5	128	13.8	168	8.00
9	44.7	49	37.8	89	25.2	129	13.6	169	7.91
10	44.7	50	37.5	90	24.9	130	13.4	170	7.82
11	44.6	51	37.2	91	24.6	131	13.2	171	7.73
12	44.5	52	36.9	92	24.2	132	13.0	172	7.64
13	44.4	53	36.6	93	23.9	133	12.8	173	7.55
14	44.4	54	36.4	94	23.6	134	12.6	174	7.46
15	44.3	55	36.1	95	23.3	135	12.4	175	7.38
16	44.2	56	35.8	96	22.9	136	12.2	176	7.29
17	44.1	57	35.5	97	22.6	137	12.0	177	7.21
18	43.9	58	35.2	98	22.3	138	11.9	178	7.13
19	43.8	59	34.9	99	22.0	139	11.7	179	7.05
20	43.7	60	34.6	100	21.7	140	11.5	180	6.97
21	43.6	61	34.3	101	21.3	141	11.4	181	6.90
22	43.4	62	34.0	102	21.0	142	11.2	182	6.82
23	43.3	63	33.7	103	20.7	143	11.0	183	6.75
24	43.1	64	33.4	104	20.4	144	10.9	184	6.67
25	43.0	65	33.0	105	20.1	145	10.7	185	6.60


Steel Columns 11  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

# Column Charts

**Table 4-1 (continued)**  
**Available Strength in Axial Compression, kips**  
**W Shapes**



**W12**

$F_y = 50$  ksi

Shape	W12x										
	96		87		79		72		65		
Wt/ft	$P_n/\Omega_c$	$\phi_c P_n$	$P_n/\Omega_c$	$\phi_c P_n$	$P_n/\Omega_c$	$\phi_c P_n$	$P_n/\Omega_c$	$\phi_c P_n$	$P_n/\Omega_c$	$\phi_c P_n$	
	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
s of gyration $r_y$	<b>0</b>	844	1270	766	1150	694	1040	633	951	571	859
	<b>6</b>	811	1220	735	1110	667	1000	607	913	548	824
	<b>7</b>	800	1200	725	1090	657	987	598	899	540	811
	<b>8</b>	787	1180	713	1070	646	971	588	884	531	798
	<b>9</b>	772	1160	699	1050	634	952	577	867	520	782
	<b>10</b>	756	1140	685	1030	620	932	565	849	509	765
<b>11</b>	739	1110	669	1010	606	910	551	828	497	747	

Steel Columns 12  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## Beam-Column Design

- moment magnification ( $P-\Delta$ )

$$M_u = B_1 M_{max-factored} \quad B_1 = \frac{C_m}{1 - (P_u/P_{e1})}$$

$C_m$  – modification factor for end conditions

$$= 0.6 - 0.4(M_1/M_2) \text{ or } 0.85 \text{ restrained, } 1.00 \text{ unrestrained}$$

$P_{e1}$  – Euler buckling strength  $P_{e1} = \frac{\pi^2 EA}{(Kl/r)^2}$

Steel Columns 15  
Lecture 18

Elements of Architectural Structures  
ARCH 614

F2011abn

## Beam-Column Design

- LRFD Steel

$$\text{– for } \frac{P_r}{P_c} \geq 0.2 : \quad \frac{P_u}{\phi_c P_n} + \frac{8}{9} \left( \frac{M_{ux}}{\phi_b M_{nx}} + \frac{M_{uy}}{\phi_b M_{ny}} \right) \leq 1.0$$

$$\text{– for } \frac{P_r}{P_c} < 0.2 : \quad \frac{P_u}{2\phi_c P_n} + \left( \frac{M_{ux}}{\phi_b M_{nx}} + \frac{M_{uy}}{\phi_b M_{ny}} \right) \leq 1.0$$

$P_r$  is required,  $P_c$  is capacity

$\phi_c$  - resistance factor for compression = 0.9

$\phi_b$  - resistance factor for bending = 0.9


Steel Columns 17  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2007abn

## Design Steps Knowing Loads (revisited)

1. assume limiting stress
  - buckling, axial stress, combined stress
2. solve for  $r$ ,  $A$  or  $S$
3. pick trial section
4. analyze stresses
5. section ok?
6. stop when section is ok

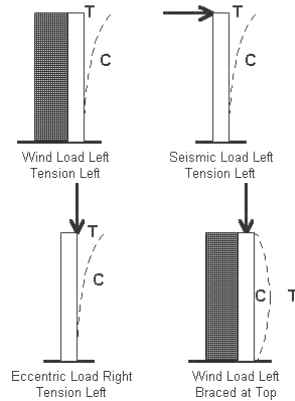

Steel Columns 18  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2009abn

## Rigid Frame Design (revisited)


- columns in frames

- ends can be “flexible”
- stiffness affected by beams and column =  $EI/L$

$$G = \Psi = \frac{\sum EI/l_c}{\sum EI/l_b}$$

- for the joint

- $l_c$  is the column length of each column
- $l_b$  is the beam length of each beam
- measured center to center





Steel Columns 19  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2009abn

## Rigid Frame Design (revisited)

- column effective length,  $k$

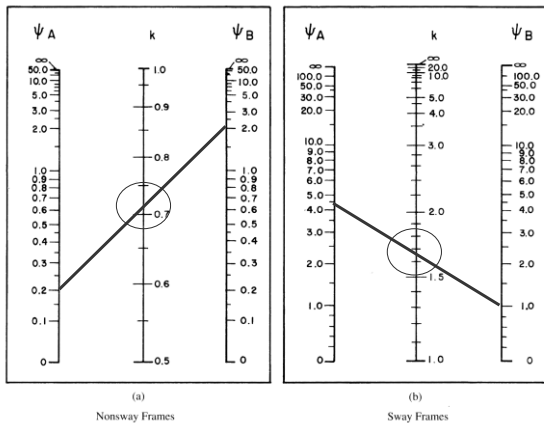

Steel Columns 20  
Lecture 18

Elements of Architectural Structures  
ARCH 614

S2009abn