

## Equilibrium of Rigid Bodies


- *Definition:* Equilibrium is the state when all the external forces acting on a rigid body form a system of forces equivalent to zero. There will be no rotation or translation. The forces are referred to as balanced.

$$R_x = \sum F_x = 0 \quad R_y = \sum F_y = 0 \quad \text{AND} \quad \sum M = 0$$


- It is **ABSOLUTELY NECESSARY** to consider all the forces acting on a body (applied directly and indirectly) using a **FREE BODY DIAGRAM**. Omission of a force would ruin the conditions for equilibrium.

FREE BODY DIAGRAM STEPS:


1. Determine the free body of interest. (What body is in equilibrium?)
  2. Detach the body from the ground and all other bodies (“free” it).
  3. Indicate all external forces which include:
    - action on the free body by the \_\_\_\_\_
    - action on the free body by other bodies
    - the weigh effect (=force) of the free body itself (force due to gravity)
  4. All forces should be clearly marked with magnitudes and direction. The sense of forces should be those acting *on the body* not by the body.
  5. Dimensions/angles should be included for moment computations and force computations.
  6. Indicate the unknown forces, such as those reactions or constraining forces where the body is supported or connected. (*Text uses hashes on the unknown forces to distinguish them.*)
- *Reactions* can be categorized by the type of connections or supports. A reaction is a force with known line of action, or a force of unknown direction, or a force and a couple. The line of action of the force or direction of the moment is directly related to the motion that is prevented.



prevents motion:  
\_\_\_\_\_



prevents motion:  
\_\_\_\_\_  
\_\_\_\_\_



prevents:  
\_\_\_\_\_  
\_\_\_\_\_

**Reactions and Support Connections**

Structural Analysis, 4<sup>th</sup> ed., R.C. Hibbeler

**Table 2-1 Supports for Coplanar Structures**

Type of Connection	Idealized Symbol	Reaction	Number of Unknowns
(1) light cable weightless link			One unknown. The reaction is a force that acts in the direction of the cable or link.
(2) rollers rocker			One unknown. The reaction is a force that acts perpendicular to the surface at the point of contact.
(3) smooth contacting surface			One unknown. The reaction is a force that acts perpendicular to the surface at the point of contact.
(4) smooth pin-connected collar			One unknown. The reaction is a force that acts perpendicular to the surface at the point of contact.
(5) smooth pin or hinge			Two unknowns. The reactions are two force components.
(6) slider fixed-connected collar			Two unknowns. The reactions are a force and a moment.
(7) fixed support			Three unknowns. The reactions are the moment and the two force components.

- The line of action should be indicated on the FBD. The sense of direction is determined by the type of support. (Cables are in tension, etc...) *If the sense isn't obvious, assume a sense.* When the reaction value comes out positive, the assumption was correct. When the reaction value comes out negative, the assumption was *opposite* the actual sense. **DON'T CHANGE THE ARROWS ON YOUR FBD OR SIGNS IN YOUR EQUATIONS.**
- With the 3 equations of equilibrium, there can be no more than 3 unknowns. **COUNT THE NUMBER OF UNKNOWN REACTIONS.**

Example 1  
(similar to ex. on pg 65)

500 lb known

check:

reactions for the pin-type support at A =


reactions and components for the smooth surface at B =

# equations =

procedure:

Write summation of forces in x and y and set = 0.


Choose a place to take a moment. Summing moments at \_\_\_\_ means that  $A_x$ ,  $A_y$  and  $B_x$  have moment arms of zero.

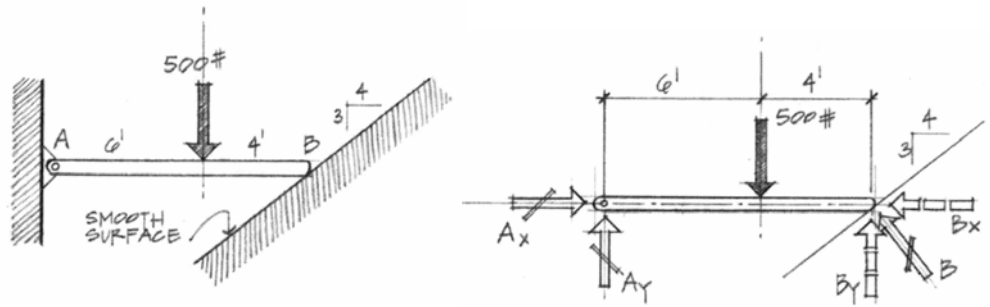

- The general rule is to sum at point where there are the most unknown reactions which usually results in one unknown left in the equation. This “point” could also be where two lines of action intersect.
- More than one moment equation can be used, *but it will not be unique*. Only 3 equations are unique. Variations:

$$\begin{array}{ccc} \sum F_x = 0 & \sum F_y = 0 & \sum M_1 = 0 \quad \text{or} \\ \sum F_x = 0 & \sum M_1 = 0 & \sum M_2 = 0 \quad \text{or} \\ \sum M_1 = 0 & \sum M_2 = 0 & \sum M_3 = 0 \end{array}$$

Recognizing support unknowns in FBD's


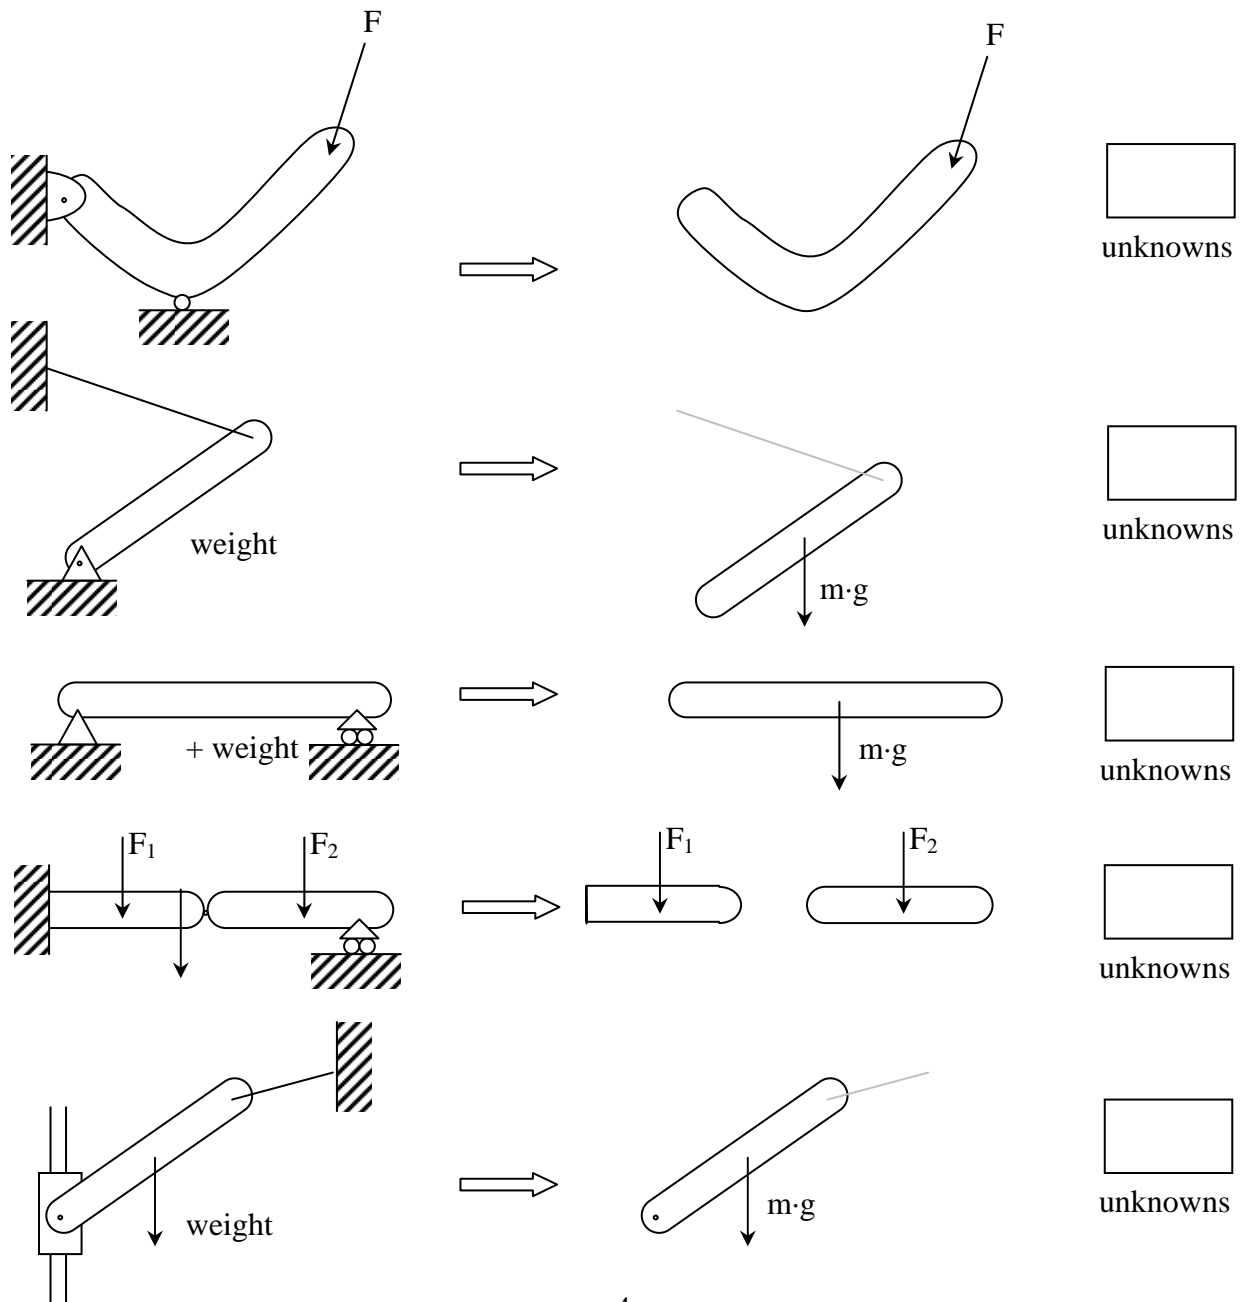


Example 2 (pg 63)

**Example Problem 3.7**

A cantilevered, stadium-type truss supports roof loads as shown in Figure 3.28.


A guying cable  $CA$  and a hinge support at  $B$  are provided for stability and equilibrium. Draw a FBD of the truss and solve for the support reaction  $B$  and the cable tension in  $CA$ . Neglect the truss weight.

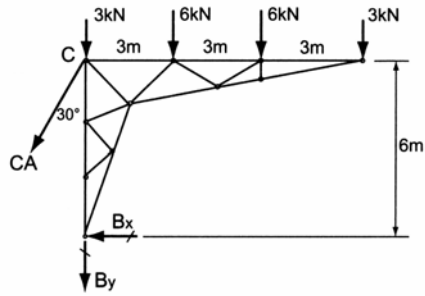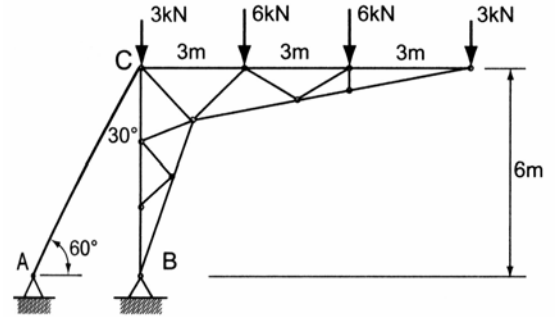

Example 3 (pg 67)

**Example Problem 3.10**

A utility pole is embedded firmly at the base and supports the two applied loads as shown in Figure 3.31a. Draw a FBD of the pole and determine the support reactions generated at the base  $E$  in response to the loading.

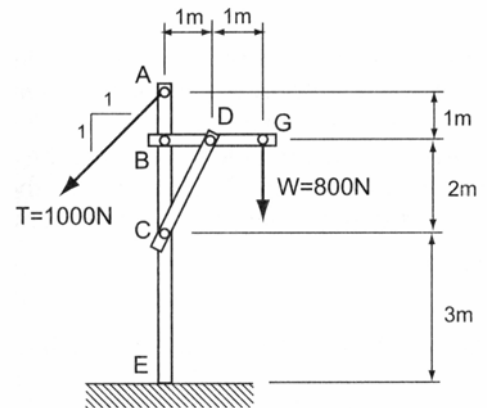


**Static Indeterminacy and Improper Constraints**

- *Definition:* A completely constrained rigid body has the same number of unknown reactions as number of equilibrium equations and cannot move under the loading conditions. The reactions are statically determinate.
- *Definition:* Statically indeterminate reactions appear on a rigid body when there are more unknown reactions than the number of equilibrium equations. The reactions that cannot be solved for are statically indeterminate. The degree of indeterminacy is the number of additional equations that would be needed to solve, i.e. one more = 1<sup>st</sup> degree, 2 more = 2<sup>nd</sup> degree...

Example of Static Indeterminacy:


Find the reactions on the cantilever when a pin is added at C

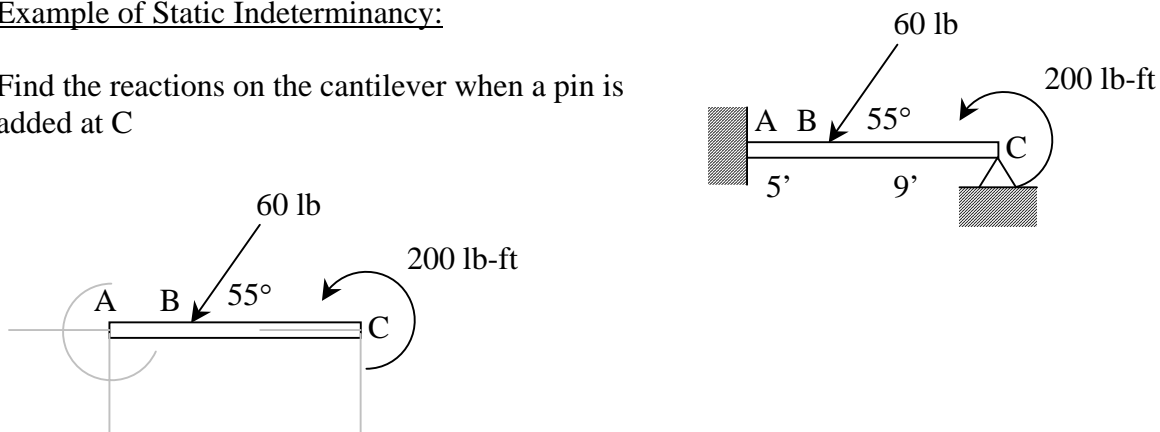

- *Definition:* When the support conditions provide the same or less unknown reactions as the equations of equilibrium *but allow the structure to move (not equilibrium)*, the structure is considered partially constrained. This occurs when the reactions must be either **concurrent** or **parallel**.

Example of Partial Constraints:

Find the reactions when the pin support at A changes to a roller

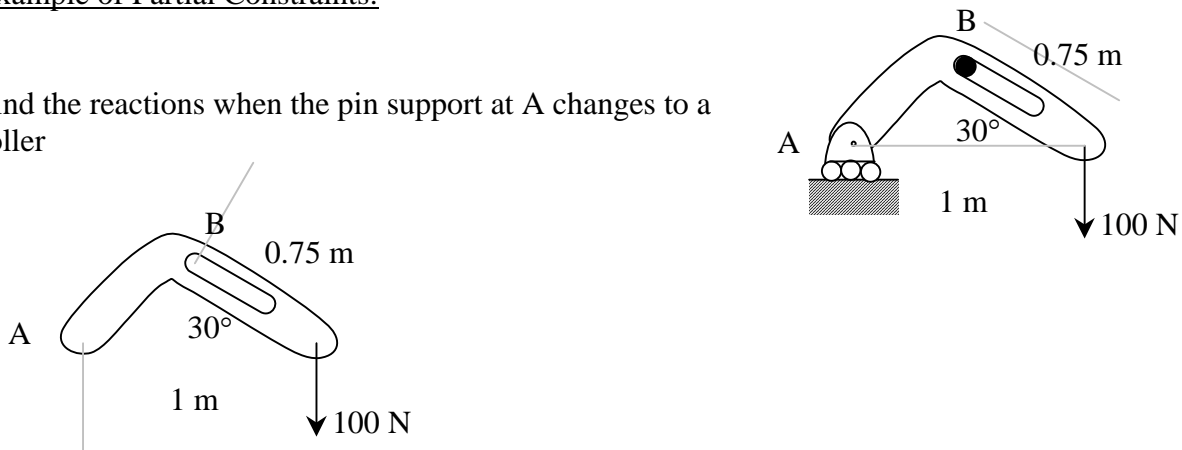

- The condition of at most as many unknown reactions as equilibrium equations is necessary for static determinacy, but isn't sufficient. *The supports must completely constrain the structure.*
- We'd like to avoid partial or improper constraint in the design of our structures. However, some structures with these types of constraints may not collapse. They may move. Or they may require advanced analysis to find reaction forces.



Example of Partial Constraints and Static Indeterminacy:

Find the weight and reactions when the sleeve track is horizontal

$k = 5 \text{ N/mm}$


$k(\Delta l) = F$  by spring

length of unstretched spring = 450 mm

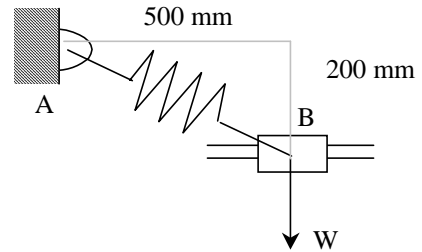


**Rigid Body Cases:**


1. Two-force body: Equilibrium of a body subjected to two forces on two points requires that those forces be \_\_\_\_\_ and \_\_\_\_\_ and act in the same line of action.



(A)




(B)

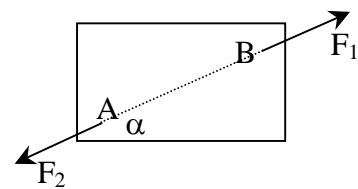

(C)

2. Three-force body: Equilibrium of a body subjected to three forces on three points requires that the line of action of the forces be concurrent (intersect) or parallel AND that the resultant equal zero.

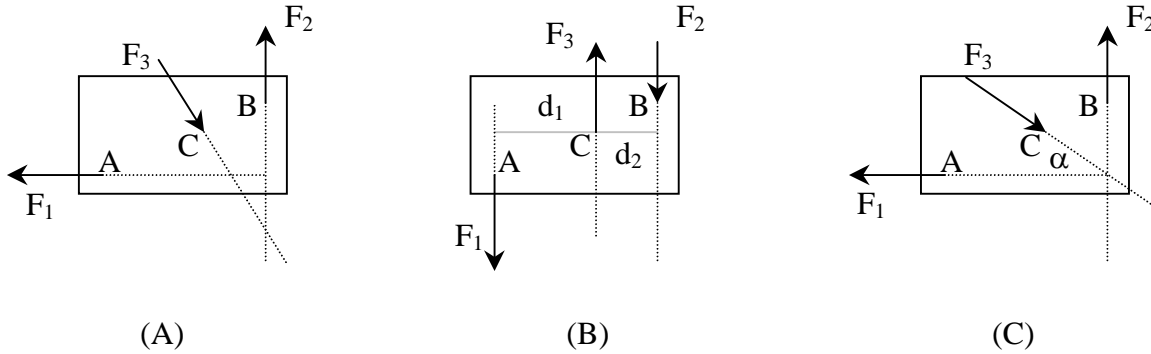

### Cables with Several Concentrated Loads or Fixed Geometry

- In order to completely constrain cables, the number of unknown support reactions *will be more* than the available number of equilibrium equations. We can solve because we have additional equations from geometry due to the \_\_\_\_\_ of the cable.
- The tension in the cable IS NOT the same everywhere, but the horizontal component in a cable segment WILL BE.

