

**ARCHITECTURAL STRUCTURES I:  
STATICS AND STRENGTH OF MATERIALS**

**ENDS 231**

**DR. ANNE NICHOLS**

**SPRING 2007**

*lecture*  
**eighteen**


**beams:**

**bending and shear**




# Beam Bending

- Galileo
  - relationship between stress and depth<sup>2</sup>
- can see
  - top squishing
  - bottom stretching
- what are the stress across the section?

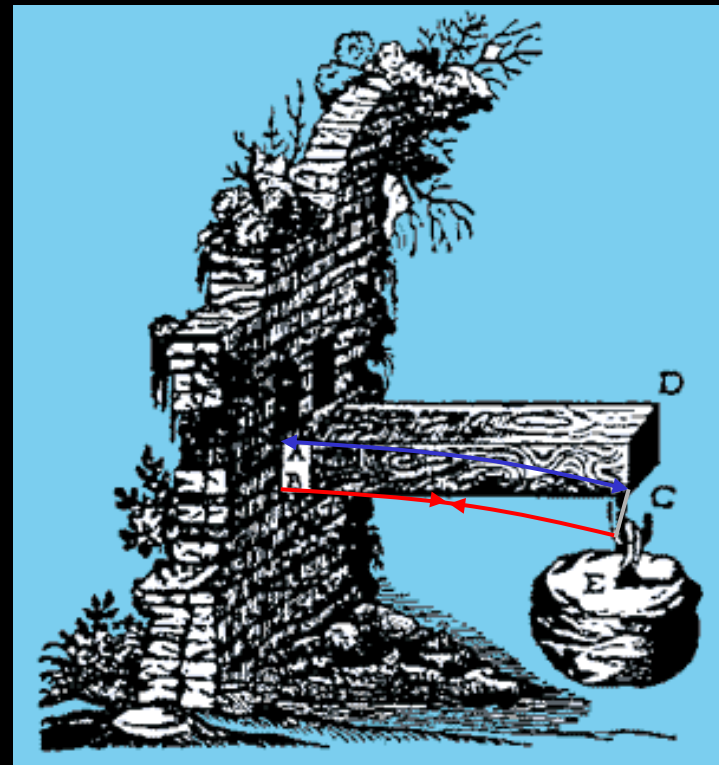



# Pure Bending

- *bending only*
- *no shear*
- *axial normal stresses from bending can be found in*
  - *homogeneous materials*
  - *plane of symmetry*
  - *follow Hooke's law*

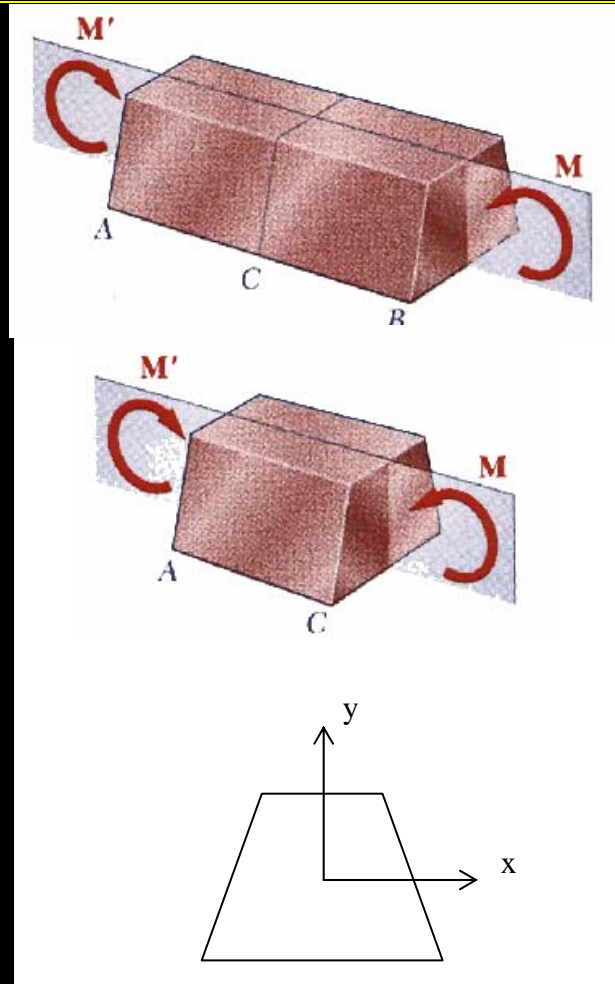

# Bending Moments

- *sign convention:*

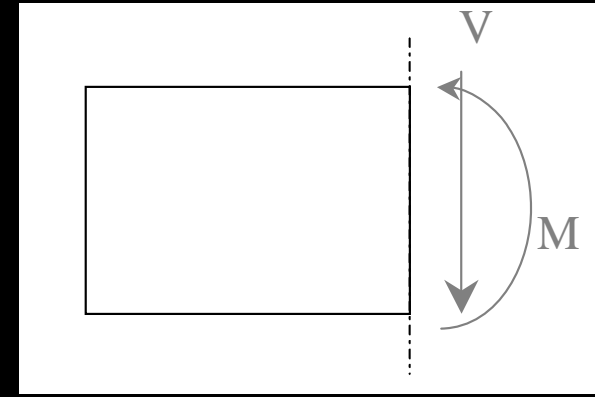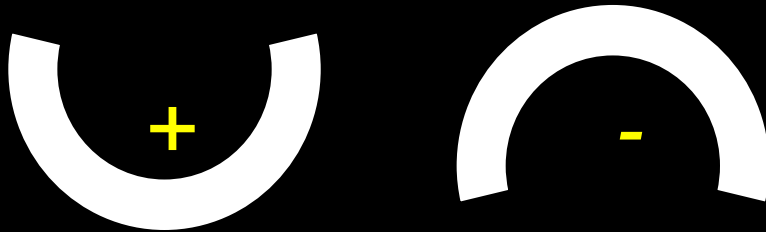

- *size of maximum internal moment will govern our design of the section*

# Normal Stresses

- *geometric fit*
  - *plane sections remain plane*
  - *stress varies linearly*

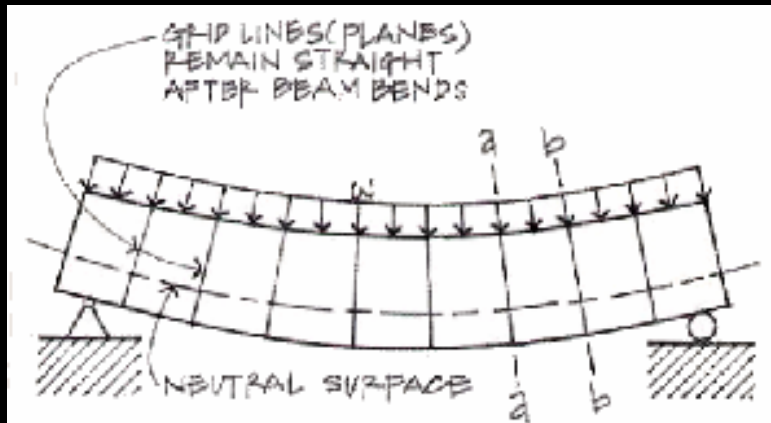


Figure 8.5(b) Beam bending under load.


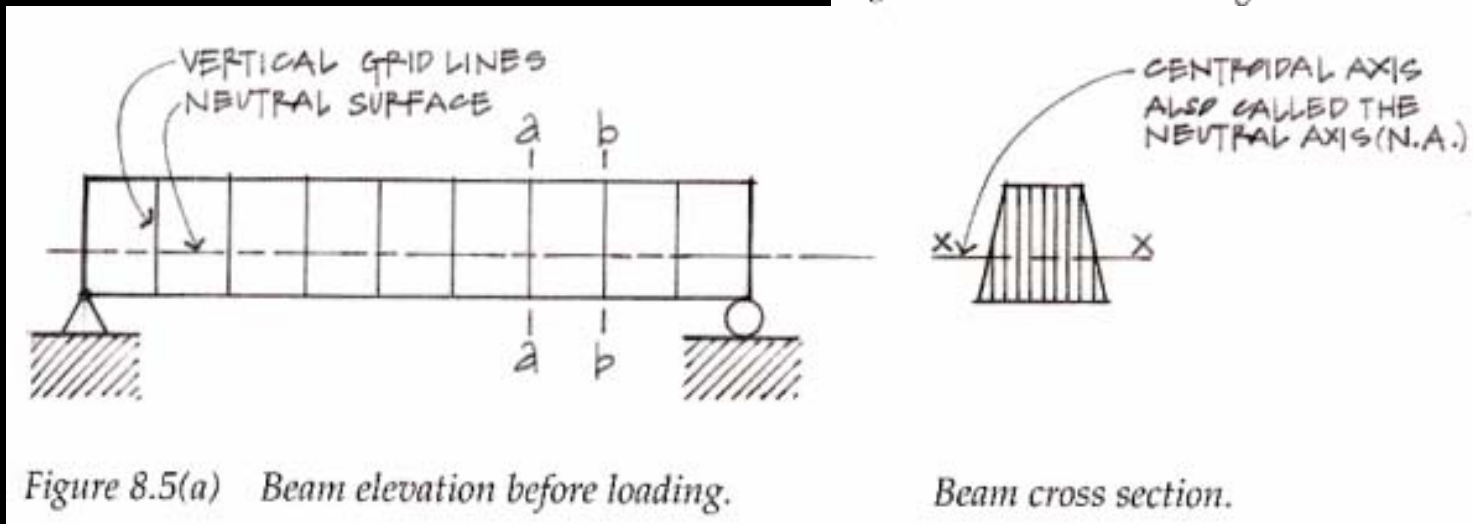


Figure 8.5(a) Beam elevation before loading.

Beam cross section.

# Neutral Axis

- *stresses vary linearly*
- *zero stress occurs at the centroid*
- *neutral axis is line of centroids (n.a.)*

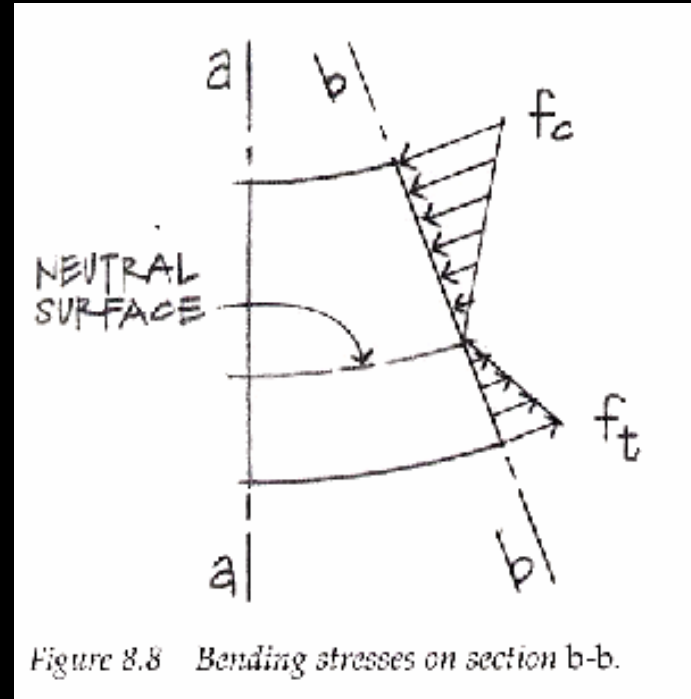


# Derivation of Stress from Strain

- *pure bending = arc shape*

$$L = R\theta$$

$$L_{outside} = (R + y)\theta$$

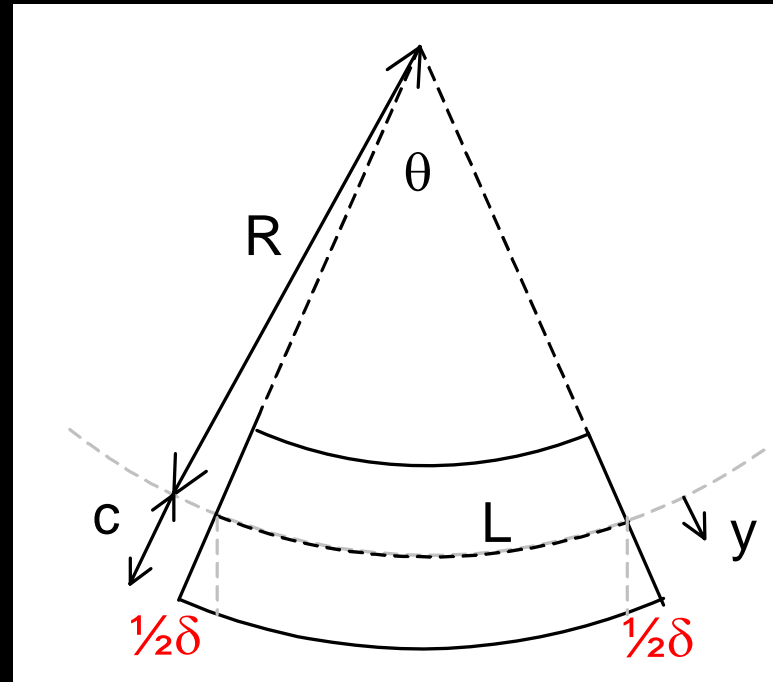

$$\epsilon = \frac{\delta}{L} = \frac{L_{outside} - L}{L} = \frac{(R + y)\theta - R\theta}{R\theta} = \frac{y}{R}$$


# Derivation of Stress

- zero stress at n.a.

$$f = E\varepsilon = \frac{Ey}{R}$$

$$f_{\max} = \frac{Ec}{R}$$

$$f = \frac{y}{c} f_{\max}$$

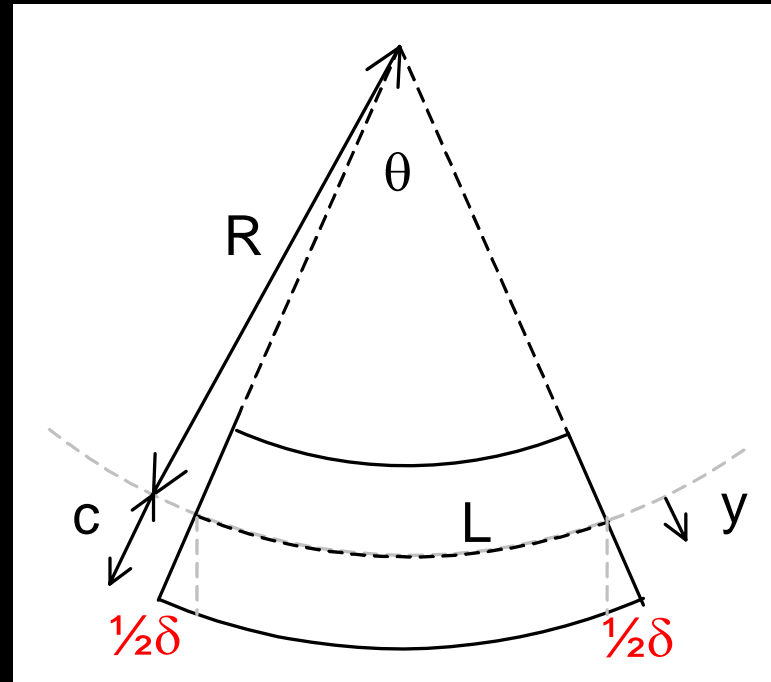



# Bending Moment

- resultant moment from stresses = bending moment!

$$M = \sum f y \Delta A$$

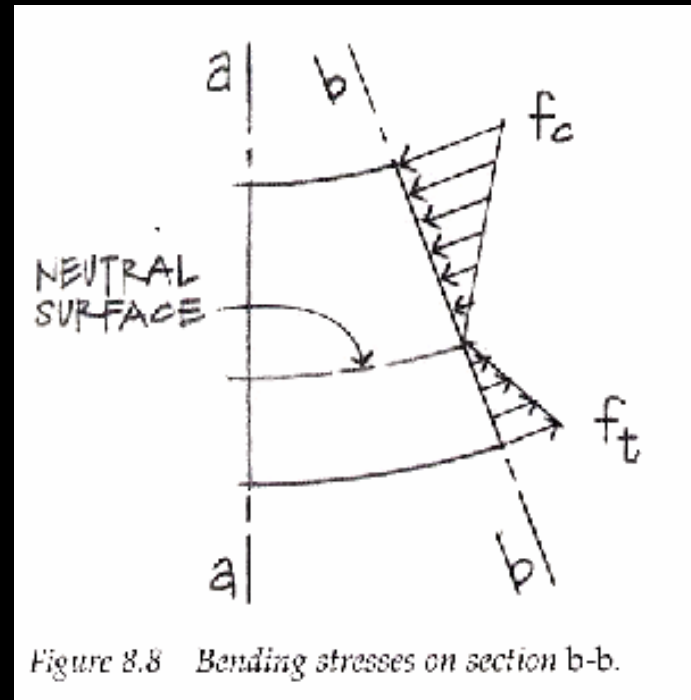



Figure 8.8 Bending stresses on section b-b.

$$= \sum \frac{y f_{max}}{c} y \Delta A = \frac{f_{max}}{c} \underline{\sum y^2 \Delta A} = \frac{f_{max}}{c} I = f_{max} S$$

# Bending Stress Relations

---

$$\frac{1}{R} = \frac{M}{EI}$$

*curvature*

$$f_b = \frac{My}{I}$$

*general bending stress*

$$S = \frac{I}{c}$$

*section modulus*

$$f_b = \frac{M}{S}$$

*maximum bending stress*

$$S_{required} \geq \frac{M}{F_b}$$

*required section modulus for design*