

lecture
 twenty six

steel connections:
 bolts, welds &
 tension members




Connections 1
 Lecture 26

Architectural Structures I
 ENDS 231


F2005abn

Connections

- needed to:
 - support beams by columns
 - connect truss members
 - splice beams or columns
- transfer load
- subjected to
 - tension or compression
 - shear
 - bending



(a) Framed beam (shear) connection.
 $e = \text{Eccentricity}; M = P \times e$



(b) Moment connection (rigid frame).
 $M = \text{Moment due to beam bending}$


Connections 5
 Lecture 26

Architectural Structures I
 ENDS 231

S2004abn

Bolts

- bolted steel connections

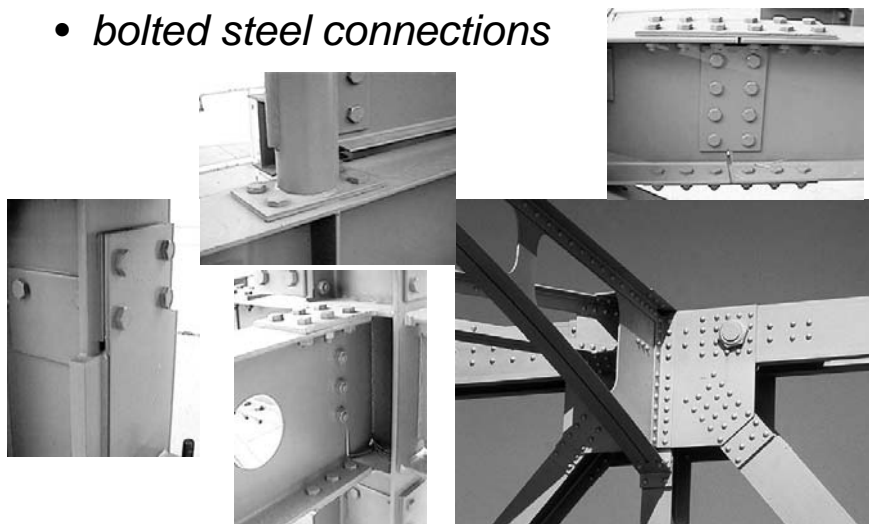

Connections 6
 Lecture 26

Architectural Structures I
 ENDS 231

S2004abn

Welds

- welded steel connections




Connections 7
 Lecture 26

Architectural Structures I
 ENDS 231

S2004abn

Fasteners

- wood connections

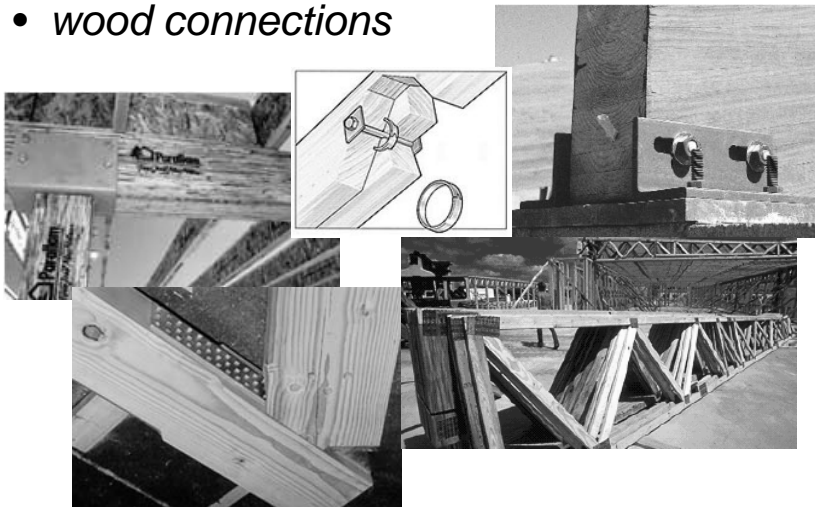


Connections 8
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Bolted Connection Design

- considerations
 - bearing stress
 - yielding
 - shear stress
 - single & double
 - member
 - rupture

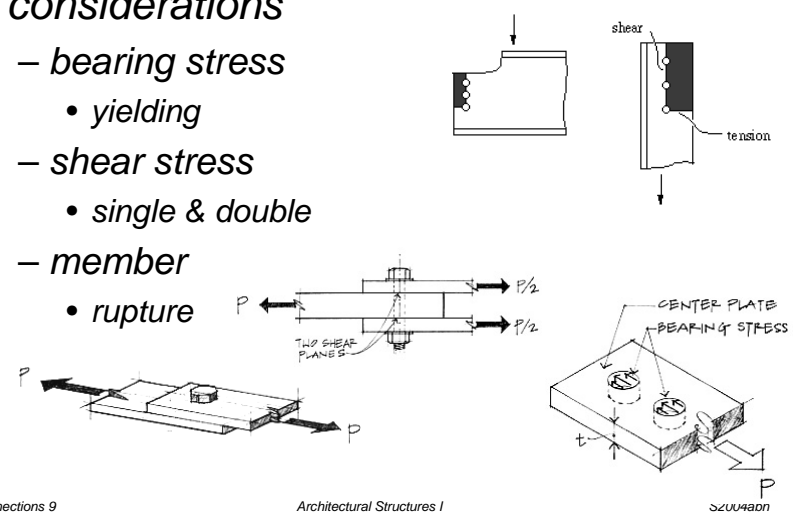

Connections 9
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Bolted Connection Design

- ASD steel
 - shear:

$$f_v \leq F_v$$

- bolt strengths
- single & double
- bolt types
 - A325-SC, A490-SC
 - A325-N, A490-N
 - A325-X, A490-X

BOLTS, THREADED PARTS AND RIVETS
Shear
Allowable load in kips

| | | TABLE SHEAR | | Nominal Diameter d, in. | | | | | | | | | | | | |
|-------------------------------|------------------------------|-------------------------------|----------------------|---|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|-------|
| ASTM Designation | Connection Type ^a | Hole Type ^b | F _v , ksi | Load Type ^c | 3/8 | 1/2 | 3/4 | 1 | 1 1/4 | 1 1/2 | 1 3/4 | 2 | 2 1/2 | 3 | | |
| | | | | Area (Based on Nominal Diameter) in. ² | | | | | | | | | | | | |
| Bolts | A307 | NSL | 100 | S | 3.068 | 4.418 | 6.075 | 7.634 | 9.990 | 12.777 | 16.665 | 21.667 | 28.171 | 36.433 | 46.333 | |
| | | | | D | 5.1 | 8.8 | 12.0 | 15.7 | 19.9 | 24.5 | 29.7 | 35.3 | 41.4 | 48.0 | 55.1 | |
| | | SC ^d Class A | 17.0 | S | 3.22 | 4.57 | 6.23 | 7.89 | 10.25 | 13.11 | 16.47 | 20.33 | 24.69 | 29.55 | 34.91 | 40.77 |
| | | | | D | 5.22 | 7.51 | 10.2 | 13.4 | 16.8 | 20.9 | 25.2 | 30.0 | 35.3 | 41.1 | 47.4 | 54.1 |
| | | | OVS, SSL | 15.0 | S | 4.60 | 6.50 | 8.90 | 11.8 | 14.9 | 18.4 | 22.3 | 26.5 | 31.1 | 36.1 | 41.5 |
| | | | | | D | 9.20 | 13.0 | 17.8 | 23.6 | 29.8 | 37.4 | 45.0 | 53.0 | 61.5 | 70.5 | 80.0 |
| | A325 | NSL | 12.0 | D | S | 3.588 | 5.30 | 7.22 | 9.42 | 11.9 | 14.7 | 17.8 | 21.2 | 25.0 | 29.1 | |
| | | | | | D | 7.36 | 10.6 | 14.4 | 18.8 | 23.9 | 29.4 | 35.6 | 42.4 | 49.6 | 57.0 | 64.8 |
| | | SC ^d Class A | 21.0 | D | S | 6.44 | 9.26 | 12.6 | 16.5 | 20.9 | 25.6 | 31.2 | 37.1 | 43.4 | 50.0 | |
| | | | | | D | 12.88 | 18.5 | 25.3 | 33.0 | 41.7 | 51.5 | 62.4 | 74.2 | 86.8 | 100.0 | |
| | | | OVS, SSL | 18.0 | D | S | 6.52 | 9.26 | 12.6 | 16.5 | 20.9 | 25.6 | 31.2 | 37.1 | 43.4 | |
| | | | | | | D | 11.0 | 15.9 | 21.6 | 28.3 | 35.6 | 44.2 | 53.5 | 63.6 | 74.2 | |
| A490 | NSL | 15.0 | D | S | 4.60 | 6.50 | 8.90 | 11.8 | 14.9 | 18.4 | 22.3 | 26.5 | 31.1 | | | |
| | | | | D | 9.20 | 13.0 | 17.8 | 23.6 | 29.8 | 37.4 | 45.0 | 53.0 | 61.5 | 70.5 | | |
| | SC ^d Class A | 28.0 | D | S | 8.5 | 12.4 | 16.6 | 22.0 | 27.8 | 34.4 | 41.6 | 49.3 | 57.4 | | | |
| | | | | D | 17.0 | 24.8 | 33.2 | 44.0 | 55.7 | 69.7 | 85.2 | 102.0 | 119.0 | | | |
| | | OVS, SSL | 40.0 | D | S | 12.3 | 17.7 | 24.1 | 31.4 | 39.6 | 49.1 | 59.4 | 70.7 | | | |
| | | | | | D | 24.5 | 35.3 | 48.1 | 62.8 | 79.6 | 99.2 | 119.0 | 141.0 | | | |
| Rivets | A502-1 | NSL | 17.5 | D | S | 5.4 | 7.7 | 10.6 | 13.7 | 17.4 | 21.8 | 26.9 | 32.8 | | | |
| | | | | | D | 10.7 | 15.5 | 21.0 | 27.6 | 34.6 | 42.8 | 52.0 | 61.8 | | | |
| | A502-3 | 22.0 | D | S | 6.7 | 9.7 | 13.2 | 17.3 | 21.9 | 27.0 | 32.7 | 38.9 | | | | |
| | | | | D | 13.4 | 19.4 | 26.5 | 34.6 | 43.7 | 54.0 | 65.3 | 77.7 | | | | |
| | | A36 (F _v = 58 ksi) | NSL | 8.8 | D | S | 3.0 | 4.4 | 6.0 | 7.8 | 10.1 | 12.7 | 15.7 | | | |
| | | | | | | D | 6.0 | 8.7 | 11.9 | 15.6 | 19.7 | 25.3 | 29.4 | 35.0 | | |
| A36 (F _v = 58 ksi) | NSL | 12.8 | D | S | 3.9 | 5.7 | 7.7 | 10.1 | 12.7 | 15.7 | 19.3 | | | | | |
| | | | | D | 7.8 | 11.4 | 15.4 | 20.2 | 25.4 | 31.4 | 38.0 | 45.0 | | | | |

Connections 10
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Bolted Connection Design

- ASD steel
 - bearing:
 - bolts rarely fail by bearing
 - other part fails first

BOLTS AND THREADED PARTS
Bearing
Allowable loads in kips

| Material Thickness | TABLE BEARING Slip-critical and Bearing-type Connections | | | | | | | | | | | |
|--------------------|---|------|------|-----------------------------------|------|------|-----------------------------------|------|------|------------------------------------|-------|-------|
| | F _v = 58 ksi Bolt dia. | | | F _v = 65 ksi Bolt dia. | | | F _v = 70 ksi Bolt dia. | | | F _v = 100 ksi Bolt dia. | | |
| | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 |
| 1/4 | 6.5 | 7.6 | 8.7 | 7.3 | 8.5 | 9.6 | 7.9 | 9.2 | 10.5 | 11.3 | 13.1 | 15.0 |
| 3/8 | 9.8 | 11.4 | 13.1 | 11.0 | 12.8 | 14.6 | 11.8 | 13.8 | 15.6 | 16.9 | 19.7 | 22.5 |
| 1/2 | 13.1 | 15.2 | 17.4 | 14.6 | 17.1 | 19.5 | 15.8 | 18.4 | 21.0 | 22.5 | 26.3 | 30.0 |
| 5/8 | 16.3 | 19.0 | 21.8 | 18.3 | 21.3 | 24.4 | 19.7 | 23.0 | 26.3 | 28.1 | 32.8 | 37.5 |
| 3/4 | 19.5 | 22.8 | 26.1 | 21.9 | 25.6 | 29.3 | 23.6 | 27.6 | 31.5 | 33.8 | 39.4 | 45.0 |
| 7/8 | 22.8 | 26.6 | 30.5 | 25.9 | 29.9 | 34.1 | 27.6 | 32.2 | 36.6 | 39.4 | 45.9 | 52.5 |
| 1 | 26.1 | 30.5 | 34.8 | 29.3 | 34.1 | 38.0 | 31.5 | 36.8 | 42.0 | 45.9 | 52.5 | 60.0 |
| 5/8 | 29.4 | 34.3 | 39.2 | 32.9 | 38.4 | 43.6 | 4.3 | 47.3 | 52.5 | 59.4 | 67.5 | 76.5 |
| 3/4 | 32.9 | 38.1 | 43.5 | 36.9 | 42.7 | 48.8 | 45.6 | 52.5 | 59.4 | 67.5 | 76.5 | 86.0 |
| 7/8 | 36.1 | 41.9 | 47.9 | 40.9 | 47.9 | 54.9 | 49.8 | 57.8 | 65.8 | 74.8 | 84.0 | 94.0 |
| 1 | 39.4 | 45.6 | 52.2 | 44.1 | 51.1 | 58.1 | 52.5 | 60.5 | 69.0 | 78.0 | 88.0 | 99.0 |
| 1 1/4 | 52.2 | 60.9 | 69.6 | 58.5 | 68.3 | 78.0 | 63.0 | 73.5 | 84.0 | 90.0 | 105.0 | 120.0 |


Connections 11
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Tension Members

- steel members can have holes
- reduced area
- increased stress

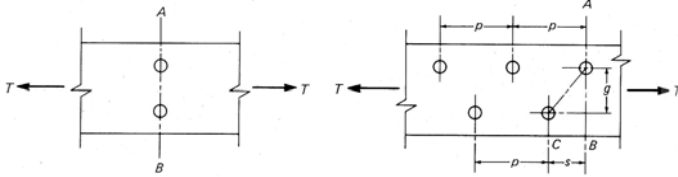


Connections 12
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Effective Net Area

- likely path to “rip” across
- bolts divide transferred force too

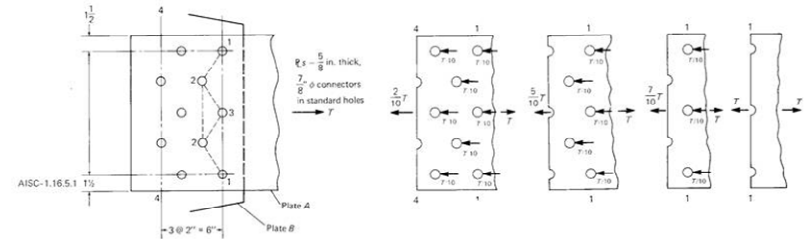

Connections 13
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

ASD – Tension Members

- non-pin connected members:
 - $F_t = 0.60F_y$ on gross area
 - $F_t = 0.50F_u$ on net area
- pin connected members:
 - $F_t = 0.45F_y$ on net area
- threaded rods of approved steel:
 - $F_t = 0.33F_u$ on major diameter
 - (for static loading only)



Connections 11
Lecture 23

Architectural Structures I
ENDS 231

Su2005abn


LRFD - Tension Members

- limit states for failure $P_u \leq \phi_t P_n$

1. yielding $\phi_t = 0.9$ $P_n = F_y A_g$

2. rupture* $\phi_t = 0.75$ $P_n = F_u A_e$

A_g - gross area
 A_e - effective net area
 F_u - tensile strength
 of the steel (ultimate)

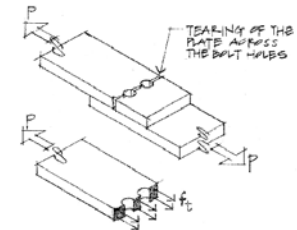



Connections 15
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Welded Connection Design

- considerations
 - shear stress
 - yielding
 - rupture

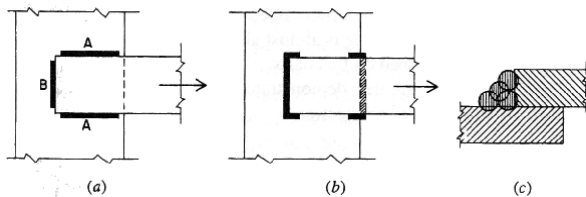


Connections 16
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Welded Connection Design

- weld terms
 - butt weld
 - fillet weld
 - plug weld
 - throat
- weld materials
 - E60XX
 - E70XX
$$F_{EXX} = 70 \text{ ksi}$$

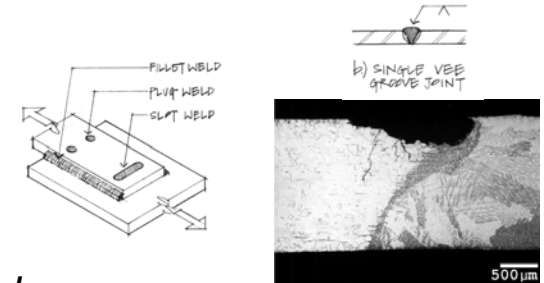

| Material Thickness of Thicker Part Joined, in. (mm) | Minimum Size of Fillet Weld(a) in. (mm) |
|---|---|
| To 1/4 (6) inclusive | 1/4 (3) |
| Over 1/4 (6) to 1/2 (13) | 3/8 (5) |
| Over 1/2 (13) to 3/4 (19) | 1/2 (6) |
| Over 3/4 (19) | 5/8 (8) |

(a) Leg dimension of fillet welds. Single pass welds must be used.
(b) See Section J2.25 for maximum size of fillet welds.


Connections 17
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Welded Connection Design

- ASD
 - shear $f_v \leq F_v$
 - $F_v = 0.30F_{weld}$
 - throat
 - $T = 0.707 \times \text{weld size}$
 - area
 - $A = T \times \text{length of weld}$
 - weld metal generally stronger than base metal (ex. $F_y = 50 \text{ ksi}$)

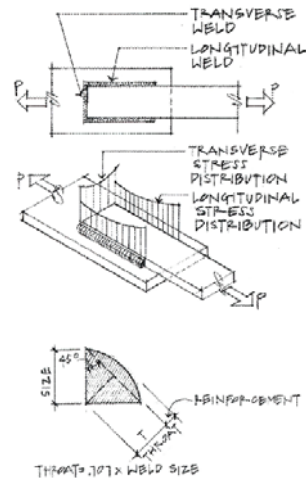


Connections 18
Lecture 26

Architectural Structures I
ENDS 231

S2004abn

Framed Beam Connections

- angles
 - bolted
 - welded

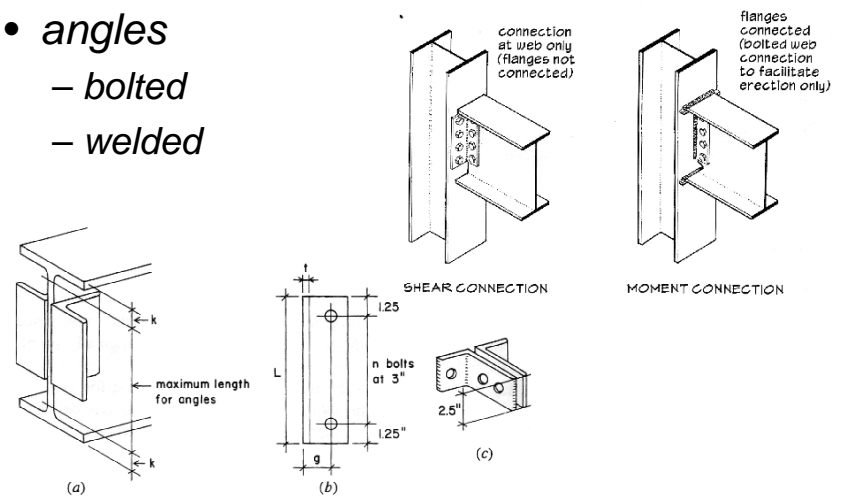



Connections 19
Lecture 26

Architectural Structures I
ENDS 231

S2004abn


Framed Beam Connections

- terms
 - coping

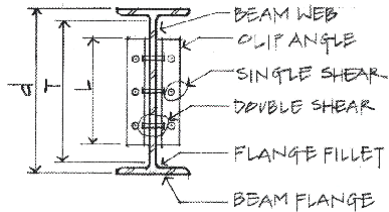


Beam Connections

- LRFD provisions
 - shear yielding
 - shear rupture
 - block shear rupture
 - tension yielding
 - tension rupture
 - local web buckling
 - lateral torsional buckling

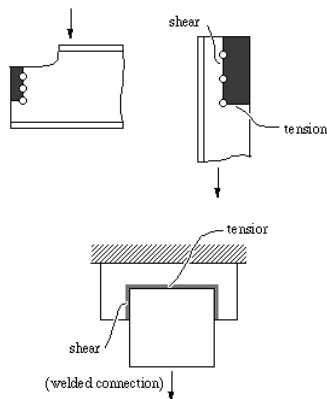

Framed Beam Connections

- tables for standard bolt holes & spacings
- $n = \# \text{ bolts}$
- angle leg thickness
- length needed

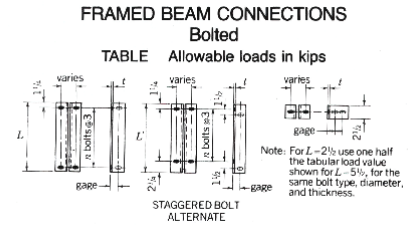

| Bolt Type | A325-N | | | A490-N | | | A325-X | | | A490-X | | | |
|---------------------------|--------|-----|------|--------|-----|------|--------|------------------|-----|--------|-----|-----|-----|
| | F, Ksi | | | | | | | | | | | | |
| | 21.0 | | | 28.0 | | | 30.0 | | | 40.0 | | | |
| Bolt Dia., d In. | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 | 3/4 | 7/8 | 1 | |
| Angle Thickness t, in. | 3/16 | 3/8 | 3/4 | 3/8 | 1/2 | 3/4 | 3/8 | 3/4 | 3/4 | 1/2 | 3/4 | 3/4 | |
| L In. | | | | | | | | | | | | | |
| L' In. | | | | | | | | | | | | | |
| n | | | | | | | | | | | | | |
| 29 1/2 | 31 | 10 | 186 | 253 | 330 | 247 | 337 | 440 ^b | 285 | 361 | 481 | 353 | 481 |
| 26 1/2 | 28 | 9 | 167 | 227 | 297 | 223 | 303 | 396 ^b | 239 | 325 | 433 | 318 | 433 |
| 23 1/2 | 25 | 8 | 148 | 202 | 264 | 198 | 269 | 352 ^b | 212 | 289 | 385 | 283 | 385 |
| 20 1/2 | 22 | 7 | 130 | 177 | 231 | 173 | 236 | 308 ^b | 186 | 253 | 337 | 247 | 337 |
| 17 1/2 | 19 | 6 | 111 | 152 | 198 | 148 | 202 | 264 ^b | 159 | 216 | 283 | 212 | 289 |
| 14 1/2 | 16 | 5 | 92.8 | 128 | 165 | 124 | 168 | 220 ^b | 133 | 180 | 236 | 177 | 242 |
| 11 1/2 | 13 | 4 | 74.2 | 101 | 132 | 99.0 | 135 | 178 ^b | 106 | 144 | 188 | 141 | 192 |

ENDS 231

Beam Connections

- block shear rupture
- tension rupture



Figure 2-1. Block Shear Rupture Limit State
(Photo by J.A. Swanson and R. Lyon, courtesy of Georgia Institute of Technology)



Figure 2-14. Tension Fracture Limit State
(Photo by J.A. Swanson and R. Lyon, courtesy of Georgia Institute of Technology)