

ENDS 231. Assignment #8

Date: 10/23/07, due 11/1/07

Pass-fail work

Problems: from Onouye, Chapters 6 & 9 and 8A.


Note: Problems marked with a * have been altered with respect to the problem stated in the text.

(25%) 8A) A short 400 mm-square concrete pier is reinforced with four longitudinal #25 bars (25.23 mm diameter). It supports a load of 450 kN. Compute the stress in each material when $E_c = 24.9 \times 10^3$ MPa and $E_s = 207 \times 10^3$ MPa. (No figure.) [1 MPa = 10^6 N/m² = 1 N/mm²] (axial strain and elasticity)

Partial answer to check with: $f_c = 2.6$ MPa, $f_s = 21.4$ MPa

(15%) *Use US customary units.

6.4.8 An aluminum curtain wall panel 12' (3.66 m) high is attached to large concrete columns (top and bottom) when the temperature is 65°F (18.3°C). No provision is made for differential thermal movement vertically. Because of insulation between them, the sun heats up the wall panel to 120°F (48.9°C) but the column only to 80°F (26.7°C). Determine the consequent compressive stress in the curtain wall. (thermal stresses)

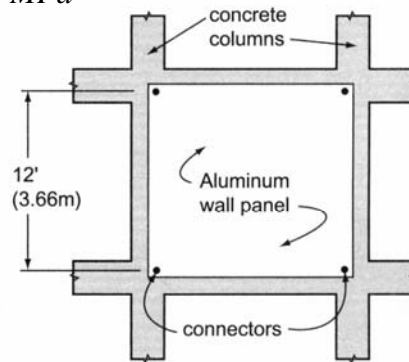


Problem 6.4.8

Partial answers to check with:

$$\delta_{restrained} = 0.0895 \text{ in, } f = 6,220 \text{ psi}$$


(15%) 9.1.1 A cantilever beam has a span of 9 feet with a concentrated load of 2000 lb. at its unsupported end. If a W8x18 is used ($F_b = 22$ ksi), is it safe? (flexural stress)

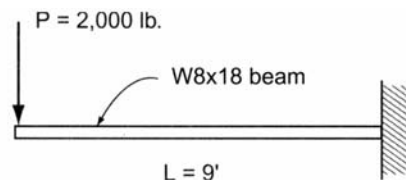

Problem 9.1.1

Partial answers to check with: $f_b = 14.2$ ksi (OK)

(25%)*9.1.4 A beam as shown supports a floor and partition where the floor load is assumed to be uniformly distributed 2500 lb/ft and the partition contributes a 5000 lb concentrated load. Select the lightest W8 steel section if $F_b = 22$ ksi. (flexural stress)

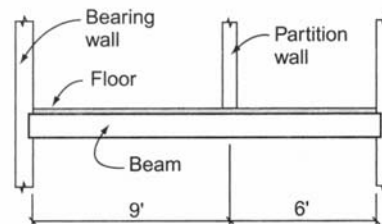


Problem 9.1.4

*The loads are changed to 2500 lb/ft and 5000 lb.

Partial answers to check with: $S_{req'd} \geq 46.97 \text{ in.}^3$

(20%)*9.1.9 Select the lightest ~~14" nominal depth~~ W beam to carry the load shown. Assume A992 steel ($F_b = 33$ ksi). (flexural stress)

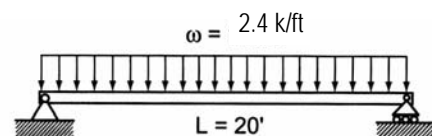

Problem 9.1.9

*The load is changed to 2.4 k/ft and the depth is not restricted. Assume A992 steel ($F_Y = 50$ ksi, $F_b = 33$ ksi).

Partial answers to check with: $S_{req'd} \geq 43.64 \text{ in.}^3$